

# INFINITY B

## ONE-SIDED EMERGENCY EXIT SIGNS



### SELF CONTAINED CONFIGURATION

CODE	POWER [W]	AUTONOMY [h]			MODE			OPTION			COLOR		
IFB	3,2	1	2	3	SE	SA	PT	AT	RS	WH	GR	BL	

### CENTRAL BATTERY CONFIGURATION

CODE	POWER [W]	SYSTEM	OPTION			COLOR		
IFB	3,2	CB	CBS	ADS	ADL	WH	GR	BL

### FZLV SYSTEM CONFIGURATION

CODE	POWER [W]	SYSTEM	COLOR		
IFB	3,2	FZLV	WH	GR	BL



\*see pictogram

#### Legend:

- SE - non maintained
- SA - maintained
- PT - manual test button
- AT - autotest
- RS - Rubic central monitoring
- FZLV - fixture for central battery FZLV 24 VDC
- CB - central battery
- CBS - central battery (circuit monitoring)
- ADS - central battery with address module ADS 20
- ADL - central battery with address module ADL
- IFB - fixture Infinity B
- WH - fixture in white color
- GR - fixture in grey color
- BL - fixture in black color

**MATERIALS:** White, grey or black polycarbonate body, Plexi glass

#### MOUNTING:

- Recessed (wall)
- Surface (wall)

#### POWER SUPPLY:

- Self contained – 220÷240VAC/50÷60Hz
- Central battery – 220÷240VAC/50÷60Hz; 216VDC
- Central battery FZLV – 24VDC

**LIGHT SOURCE:** 3,2W LED

**CHARGING:** Maximum 12h; energy-saving electronic impulse charger

**AUTONOMY AND BATTERIES:** 1h, 2h, 3h, Ni-MH batteries

**INSULATION CLASS:** II

**IP RATING:** IP44

**VIEWING DISTANCE:** 30m


**AMBIENT TEMPERATURE:**  $t_a$ : 0°C÷40°C

#### OPTIONS:

- SE – non maintained
- SA – maintained
- PT – manual test button
- AT – autotest
- RS – Rubic central monitoring
- FZLV – central battery FZLV 24V
- CB – central battery

#### ADDITIONAL INFORMATION:

- LED indicator signalizes mains power supply and battery charge
- Deep discharge protection
- III class of insulation of FZLV version

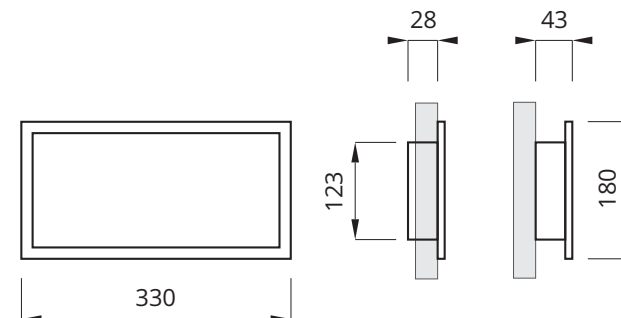

\*Emergency exit sign fixtures do not include any pictogram in the set. Pictograms have to be chosen and ordered as a separate item.