

Recessed LED luminaire. Body is made of steel and aluminium and it is available in all RAL colours. Light source – Fortimo Led Line 3R. Standard EVG ballast, Touch DALI version on request. Opal diffuser can be mounted on 2 different levels flat with the ring or recessed into the luminaire.

IP44

230 V
50 Hz


CE



High quality, energy efficient white LED light.

Perfect replacement for CFL downlights in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

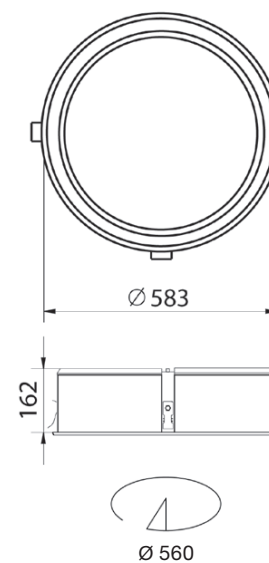

Index no.	Lumen output	Wattage	System efficacy	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003776.LL3900/830	6x650 lm	6x5,1W	128 lm/W	3000K	80 Ra	50,000 h	3,60 kg
0000-003776.LL3900/840	6x650 lm	6x5,1W	128 lm/W	4000K	80 Ra	50,000 h	3,60 kg
0000-003776.LL5200/830	8x650 lm	8x5,1W	128 lm/W	3000K	80 Ra	50,000 h	3,60 kg
0000-003776.LL5200/840	8x650 lm	8x5,1W	128 lm/W	4000K	80 Ra	50,000 h	3,60 kg