


Recessed LED luminaire with parabolic louvers designed for modular or gypsum ceiling. Total 42 W and up to 3600 lm output. Light source - Vossloch Schwabe Linear COB LED modules. Standard EVG ballast. Body is made of steel and aluminium and is available in all RAL colours.



IP20

230 V
50 Hz

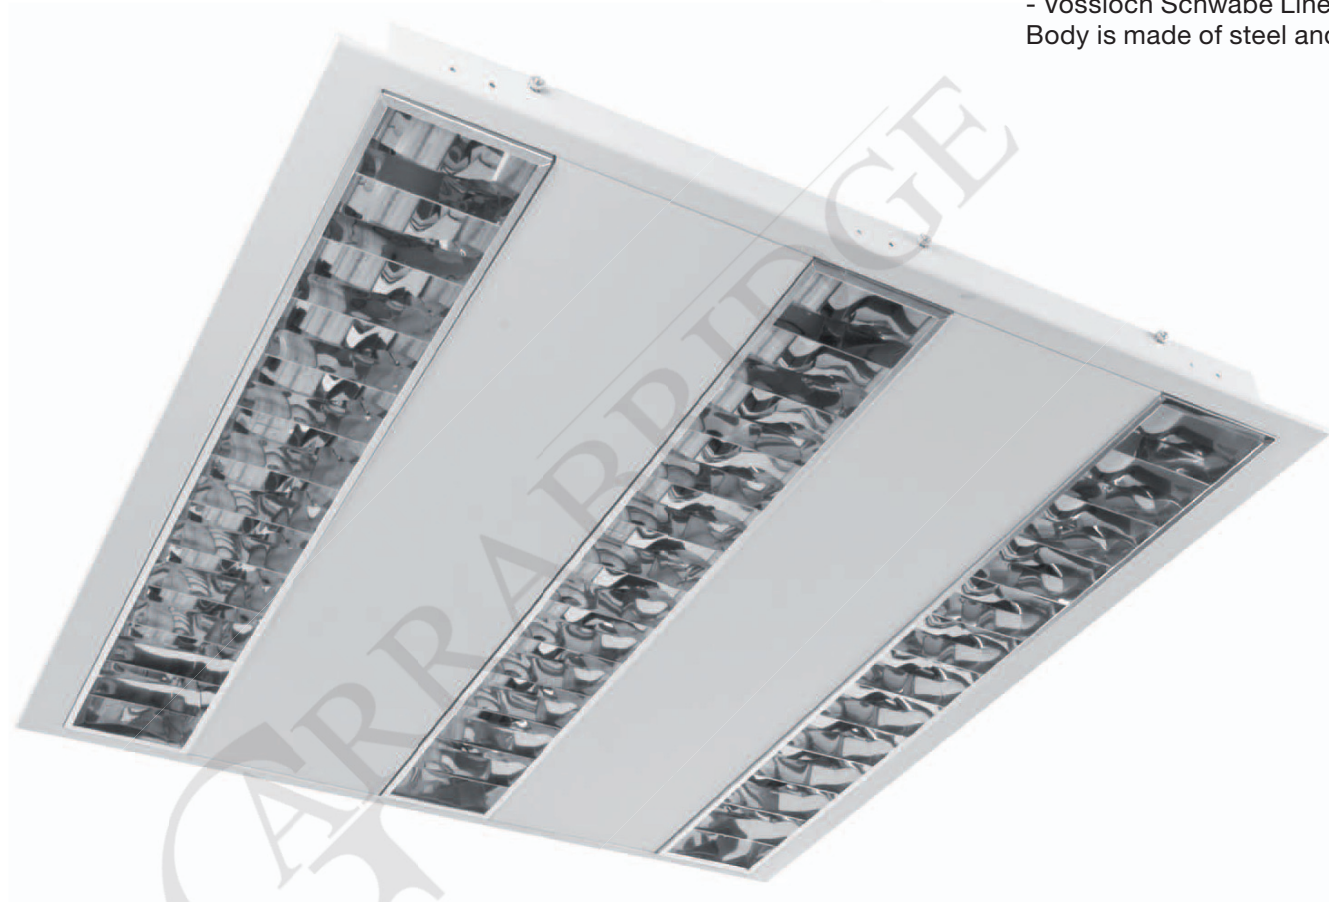


CE

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

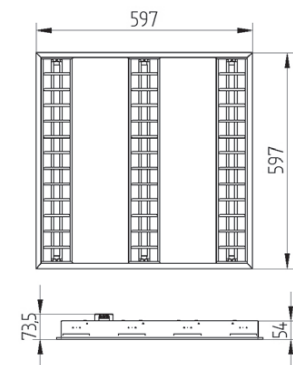

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003583.3300/830	3x(2x550 lm)	3x(2x7W)	3000K	80 Ra	50,000 h	3,30 kg
0000-003583.3600/840	3x(2x600 lm)	3x(2x7W)	3500K	80 Ra	50,000 h	3,30 kg