

Recessed LED luminaire with opal diffuser designed for modular ceiling. Light source - Fortimo LED Line or PrevaLED Linear. Standard EVG ballast, Touch DALI version on request. Body is made of steel and aluminium and is available in all RAL colours. Version for gypsum ceiling on request.


High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail



- IP20
- 230 V  
50 Hz
- F
- ⊕
- CE

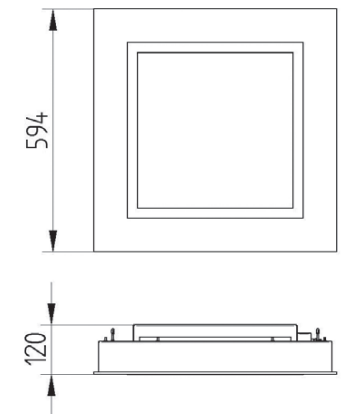

Index no.	Lumen output	Wattage	System efficacy	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003508.LL8800/830	8x1100 lm	8x9,1W	120 lm/W	3000K	80 Ra	50,000 h	7,20 kg
0000-003508.LL8800/840	8x1100 lm	8x9,1W	120 lm/W	4000K	80 Ra	50,000 h	7,20 kg