


Recessed LED luminaire with opal or acrylic diffuser. Light source - Fortimo LED Line or PrevaLED Linear. Standard EVG ballast, Touch DALI version on request. Body is made of aluminium profile and available in all RAL colours. This luminaire can be connected in long lighting lines. We can prepare it in different lengths and shapes on request.

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:


- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

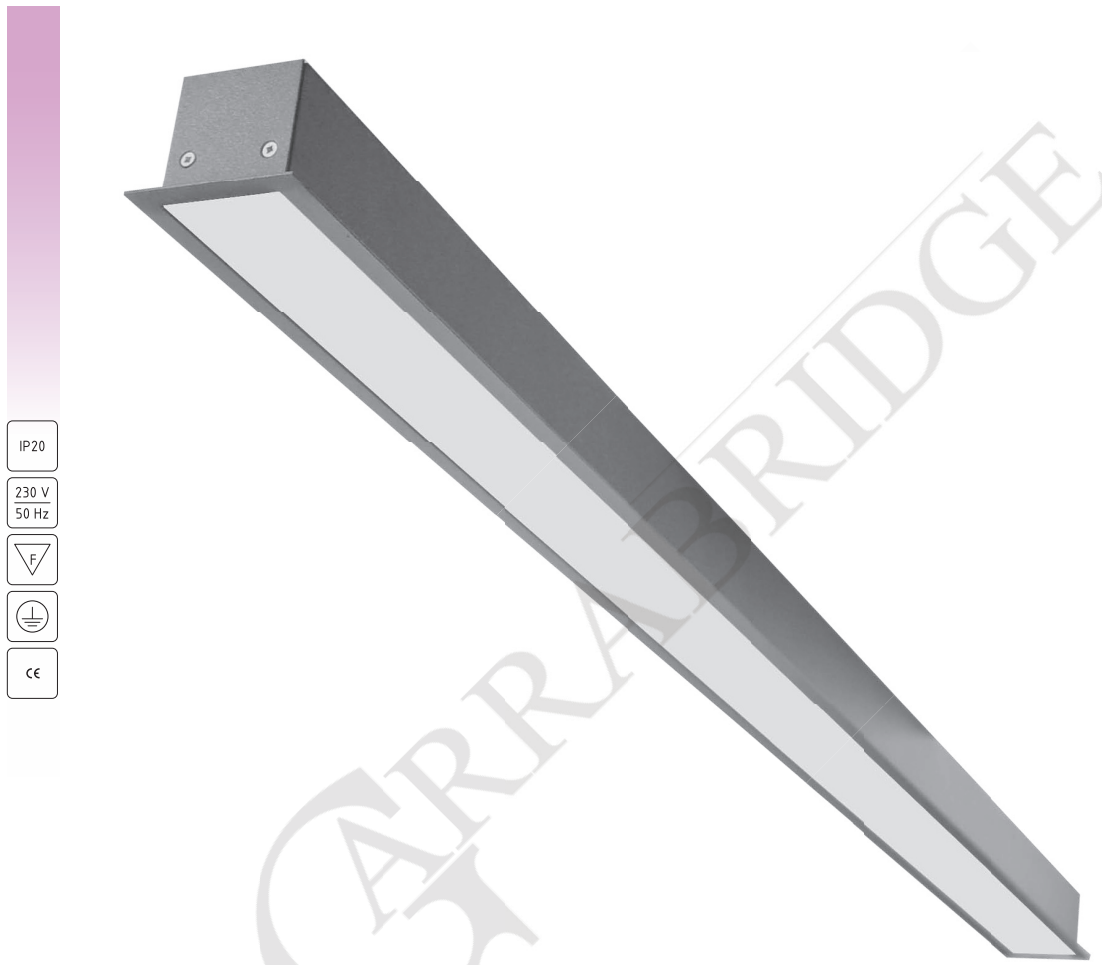

- IP20
- 230 V
50 Hz
- F
- ⊥
- CE



Index no.	Lumen output	Wattage	System efficacy	Colour temp.	Colour rendering index	Lifetime	Length	Weight
0000-003500.LL2200/830	2x1100 lm	2x9,1W	120 lm/W	3000K	80 Ra	50,000 h	595 mm	1,50 kg
0000-003500.LL2200/840	2x1100 lm	2x9,1W	120 lm/W	4000K	80 Ra	50,000 h	595 mm	1,50 kg
0000-003500.LL4400/830	4x1100 lm	4x9,1W	120 lm/W	3000K	80 Ra	50,000 h	1155 mm	2,00 kg
0000-003500.LL4400/840	4x1100 lm	4x9,1W	120 lm/W	4000K	80 Ra	50,000 h	1155 mm	2,00 kg
0000-003500.LL6600/830	6x1100 lm	6x9,1W	120 lm/W	3000K	80 Ra	50,000 h	1715 mm	3,00 kg
0000-003500.LL6600/840	6x1100 lm	6x9,1W	120 lm/W	4000K	80 Ra	50,000 h	1715 mm	3,00 kg
0000-003500.LL8800/830	8x1100 lm	8x9,1W	120 lm/W	3000K	80 Ra	50,000 h	2275 mm	4,00 kg
0000-003500.LL8800/840	8x1100 lm	8x9,1W	120 lm/W	4000K	80 Ra	50,000 h	2275 mm	4,00 kg

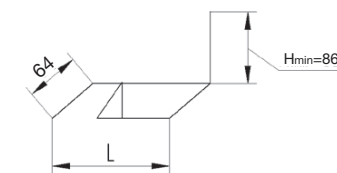

- L - 580 x 64
- L - 1140 x 64
- L - 1700 x 64
- L - 2260 x 64

