


# PROFI 60 WLX LED UP/DN

Wall mounted direct/indirect LED luminaire. Light source - Fortimo LED Line or PrevaLED Linear. Standard EVG ballast, Touch DALI version on request. Body is made of aluminium profile and available in all RAL colours.

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

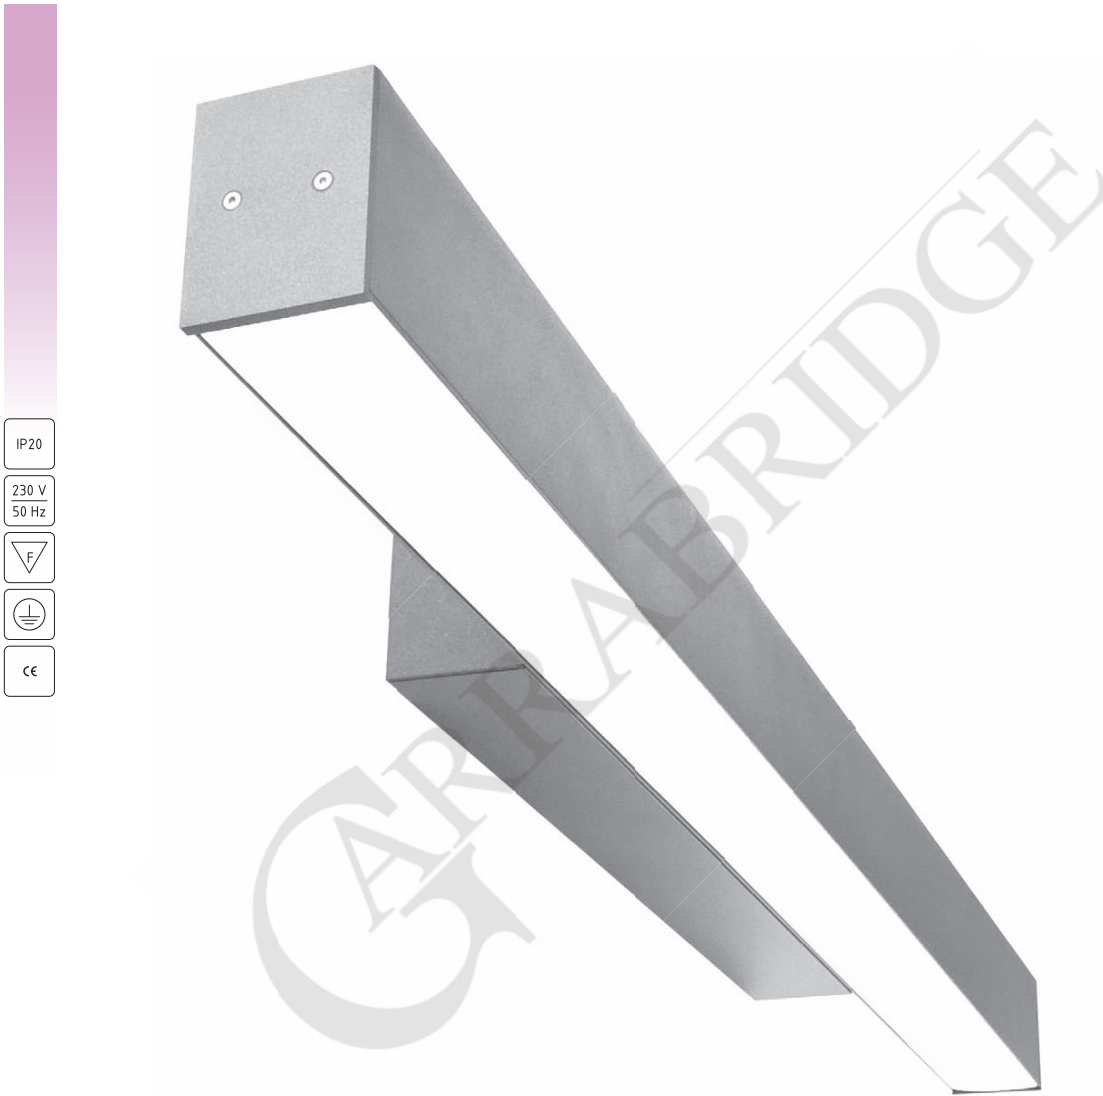

Index no.	Lumen output	Wattage	System efficacy	Colour temp.	Colour rendering index	Lifetime	Length	Weight
0000-003494.LL4400/830	4x1100 lm	4x9,1W	120 lm/W	3000K	80 Ra	50,000 h	671 mm	2,00 kg
0000-003494.LL4400/840	4x1100 lm	4x9,1W	120 lm/W	4000K	80 Ra	50,000 h	671 mm	2,00 kg
0000-003494.LL8800/830	8x1100 lm	8x9,1W	120 lm/W	3000K	80 Ra	50,000 h	1231 mm	3,00 kg
0000-003494.LL8800/840	8x1100 lm	8x9,1W	120 lm/W	4000K	80 Ra	50,000 h	1231 mm	3,00 kg

