

Recessed LED IP65 luminaire with opal diffuser designed for modular ceiling. Light source - Fortimo LED Line, PrevaLED Linear or Tridonic Stark LED module. Standard EVG ballast, Touch DALI version on request. Body is made of steel and aluminium and is available in all RAL colours. IP44 version for modular or gypsum ceiling on request. High quality, energy efficient white LED light with CRI 80. Perfect replacement for conventional T5 luminaires.




- IP65
- 230 V  
50 Hz
- F
- ⊕
- CE



Index no.	Lumen output	Wattage	System efficacy	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003509.LL3900/830	6x650 lm	6x5,1W	128 lm/W	3000K	80 Ra	50,000 h	6,50 kg
0000-003509.LL3900/840	6x650 lm	6x5,1W	128 lm/W	4000K	80 Ra	50,000 h	6,50 kg
0000-003509.ST5000/830	4x1250 lm	4x12W	106 lm/W	3000K	80 Ra	50,000 h	6,50 kg
0000-003509.ST5000/840	4x1250 lm	4x12W	106 lm/W	4000K	80 Ra	50,000 h	6,50 kg

580 x 580

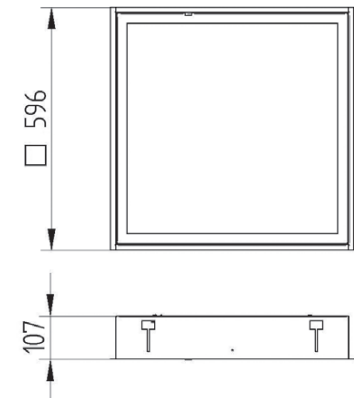

LL - Philips Fortimo LED LINE module  
 ST - Tridonic Stark LED module  
 PL - Osram PrevaLED Linear module