
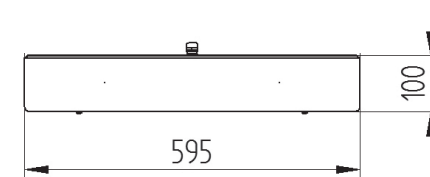


Surface mounted IP54 LED luminaire. Body is made of aluminium profile and it is available in all RAL colours. Light source - custom made LED plate - OSRAM Technology included. Standard EVG ballast, DALI version on request.

- IP54
- 230 V
50 Hz
- F
- ⊥
- CE



Index no.	Lumen output	Wattage	System efficacy	Colour temp.	Weight
0000-003388.21400/840	2x1400 lm	2x16W	87 lm/W	4000K	6,38 kg
0000-003388.22000/840	2x2000 lm	2x23W	87 lm/W	4000K	6,38 kg
0000-003388.22600/840	2x2600 lm	2x33W	79 lm/W	4000K	6,38 kg
0000-003388.21350/830	2x1350 lm	2x16W	84 lm/W	3000K	6,38 kg
0000-003388.21900/830	2x1900 lm	2x23W	83 lm/W	3000K	6,38 kg
0000-003388.22500/830	2x2500 lm	2x33W	76 lm/W	3000K	6,38 kg