

Recessed IP44 downlight with cross louver for compact fluorescent lamps. Body (standard zinc, painted black on request) and ring (standard white, other colours on request) are made of steel. Reflector made of aluminium.

Technical extras upon request:

1. Emergency supply
- battery pack 1/2/3h (please add EM1, EM2 or EM3 after index number)
2. Compensation or passive power (capacitor).
Please add COMPENSATION after index number.
3. Dimmable ballast EVG DIM (1-10 V).
Please add EVG DIM after index number.
4. Digital dimmable ballast (DALI).
Please add DALI after index number.

IP44

230 V
50 Hz


CE



Easy installation -
without tools.




DL220 DC Glass.



DL220 DC Opal.



Ø 200

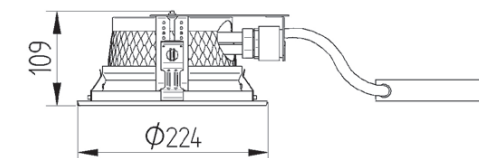

Index no.	Lamp	Weight	Socket
DL 220 DC Opal			
149.220.6482V	VVG, 1x13W TC-D	1,65 kg	G24d - 1
149.220.6482E	EVG, 1x13W TC-DEL	0,90 kg	G24q - 1
149.220.6480V	VVG, 1x18W TC-D	1,65 kg	G24d - 2
149.220.6480E	EVG, 1x18W TC-DEL	1,50 kg	G24d - 2
149.220.6492V	VVG, 2x13W TC-D	2,00 kg	G24d - 1
149.220.6492E	EVG, 2x13W TC-DEL	1,65 kg	G24q - 1
149.220.6490V	VVG, 2x18W TC-D	2,00 kg	G24d - 2
149.220.6490E	EVG, 2x18W TC-DEL	1,65 kg	G24d - 2

Index no.	Lamp	Weight	Socket
DL 220 DC Prisma			
150.220.6482V	VVG, 1x13W TC-D	1,65 kg	G24d - 1
150.220.6482E	EVG, 1x13W TC-DEL	0,90 kg	G24q - 1
150.220.6480V	VVG, 1x18W TC-D	1,65 kg	G24d - 2
150.220.6480E	EVG, 1x18W TC-DEL	1,50 kg	G24d - 2
150.220.6492V	VVG, 2x13W TC-D	2,00 kg	G24d - 1
150.220.6492E	EVG, 2x13W TC-DEL	1,65 kg	G24q - 1
150.220.6490V	VVG, 2x18W TC-D	2,00 kg	G24d - 2
150.220.6490E	EVG, 2x18W TC-DEL	1,65 kg	G24d - 2

Index no.	Lamp	Weight	Socket
DL 220 DC with glass			
148.220.6482V	VVG, 1x13W TC-D	1,65 kg	G24d - 1
148.220.6482E	EVG, 1x13W TC-DEL	0,90 kg	G24q - 1
148.220.6480V	VVG, 1x18W TC-D	1,65 kg	G24d - 2
148.220.6480E	EVG, 1x18W TC-DEL	1,50 kg	G24d - 2
148.220.6492V	VVG, 2x13W TC-D	2,00 kg	G24d - 1
148.220.6492E	EVG, 2x13W TC-DEL	1,65 kg	G24q - 1
148.220.6490V	VVG, 2x18W TC-D	2,00 kg	G24d - 2
148.220.6490E	EVG, 2x18W TC-DEL	1,65 kg	G24d - 2