


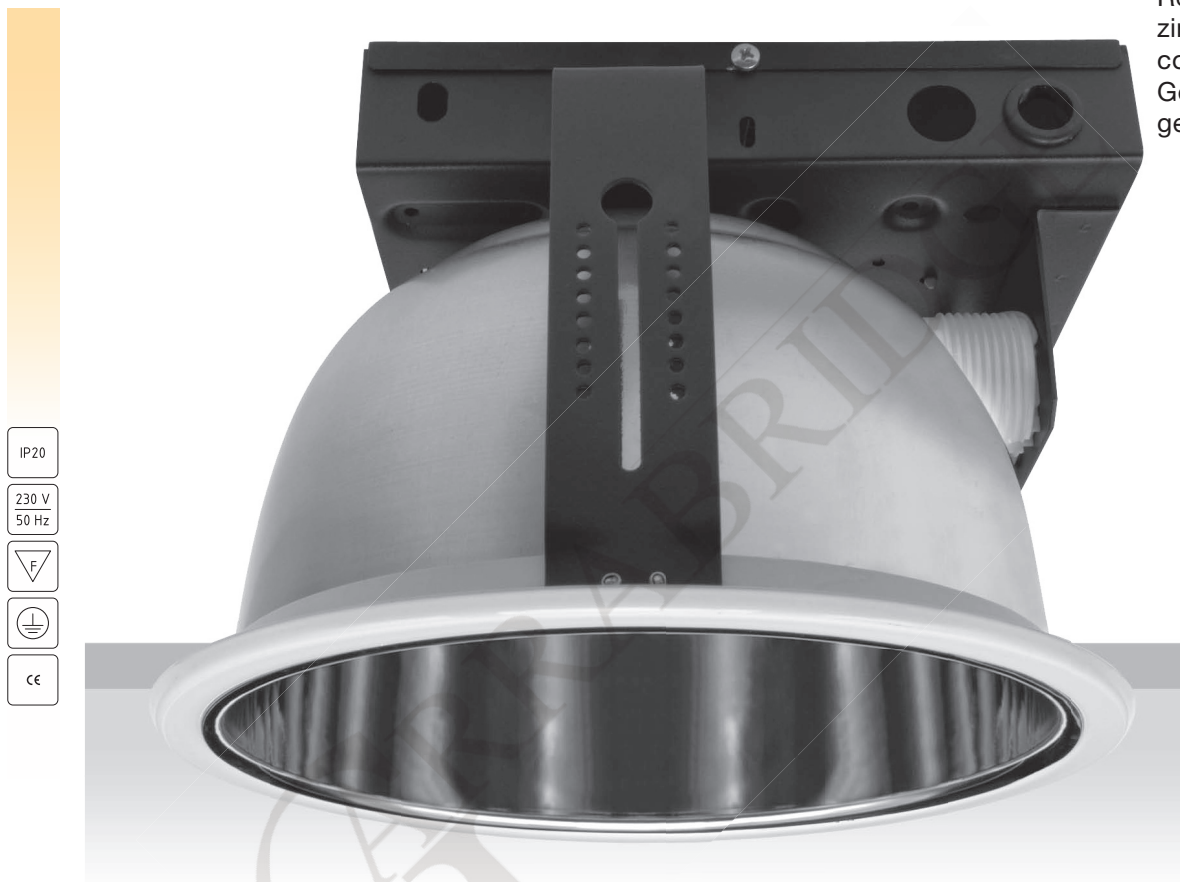

Recessed downlight for compact fluorescent lamps. Body (standard zinc, painted black on request) and ring (standard white, other colours on request) are made of steel. Reflector made of aluminium. Gearbox can be mounted on the top or remote on wire (for remote gearbox please add RGB after index number).


Technical extras upon request:

1. Emergency supply
- battery pack 1/2/3h (please add EM1, EM2 or EM3 after index number)
2. Compensation or passive power (capacitor).
Please add COMPENSATION after index number.
3. Dimmable ballast EVG DIM (1-10 V).
Please add EVG DIM after index number.
4. Digital dimmable ballast (DALI).
Please add DALI after index number.

All downlights are available with remote gearbox.
Please add RGB after index number.



Easy installation – without tools.



Diamond faceted reflector (F).



Mounting brackets.

Index no.	Lamp	Weight	Socket
F06.255.2266V	VVG, 1x18W TC-D	1,80 kg	G24d - 2
F06.255.2266E	EVG, 1x18W TC-DEL	1,65 kg	G24q - 2
F06.255.2267V	VVG, 1x26W TC-D	1,90 kg	G24d - 3
F06.255.2267E	EVG, 1x26W TC-DEL	1,65 kg	G24q - 3
F06.255.132E	EVG, 1x32W TC-TEL	1,65 kg	GX24q - 3
F06.255.142E	EVG, 1x42W TC-TEL	1,65 kg	GX24q - 4
F06.255.2268V	VVG, 2x18W TC-D	2,00 kg	G24d - 2
F06.255.2268E	EVG, 2x18W TC-DEL	1,70 kg	G24q - 2
F06.255.2269V	VVG, 2x26W TC-D	1,90 kg	G24d - 3
F06.255.2269E	EVG, 2x26W TC-DEL	1,80 kg	G24q - 3
F06.255.2270V	VVG, 3x26W TC-D	2,90 kg	G24d - 3
F06.255.2270E	EVG, 3x26W TC-DEL	2,30 kg	G24q - 3
F06.255.232E	EVG, 2x32W TC-TEL	2,00 kg	GX24q - 3
F06.255.242E	EVG, 2x42W TC-TEL	2,00 kg	GX24q - 4

With plain glossy reflector.

G06.255.2266V	VVG, 1x18W TC-D	1,80 kg	G24d - 2
G06.255.2266E	EVG, 1x18W TC-DEL	1,65 kg	G24q - 2
G06.255.2267V	VVG, 1x26W TC-D	1,90 kg	G24d - 3
G06.255.2267E	EVG, 1x26W TC-DEL	1,65 kg	G24q - 3
G06.255.132E	EVG, 1x32W TC-TEL	1,65 kg	GX24q - 3
G06.255.142E	EVG, 1x42W TC-TEL	1,65 kg	GX24q - 4
G06.255.2268V	VVG, 2x18W TC-D	2,00 kg	G24d - 2
G06.255.2268E	EVG, 2x18W TC-DEL	1,70 kg	G24q - 2
G06.255.2269V	VVG, 2x26W TC-D	1,90 kg	G24d - 3
G06.255.2269E	EVG, 2x26W TC-DEL	1,80 kg	G24q - 3
G06.255.2270V	VVG, 3x26W TC-D	2,90 kg	G24d - 3
G06.255.2270E	EVG, 3x26W TC-DEL	2,30 kg	G24q - 3
G06.255.232E	EVG, 2x32W TC-TEL	2,00 kg	GX24q - 3
G06.255.242E	EVG, 2x42W TC-TEL	2,00 kg	GX24q - 4

For decorative accessories see page 240

