



Recessed downlight for compact fluorescent lamps with flat IP44 glass. Body (standard zinc, painted black on request) is made of steel. Reflector made of aluminium.

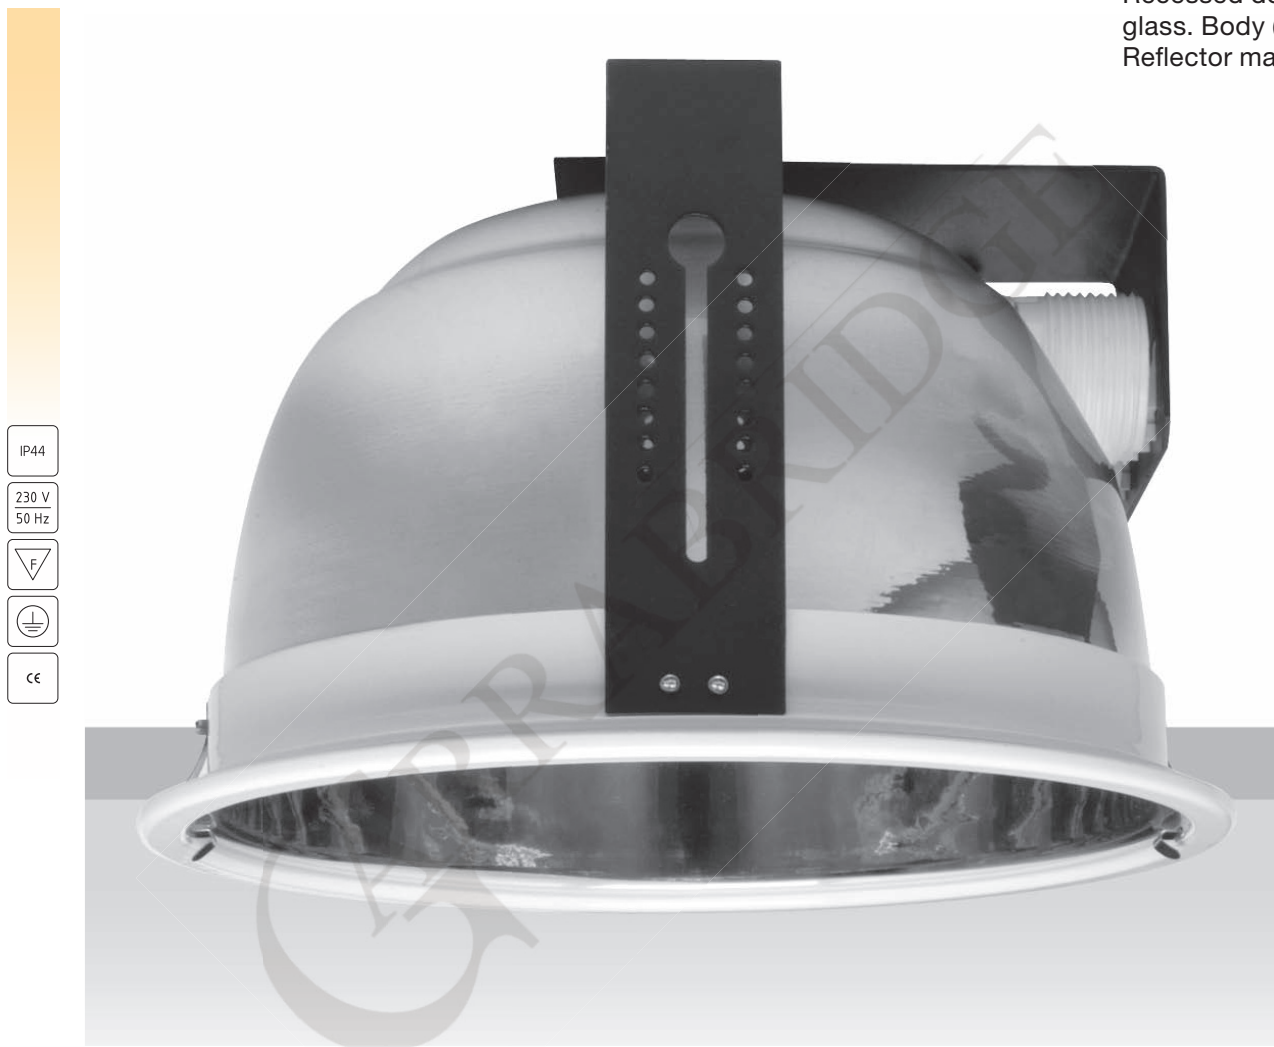


- IP44
- 230 V  
50 Hz
- F
- ⊕
- CE

Technical extras upon request:

1. Emergency supply  
- battery pack 1/2/3h (please add EM1, EM2 or EM3 after index number)
2. Compensation or passive power (capacitor).  
Please add COMPENSATION after index number.
3. Dimmable ballast EVG DIM (1-10 V).  
Please add EVG DIM after index number.
4. Digital dimmable ballast (DALI).  
Please add DALI after index number.



Easy installation – without tools.



Mounting brackets.



IP44 glass can be clear or matt.

Index no.	Lamp	Weight	Socket
274.255.2266V	VVG, 1x18W TC-D	2,05 kg	G24d - 2
274.255.2266E	EVG, 1x18W TC-DEL	1,90 kg	G24q - 2
274.255.2267V	VVG, 1x26W TC-D	2,15 kg	G24d - 3
274.255.2267E	EVG, 1x26W TC-DEL	1,90 kg	G24q - 3
274.255.2268V	VVG, 2x18W TC-D	2,25 kg	G24d - 2
274.255.2268E	EVG, 2x18W TC-DEL	1,95 kg	G24q - 2
274.255.2269V	VVG, 2x26W TC-D	2,45 kg	G24d - 3
274.255.2269E	EVG, 2x26W TC-DEL	1,95 kg	G24q - 3

