

Recessed downlight for compact fluorescent lamps. Body (standard zinc, painted black on request) and ring (standard white, other colours on request) are made of steel. Reflector made of aluminium.


Technical extras upon request:

1. Emergency supply
- battery pack 1/2/3h (please add EM1, EM2 or EM3 after index number)
2. Compensation or passive power (capacitor).
Please add COMPENSATION after index number.
3. Dimmable ballast EVG DIM (1-10 V).
Please add EVG DIM after index number.
4. Digital dimmable ballast (DALI).
Please add DALI after index number.

IP20

230 V
50 Hz

CE

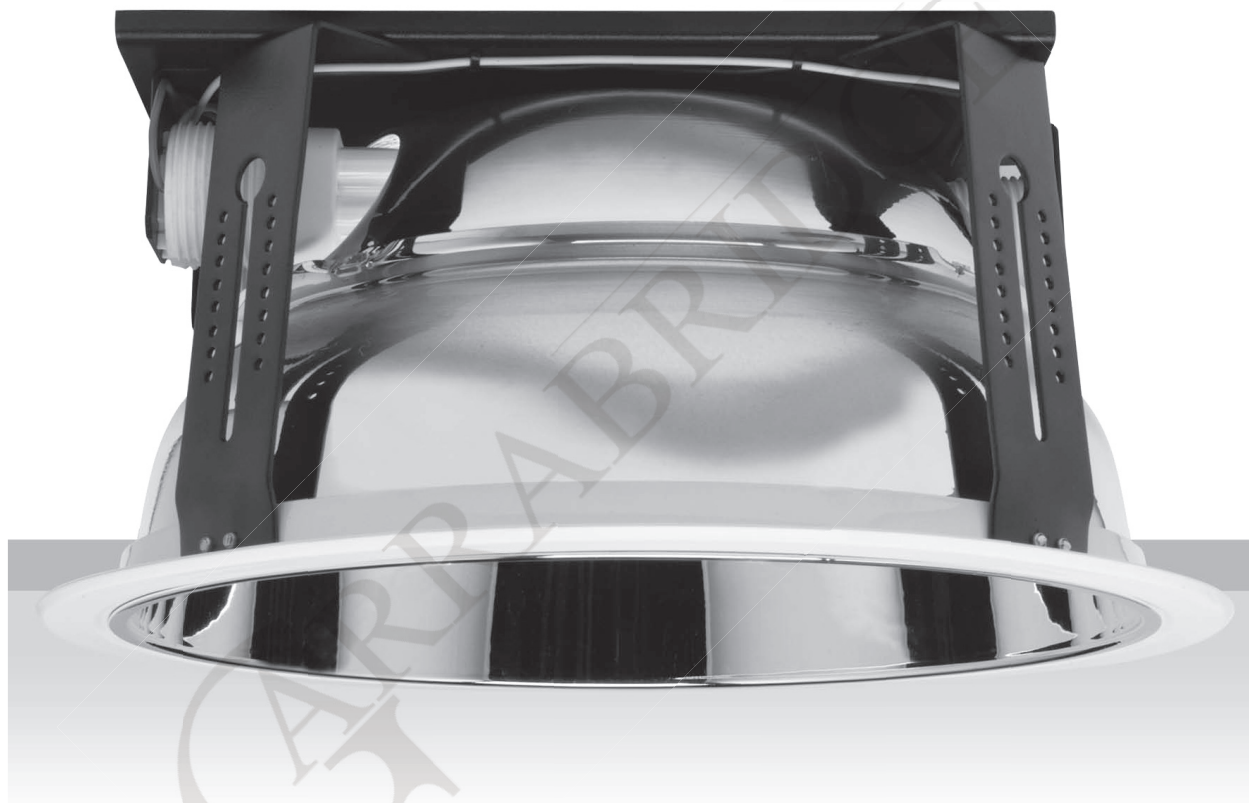

Easy installation –
without tools.



Mounting brackets.


All DL 315 downlights are in standard with remote gearbox.

Available decorative accessories:

- turbo louver (index 0011)
- decorative glass thickness 5 or 10 mm (index from 0025 to 0040)

| Index no. | Lamp | Weight | Socket |
|-------------|-------------------|---------|-----------|
| 07.315.232E | EVG, 2x32W TC-TEL | 3,10 kg | GX24q - 3 |
| 07.315.242E | EVG, 2x42W TC-TEL | 3,10 kg | GX24q - 4 |
| 07.315.326V | VVG, 3x26W TC-D | 4,50 kg | G24d - 3 |
| 07.315.326E | EVG, 3x26W TC-DEL | 3,50 kg | G24q - 3 |

For decorative accessories see page 240



Ø 295

