

Recessed square downlight for compact fluorescent lamps. Body (standard zinc, painted black on request) and ring (standard white, other colours on request) are made of steel.

Technical extras upon request:

1. Emergency supply  
- battery pack 1/2/3h (please add EM1, EM2 or EM3 after index number)
2. Compensation or passive power (capacitor).  
Please add COMPENSATION after index number.
3. Dimmable ballast EVG DIM (1-10 V).  
Please add EVG DIM after index number.
4. Digital dimmable ballast (DALI).  
Please add DALI after index number.

IP20

230 V  
50 Hz

CE


Available decorative accessories:

- IP20 decorative glass (clear or matt)
- IP44 decorative glass (clear or matt)


All downlights are available with remote gearbox. Please add RGB after index number

Index no.	Lamp	Weight	Socket
235.230.118V	VVG, 1x18W TC-D	1,90 kg	G24d - 2
235.230.118E	EVG, 1x18W TC-DEL	1,70 kg	G24q - 2
235.230.126V	VVG, 1x26W TC-D	1,90 kg	G24d - 3
235.230.126E	EVG, 1x26W TC-DEL	1,70 kg	G24q - 3
235.230.132E	EVG, 1x32W TC-D	1,70 kg	GX24d - 3
235.230.142E	EVG, 1x42W TC-DEL	1,70 kg	GX24q - 4
235.230.218V	VVG, 2x18W TC-D	1,90 kg	G24d - 2
235.230.218E	EVG, 2x18W TC-DEL	1,70 kg	G24q - 2
235.230.226V	VVG, 2x26W TC-D	1,90 kg	G24d - 3
235.230.226E	EVG, 2x26W TC-DEL	1,70 kg	G24q - 3

210 x 210

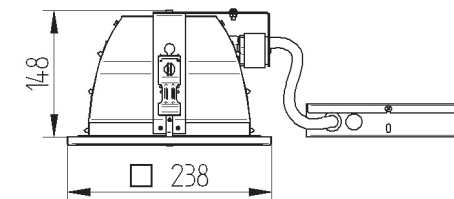

Easy installation - without tools.



Mounting brackets.