


Recessed square downlight for compact fluorescent lamps. Designed for indoor and outdoor use IP65. Body and frame are made of aluminium and can be painted in any RAL colour.

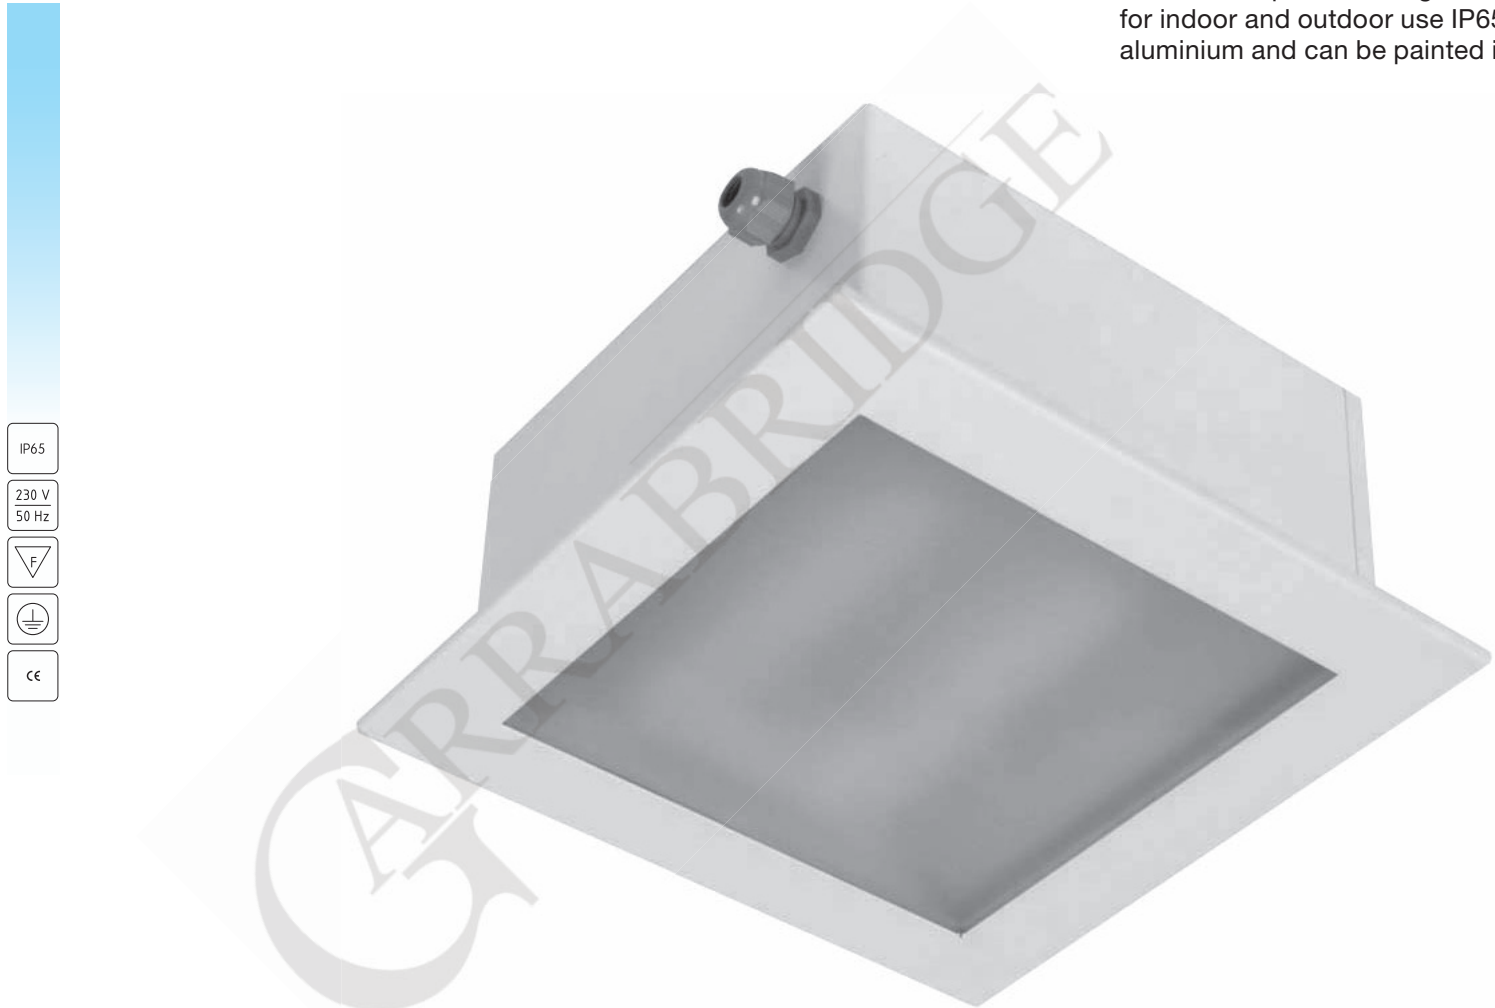

- IP65
- 230 V
50 Hz
- F
- ⊕
- CE

Technical extras upon request:

1. Emergency supply
- battery pack 1 /2 /3h.
Please add EM1, EM2 or EM3 after index number.
2. Compensation or passive power (capacitor).
Please add COMPENSATION after index number.
3. Dimmable ballast EVG DIM (1-10 V).
Please add EVG DIM after index number.
4. Digital dimmable ballast (DALI).
Please add DALI after index number.



Index no.	Lamp	Weight	Socket
206.255.218V	VVG, 2x18W TC-D	3,60 kg	G24d - 2
206.255.218E	EVG, 2x18W TC-DEL	3,60 kg	G24q - 2
206.255.226V	VVG, 2x26W TC-D	3,60 kg	G24d - 3
206.255.226E	EVG, 2x26W TC-DEL	3,60 kg	G24q - 3

