

# LED 220




Recessed IP44 LED downlights.  
 Body is made of steel and aluminium and it is available in all RAL colours.  
 Light source - Philips Fortimo LED DLM module.  
 Standard EVG ballast, Touch DALI version on request (please add TD after index number).  
 This LED downlight is also available with 3 hour emergency unit.

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for CFL downlights in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

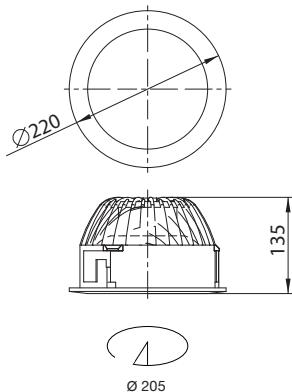

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-004576.1100/830	1100 lm	14 W	3000 K	80 Ra	50,000 h	1,10 kg
0000-004576.1100/840	1100 lm	12 W	4000 K	80 Ra	50,000 h	1,10 kg
0000-004576.2000/830	2000 lm	24 W	3000 K	80 Ra	50,000 h	1,10 kg
0000-004576.2000/840	2000 lm	22 W	4000 K	80 Ra	50,000 h	1,10 kg
0000-004576.3000/830	3000 lm	37 W	3000 K	80 Ra	50,000 h	1,10 kg
0000-004576.3000/840	3000 lm	34 W	4000 K	80 Ra	50,000 h	1,10 kg

