

LWN 600 LED 2PL




Recessed LED luminaire with parabolic louvers designed for modular or gypsum ceiling. Light source - Fortimo LED Line or PrevaLED Linear. Standard EVG ballast, Touch DALI version on request. Body is made of steel and aluminium and is available in all RAL colours. Version for gypsum ceiling on request.

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

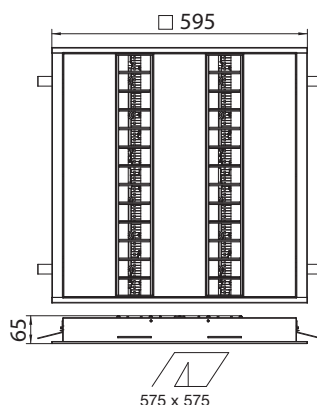

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003986.LL22200/830	2x2200 lm	32 W	3000 K	80 Ra	50,000 h	3,30 kg
0000-003986.LL22200/840	2x2200 lm	32 W	4000 K	80 Ra	50,000 h	3,30 kg

IP20 230 V 50 Hz

F

CE

PREVALED