

**ALBO LEDIZ®**  
**M600X600 4 3100/840 DPB DS**



IP65

IK08

220-240V  
50/60Hz



850°



M600

OPTIONS

DIM  
1-10V

DIM  
DALI

PLUG  
&  
PLAY


M625




	a	b	h	h'
ALBO LEDIZ® M600x600	596	596	75	103

### IP65 clean-room LED recessed.

- Mounting: lay-in (LI) recessed in modular false ceilings, or lay-out (LO) into plasterboard ceilings or ceilings with concealed profiles
- using brackets (included) for height 15 to 45 or 45 to 75 mm; connection through waterproof stuffing box
- Lighting source: embedded LED modules featuring LEDIZ®, an exclusive and patented technology by Dietal
- Electrical equipment: LED DRIVE® driver (dimming on request)
- Housing: steel sheet, white powder coated finish
- Optical system: double-parabolic louvre made of bright aluminum (satin aluminum on request) + high-resistance tempered glass screwed in the body, thickness 6 mm; internal compression gasket made of white EPDM ensuring sealing

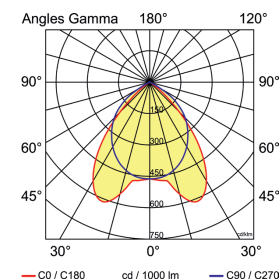

**ALBO LEDIZ®**  
**M600X600 4 3100/840 DPB DS**

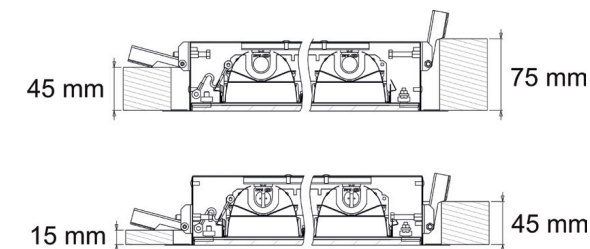

DESIGNATION	Nb sources	lm output	W system	lm/w	CCT	CRI	CRI R9	Optic.	Cl. UTE	UGR	Ta (min/max)
ALBO LEDIZ® M600x600 4 2900/830 DPB DS LI	4	3200 lm	52W	62 lm/W	3000 K	> 80	> 25	DPB DS	B	< 19	+10°C / +35°C
ALBO LEDIZ® M600x600 4 3100/840 DPB DS LI	4	3400 lm	52W	66 lm/W	4000 K	> 80	> 25	DPB DS	B	< 19	+10°C / +35°C
ALBO LEDIZ® M600x600 4 2900/830 DPB DS LO-15/45	4	3200 lm	52W	62 lm/W	3000 K	> 80	> 25	DPB DS	B	< 19	+10°C / +35°C
ALBO LEDIZ® M600x600 4 3100/840 DPB DS LO-15/45	4	3400 lm	52W	66 lm/W	4000 K	> 80	> 25	DPB DS	B	< 19	+10°C / +35°C
ALBO LEDIZ® M600x600 4 2900/830 DPB DS LO-45/75	4	3200 lm	52W	62 lm/W	3000 K	> 80	> 25	DPB DS	B	< 19	+10°C / +35°C
ALBO LEDIZ® M600x600 4 3100/840 DPB DS LO-45/75	4	3400 lm	52W	66 lm/W	4000 K	> 80	> 25	DPB DS	B	< 19	+10°C / +35°C