

**INDIGO LEDIZ®**  
**M600X600 2 2200/840 DEFL/FL**



Indirect LED recessed luminaire.

- Mounting: lay-in (LI) recessed in modular false ceilings, or lay-out (LO) into plasterboard ceilings or ceilings with concealed profiles using brackets (to be ordered separately)
- Lighting source: embedded LED modules featuring LEDIZ®, an exclusive and patented technology by Dietal
- Electrical equipment: LED DRIVE® driver (dimming on request)
- Housing: steel sheet, white powder coated finish
- Optical system: deflector made of micro-perforated steel sheet + FLEXI LENSE® diffusing film



IP20

IK07

220-240V  
50/60Hz



650°



RoHS

M600


OPTIONS

DIM  
1-10V


DIM  
DALI



M625

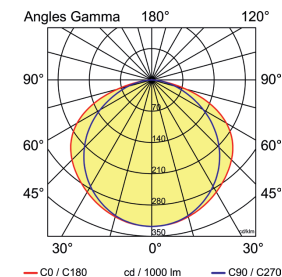

**INDIGO LEDIZ®**  
**M600X600 2 2200/840 DEFL/FL**

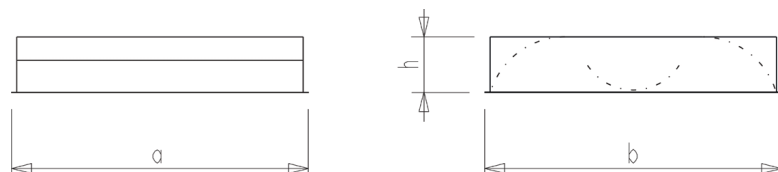

	a	b	h
INDIGO LEDIZ® M600x600	596	596	111

DESIGNATION	Nb sources	Im <sub>output</sub>	W <sub>system</sub>	Im/W	CCT	CRI	CRI <sub>RB</sub>	Optic.	Cl. UTE	Ta (min/max)
INDIGO LEDIZ® M600x600 2 2100/830 DEFL/FL	2	2100 lm	44W	48 lm/W	3000 K	> 80	> 15	DEFL/FL	E	+10°C / +35°C
INDIGO LEDIZ® M600x600 2 2200/840 DEFL/FL	2	2200 lm	44W	50 lm/W	4000 K	> 80	> 25	DEFL/FL	E	+10°C / +35°C