


Multipurpose LED surface mounted

- Mounting: surface mounted or suspended (suspension kit to be ordered separately)
- Lighting source: embedded led modules featuring LEDIZ®, an exclusive and patented technology by Diatal
- Electrical equipment: LED DRIVE® driver (dimming on request)
- Housing: steel sheet, white powder coated finish (grey color on request); customizable ABS end-caps (commercial mark/brand inlay on request)
- Optical system: double-parabolic louvre made of bright aluminum (satin aluminum on request)

**KLINO LEDIZ®
L1200 2 3900/840 DPB**

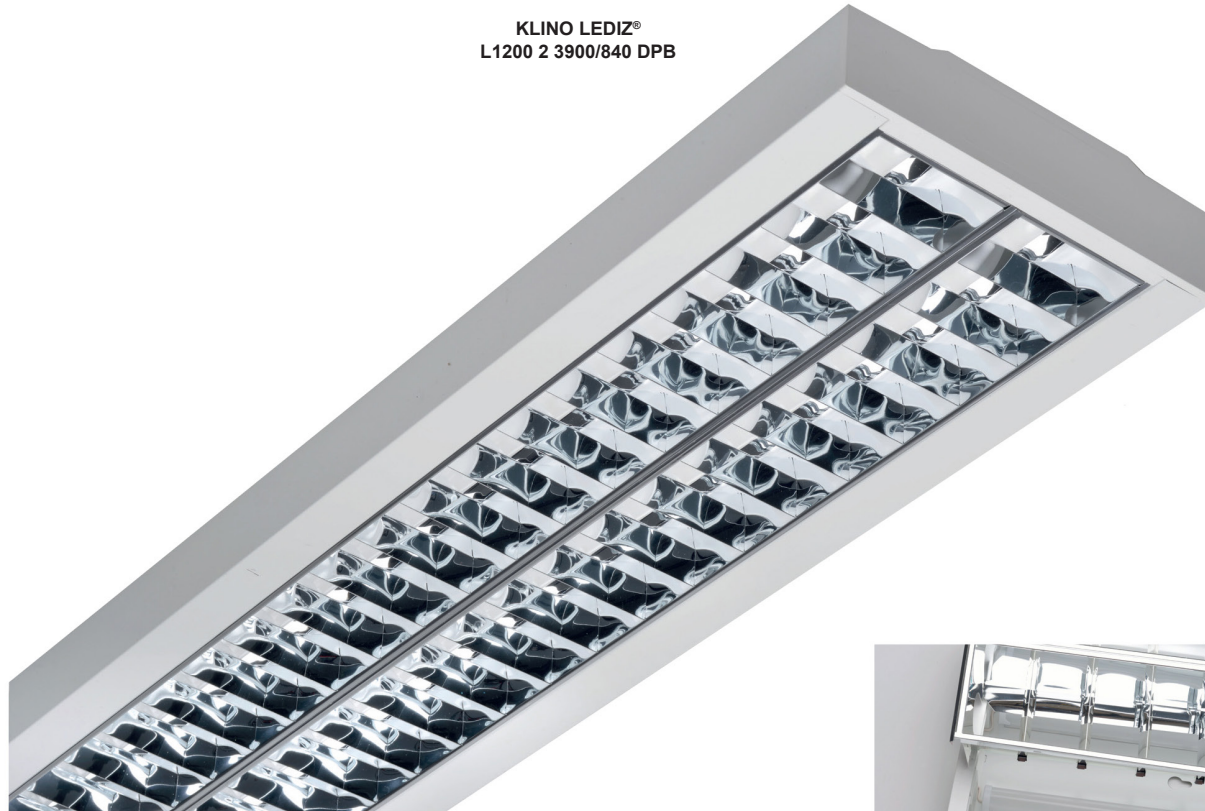


**KLINO LEDIZ®
L1200 2 3900/840 DPB**

- LED
- IP20
- IK07
- 220-240V
50/60Hz
- CL I
- 650°
- CE
- RoHS

OPTIONS

- DIM 1-10V
- DIM DALI
- Icon of person and light
- Icon of person and light with arrow
- RAL 9006

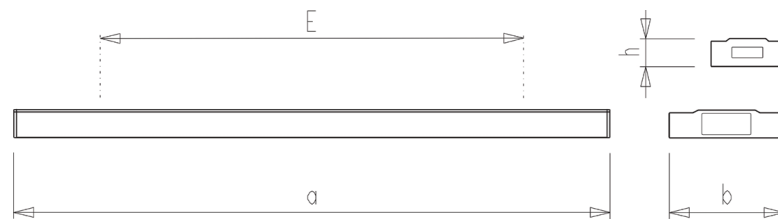

	a	b	h	E
KLINO LEDIZ® L1200 1	1195	146	58	850
KLINO LEDIZ® L1200 2	1195	230	58	850

DESIGNATION	Nb sources	Im output	W system	lm/W	CCT	CRI	CRI R9	Optic.	CL UTE	UGR	Ta (min/max)
KLINO LEDIZ® L1200 1 1900/830 DPB	1	1900 lm	25W	76 lm/W	3000 K	> 80	> 15	DPB	B	< 19	+10°C / +40°C
KLINO LEDIZ® L1200 1 2000/840 DPB	1	2000 lm	25W	80 lm/W	4000 K	> 80	> 24	DPB	B	< 19	+10°C / +40°C
KLINO LEDIZ® L1200 2 3700/830 DPB	2	3700 lm	47W	79 lm/W	3000 K	> 80	> 15	DPB	B	< 19	+10°C / +40°C
KLINO LEDIZ® L1200 2 3900/840 DPB	2	3900 lm	47W	83 lm/W	4000 K	> 80	> 24	DPB	B	< 19	+10°C / +40°C