

KLINO-S LEDIZ®
L1200 2 3600/840 DPB-HR



IP20

IK07


220-240V
50/60Hz



650°




OPTIONS

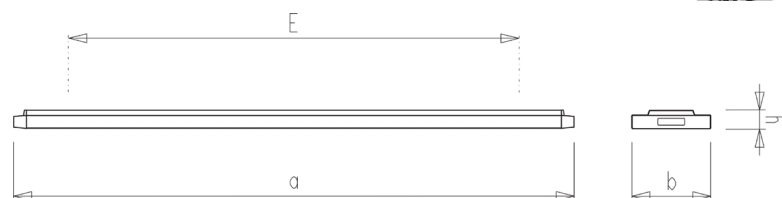

	a	b	h	E
KLINO-S LEDIZ® L1200 2	1245	175	40	1000
KLINO-S LEDIZ® L1500 2	1545	175	40	1300

Ultra slim high-end LED surface mounted

- Mounting: surface mounted or suspended (suspension kit to be ordered separately)
- Lighting source: embedded led modules featuring LEDIZ®, an exclusive and patented technology by Dietal
- Electrical equipment: LED DRIVE® driver (dimming on request)
- Housing: steel sheet, white powder coated finish (grey color on request); customizable ABS end-caps (commercial mark/brand inlay on request)
- Optical system: double-parabolic micro-optics OPTIMA® made of bright aluminum with high reflection coefficient (satin aluminum on request)



KLINO-S LEDIZ®
L1200 2 3600/840 DPB-HR

DESIGNATION	Nb sources	lm output	W system	lm/w	CCT	CRI	CRI R9	Optic.	CL UTE	UGR	Ta (min/max)
KLINO-S LEDIZ® L1200 2 3400/830 DPB-HR	2	3400 lm	50W	68 lm/w	3000 K	> 80	> 15	DPB-HR	B	< 19	+10°C / +40°C
KLINO-S LEDIZ® L1200 2 3600/840 DPB-HR	2	3600 lm	50W	72 lm/w	4000 K	> 80	> 24	DPB-HR	B	< 19	+10°C / +40°C
KLINO-S LEDIZ® L1500 2 4300/830 DPB-HR	2	4300 lm	63W	69 lm/w	3000 K	> 80	> 15	DPB-HR	B	< 19	+10°C / +40°C
KLINO-S LEDIZ® L1500 2 4500/840 DPB-HR	2	4500 lm	63W	72 lm/w	4000 K	> 80	> 24	DPB-HR	B	< 19	+10°C / +40°C