


LED batten.

- Mounting: surface or wall-mounted
- Lighting source: embedded LED modules featuring LEDIZ®, an exclusive and patented technology by Diatal
- Electrical equipment: LED DRIVE® driver (dimming on request)
- Housing: white lacquered steel sheet; end-caps made of steel sheet
- Optical system: -




**MIRO LEDIZ®
L1200 1 2700/840**

- LED
- IP20
- IK03
- 220-240V
50/60Hz
- CL I
- 650°
- CE
- RoHS



OPTIONS

- DIM DALI

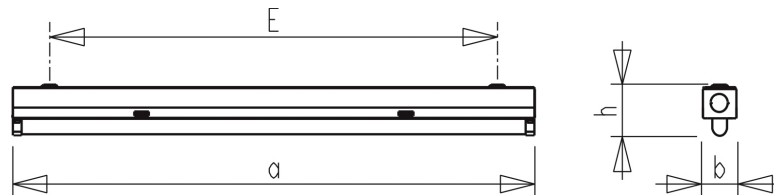

	a	b	h
MIRO LEDIZ® L600 1	592	40	60
MIRO LEDIZ® L900 1	874	40	60
MIRO LEDIZ® L1200 1	1167	40	60
MIRO LEDIZ® L1500 1	1452	40	60

DESIGNATION	Nb sources	lm _{output}	W _{system}	lm/W	CCT	CRI	CRI _{R9}	Ta (min/max)
MIRO LEDIZ® L600 1 1400/830	1	1400 lm	13W	108 lm/W	3000 K	> 80	> 15	+10°C / +40°C
MIRO LEDIZ® L600 1 1400/840	1	1400 lm	13W	108 lm/W	4000 K	> 80	> 25	+10°C / +40°C
MIRO LEDIZ® L900 1 1900/830	1	1900 lm	20W	95 lm/W	3000 K	> 80	> 15	+10°C / +40°C
MIRO LEDIZ® L900 1 2000/840	1	2000 lm	20W	100 lm/W	4000 K	> 80	> 25	+10°C / +40°C
MIRO LEDIZ® L1200 1 2600/830	1	2600 lm	26W	100 lm/W	3000 K	> 80	> 15	+10°C / +40°C
MIRO LEDIZ® L1200 1 2700/840	1	2700 lm	26W	104 lm/W	4000 K	> 80	> 25	+10°C / +40°C
MIRO LEDIZ® L1200 1 3500/830	1	3500 lm	37W	95 lm/W	3000 K	> 80	> 15	+10°C / +35°C
MIRO LEDIZ® L1200 1 3600/840	1	3600 lm	37W	98 lm/W	4000 K	> 80	> 25	+10°C / +35°C
MIRO LEDIZ® L1500 1 3200/830	1	3200 lm	33W	97 lm/W	3000 K	> 80	> 15	+10°C / +40°C
MIRO LEDIZ® L1500 1 3300/840	1	3300 lm	33W	100 lm/W	4000 K	> 80	> 25	+10°C / +40°C
MIRO LEDIZ® L1500 1 4100/830	1	4100 lm	44W	94 lm/W	3000 K	> 80	> 15	+10°C / +35°C
MIRO LEDIZ® L1500 1 4300/840	1	4300 lm	44W	98 lm/W	4000 K	> 80	> 25	+10°C / +35°C