


OPTIMO LEDIZ®
M600X600 3 3100/840 DPB-HR



Ultra slim high-end LED recessed.

- Mounting: lay-in (LI) recessed; fast connection with LINECT® connector
- Lighting source: embedded led modules featuring LEDIZ®, an exclusive and patented technology by Diatal
- Electrical equipment: LED DRIVE® driver (dimming on request)
- Housing: steel sheet, white powder coated finish
- Optical system: double-parabolic micro-optics OPTIMA® made of bright aluminum with high reflection coefficient (satin aluminum on request)

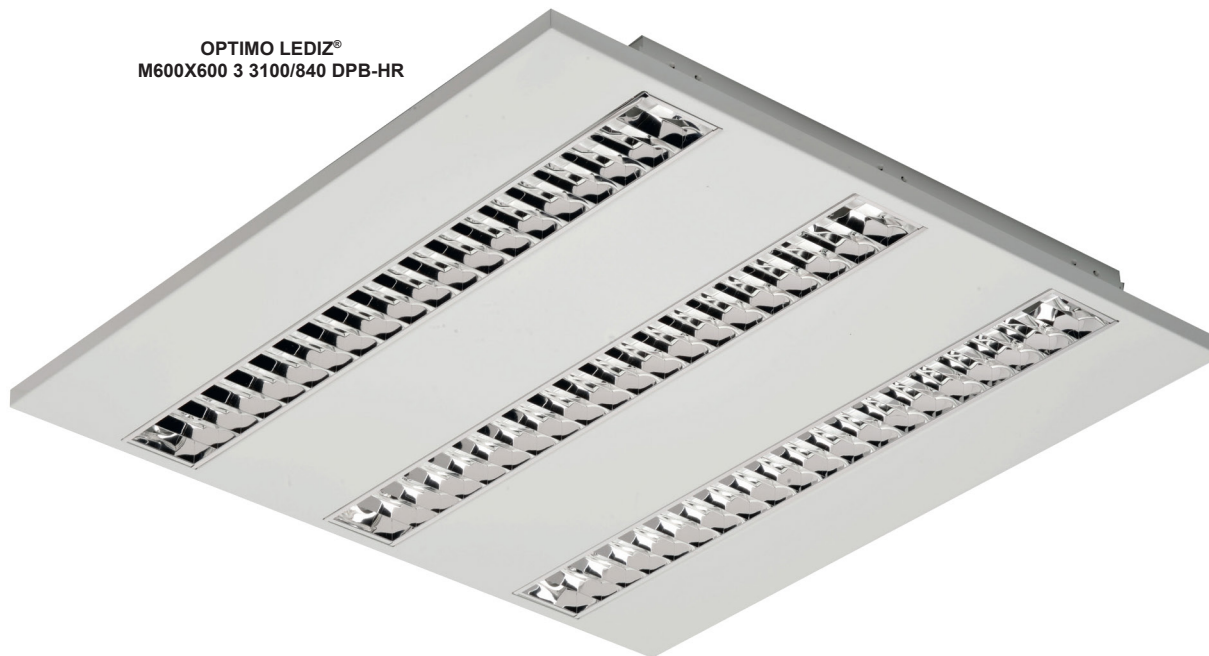

IP20

IK07

220-240V
50/60Hz




650°



RoHS

M600



OPTIMO LEDIZ®
M600X600 4 4100/840 DPB-HR

OPTIONS

DIM
1-10V



DIM
DALI



PLUG
&
PLAY

M625

M675

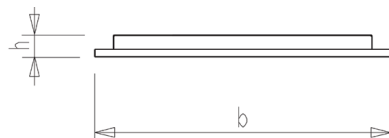

	a	b	h
OPTIMO LEDIZ® M600x600	596	596	44

DESIGNATION	Nb sources	Im _{output}	W _{system}	lm/W	CCT	CRI	CRI R9	Optic.	LOR	CL UTE	UGR	Ta (min/max)
OPTIMO LEDIZ® M600x600 3 2900/830 DPB-HR	3	2900 lm	35W	83 lm/W	3000 K	> 80	> 15	DPB-HR	> 0,90	B	< 19	+10°C / +40°C
OPTIMO LEDIZ® M600x600 3 3100/840 DPB-HR	3	3100 lm	35W	89 lm/W	4000 K	> 80	> 25	DPB-HR	> 0,90	B	< 19	+10°C / +40°C
OPTIMO LEDIZ® M600x600 4 3900/830 DPB-HR	4	3900 lm	46W	85 lm/W	3000 K	> 80	> 15	DPB-HR	> 0,90	B	< 19	+10°C / +40°C
OPTIMO LEDIZ® M600x600 4 4100/840 DPB-HR	4	4100 lm	46W	90 lm/W	4000 K	> 80	> 25	DPB-HR	> 0,90	B	< 19	+10°C / +40°C