

SOLO LEDIZ®
M600X600 3 3100/840 DPB-HR



Direct/indirect LED recessed luminaire.

- Mounting: lay-in (LI) recessed in modular false ceilings, or lay-out (LO) into plasterboard ceilings or ceilings with concealed profiles using brackets (to be ordered separately)
- Lighting source: embedded LED modules featuring LEDIZ®, an exclusive and patented technology by Diatal
- Electrical equipment: LED DRIVE® driver (dimming on request)
- Housing: steel sheet, white powder coated finish
- Optical system: double-parabolic louvre made of bright aluminum (satin aluminum on request); lateral deflectors made of micro-perforated steel sheet



IP20

IK07

220-240V
50/60Hz



650°



RoHS

M600



OPTIONS

DIM
1-10V

DIM
DALI



M625

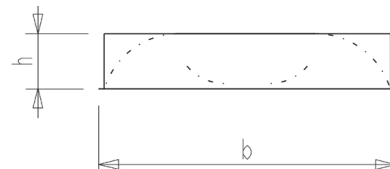

	a	b	h
SOLO LEDIZ® M600x600	596	596	116

SOLO LEDIZ®
M600X600 3 3100/840 DPB-HR

DESIGNATION	Nb sources	Im output	W system	lm/W	CCT	CRI	CRI R9	Optic.	Cl. UTE	UGR	Ta (min/max)
SOLO LEDIZ® M600x600 3 2900/830 DPB-HR	3	2900 lm	43W	68 lm/W	3000 K	> 80	> 15	DPB-HR	E	< 19	+10°C / +35°C
SOLO LEDIZ® M600x600 3 3100/840 DPB-HR	3	3100 lm	43W	73 lm/W	4000 K	> 80	> 24	DPB-HR	E	< 19	+10°C / +35°C