

# GARDALE RANGE

## VANDAL RESISTANT RANGE

Robust surface & recess mounted enclosed luminaire with texture white paint finish. Regressed Bezel fully gasketed to IP65 with a captive Polycarbonate panel. Recess version supplied with 4 No Adjustable Side Arm Mounting Brackets. Bezel/Diffuser removes without disturbing anti pick mastic. LED & long life fluorescent options.

- IP65 - IK10 ++
- Fabricated Fully Welded Steel Body
- Optional VANDACOAT offering enhanced Corrosion/Vandal & Graffiti Resistant Coating System
- Regressed Gasketed Bezel, Captive Polycarbonate Diffuser
- Stainless Steel Torx Security Screw Fixing
- Removable High Frequency Gear Tray
- 4 x Adjustable Side Arm Recess Mount Brackets
- Other RAL colour options
- Microwave Motion Detection option
- Longlife 50,000 hrs Fluorescent options
- LED Option


### Applications:

Prison Circulation Areas, Under Canopy, Corridors, Psychiatric Centres, Sub Way, Car Park, etc.



Recessed

Surface

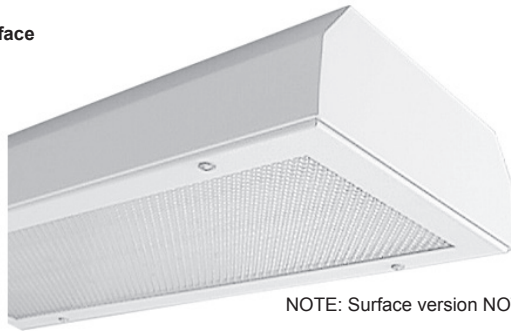

NOTE: Surface version NOT Anti Ligature



### RANGE AVAILABLE

Index No.	Description	Length	Weight
GARD114	1x14W HF T5	2ft / 660mm	7,0 kg
GARD124	1x24W HF T5	2ft / 660mm	7,0 kg
GARD128	1x28W HF T5	4ft / 1260mm	10,5 kg
GARD154	1x54W HF T5	4ft / 1260mm	10,5 kg
GARD135	1x35W HF T5	5ft / 1560mm	12,0 kg
GARD149	1x49W HF T5	5ft / 1560mm	12,0 kg
GARD214	2x14W HF T5	2ft / 660mm	7,0 kg
GARD224	2x24W HF T5	2ft / 660mm	7,0 kg
GARD228	2x28W HF T5	4ft / 1260mm	10,5 kg
GARD254	2x54W HF T5	4ft / 1260mm	10,5 kg
GARD235	2x35W HF T5	5ft / 1560mm	12,0 kg
GARD249	2x49W HF T5	5ft / 1560mm	12,0 kg


### Suffix

/RM	Recess Mounted Version
/SM	Surface Mounted Version
/P	Prismatic Controller
/O	Opal Diffuser
/HMB	High Frequency Dimmable
/EM3	3 Hour Maintained Emergency
/NL	Night Light
/SD	Security Key
/M-Wave	Microwave Motion Detection option
/LIFE	Long Life Fluorescent option
/VCOTE	VANDACOAT Enhanced External Coating System

### LED VERSIONS

Wattage p/mtr	No LED's	Voltage	Lms	Weight
Compromising of 10 qty x 100mm sections of 2.3W				
GARD23wLED	60	24V/240V	2100 per lampway	8,0 kg
Various T5/T8 type LED Tubes on request				
Available in colour temp 3000/4000/5000K				

\*Stainless Steel version available for special applications

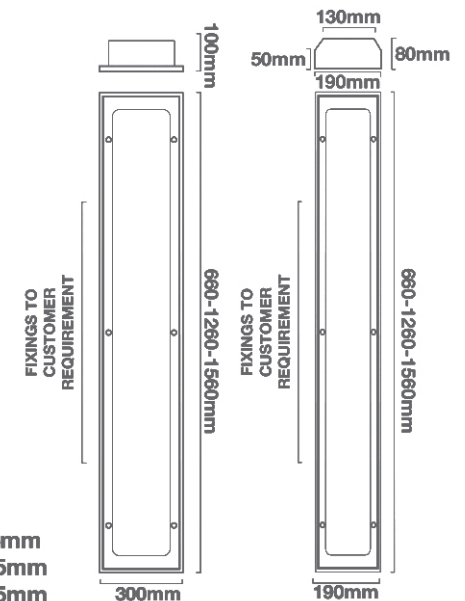

**Cut out Dimensions**  
 2ft - (L) 675mm x (W) 275mm  
 4ft - (L) 1275mm x (W) 275mm  
 6ft - (L) 1575mm x (W) 275mm