

Attractive recessed robust 'Anti Ligature' sealed luminaire with 3 or 4 No Torx security screw fixing. Two body size options available, small & large. Internal adjustable side arm suspension brackets. Polycarbonate dish (large body only) & flat panel options, diffuser panel removes without disturbing anti pick mastic for ease of maintenance. LED or Longlife fluorescent options.



- IP44/65 - IK10 ++
- Two Body Size Options: Small Ø260mm / Large Ø330mm
- Alloy Body and Polycarbonate Diffuser
- Clear Prismatic or Opal Dish Polycarbonate Diffuser (Large version only which removes without disturbing Anti Pick mastic)
- Flat Polycarbonate Panel options (Both Versions - which removes without disturbing Anti Pick mastic)
- Torx Security Stainless Steel Fixing
- Removable High Frequency Gear Tray
- Longlife 50,000 hrs Fluorescent options
- LED Option

Applications:

Psychiatric Hospitals, Secure Units Areas, Schools, Toilets, Corridors, Public Buildings, Lobbies, etc.



RANGE AVAILABLE



Index No.	Description	Weight
RFXR(S)282D	1x28W 2D	4,0 kg
RFXR(S)382D	1x38W 2D	4,0 kg
RFXR(S)218w	2x18W TCDE	4,0 kg
RFXR(S)226w	2x18W TCDE	4,0 kg

Suffix

/RFXR(S)	Small 260 diameter body (Flat Panel only)
/RFXR	Standard 330 diameter body
/HFD	High Frequency Dimmable
/DP	Prismatic Dish Diffuser (360 body only)
/DO	Opal Dish Diffuser (360 body only)
/DF	Frosted Dish Diffuser (360 body only)
/EM3	Integral 3 hour Emergency
/FL	Flat Panel (both body sizes)
/NL	7W Night Light
/EM3	Integral Maintained Emergency
/IP65	IP65 Gasket (optional)
/LIFE	Long Life Fluorescent option

LED VERSIONS

Wattage p/mtr	No LED's	mA	Lms	Weight
RFXR(S)18wLED	60	500	1500	4 kg
RFXR(S)23wLED	60	700	2100	4 kg
RFXR(S)26wLED	72	700	2500	4 kg

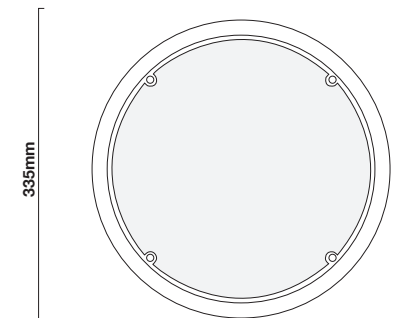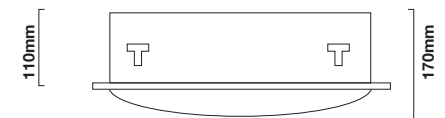

Cut out Ø 270mm