



Modular LED suspended luminaire.



OPTIONS

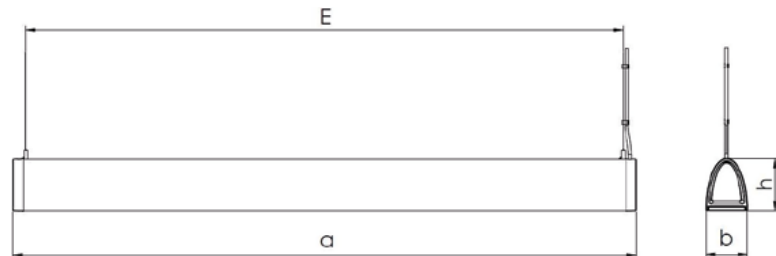

	a	b	h	E
COBRA L1200	1210	80	100	1160
COBRA L1500	1510	80	100	1460



COBRA
L1200 1 2500/840 DPB-HR

- Mounting: suspended (suspension kit to be ordered separately); in-line (LC) mounting possible using internal junction fishplates + automatic connector
- Lighting source: built-in LED modules featuring LEDIZ®, an exclusive and patented technology
- Electrical equipment: LED driver (dimming on request)
- Housing: extruded aluminum profile thickness 1,5 mm, white RAL 9016 textured - powder coated finish (Graphite black RAL 9011 or other colors on request); customizable ABS end-caps (color inserts and commercial mark/brand inlay on request)
- Optical system: double-parabolic micro-optics OPTIMA® made of bright aluminum with high reflection coefficient (satin aluminum on request); version with opal diffuser colourLED® (OP)

DESIGNATION	# modules	lm output	W system	lm/W	CCT	Ra	Optic.	UGR < 19	Ta (min/max)
COBRA L1200 1 2400/830 DPB-HR	1	2400 lm	25 W	96 lm/W	3000 K	> 80	DPB-HR	●	+10°C / +40°C
COBRA L1200 1 2500/840 DPB-HR	1	2500 lm	25 W	100 lm/W	4000 K	> 80	DPB-HR	●	+10°C / +40°C
COBRA L1200 1 3800/830 DPB-HR	1	3800 lm	41 W	93 lm/W	3000 K	> 80	DPB-HR	●	+10°C / +40°C
COBRA L1200 1 4000/840 DPB-HR	1	4000 lm	41 W	98 lm/W	4000 K	> 80	DPB-HR	●	+10°C / +40°C
COBRA L1500 1 2900/830 DPB-HR	1	2900 lm	31 W	94 lm/W	3000 K	> 80	DPB-HR	●	+10°C / +40°C
COBRA L1500 1 3100/840 DPB-HR	1	3100 lm	31 W	100 lm/W	4000 K	> 80	DPB-HR	●	+10°C / +40°C
COBRA L1500 1 3800/830 DPB-HR	1	3800 lm	41 W	93 lm/W	3000 K	> 80	DPB-HR	●	+10°C / +40°C
COBRA L1500 1 4000/840 DPB-HR	1	4000 lm	41 W	98 lm/W	4000 K	> 80	DPB-HR	●	+10°C / +40°C
COBRA L1500 1 5700/830 DPB-HR	1	5700 lm	62 W	92 lm/W	3000 K	> 80	DPB-HR	●	+10°C / +40°C
COBRA L1500 1 6000/840 DPB-HR	1	6000 lm	62 W	97 lm/W	4000 K	> 80	DPB-HR	●	+10°C / +40°C
COBRA L1200 1 2100/830 OP	1	2100 lm	25 W	84 lm/W	3000 K	> 80	OP	—	+10°C / +40°C
COBRA L1200 1 2200/840 OP	1	2200 lm	25 W	88 lm/W	4000 K	> 80	OP	—	+10°C / +40°C
COBRA L1200 1 3300/830 OP	1	3300 lm	41 W	81 lm/W	3000 K	> 80	OP	—	+10°C / +40°C
COBRA L1200 1 3500/840 OP	1	3500 lm	41 W	86 lm/W	4000 K	> 80	OP	—	+10°C / +40°C
COBRA L1500 1 2600/830 OP	1	2600 lm	31 W	84 lm/W	3000 K	> 80	OP	—	+10°C / +40°C
COBRA L1500 1 2700/840 OP	1	2700 lm	31 W	88 lm/W	4000 K	> 80	OP	—	+10°C / +40°C
COBRA L1500 1 3300/830 OP	1	3300 lm	41 W	81 lm/W	3000 K	> 80	OP	—	+10°C / +40°C
COBRA L1500 1 3500/840 OP	1	3500 lm	41 W	86 lm/W	4000 K	> 80	OP	—	+10°C / +40°C
COBRA L1500 1 5000/830 OP	1	5000 lm	62 W	81 lm/W	3000 K	> 80	OP	—	+10°C / +40°C
COBRA L1500 1 5300/840 OP	1	5300 lm	62 W	86 lm/W	4000 K	> 80	OP	—	+10°C / +40°C