

LIBERTY INDIRECT RAIL LED

SECTION 12 COMPLIANT VANDAL RESISTANT RANGE




Robust surface/recessed mounted enclosed luminaire section 12 compliant c/w toughened glass panel, low smoke & zero halogen cables / control gear c/w special gasket.

*Stainless steel version for special applications.

- IK10++ - IP65
- Fully Welded Fabricated Steel Body
- Optional Vandacoat Offering Enhanced Corrosion/Vandal & Graffiti Resistant Coating System
- Regressed Gasketed Bezel
- Captive Toughened Glass Diffuser
- Torx Security Screw Fixing
- Other RAL Colour Options
- Microwave Motion Detection Option

Applications:

Underground and Railway Applications.

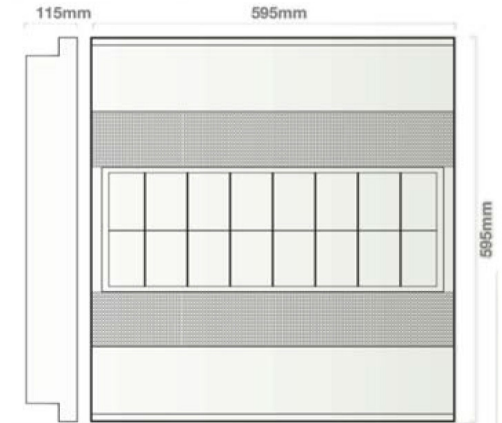

LED VERSIONS

Wattage	No LED's	CFL Equivalent
LIBL50wLED	50 watt / 5600lm LED Strip	2 x 36w PL HF
LIBL52wLED	52 watt / 5720lm LED Strip	2 x 40w PL HF
LIBL70wLED	70 watt / 7700lm LED Strip	2 x 55w PL HF

Suffix

/FSP	Flat Frosted Seamless Poly Diffuser
/W	White Finish
/S	Silver Finish
/SS	Fitted with Security Screws
/SD	Security Screwdriver
/M-WAVE	Microwave Motion Detection
/EYE	Eyelid Option
/VCOAT	Vandacoat (Enhanced Corrosion/Vandal & Graffiti Resistant Coating)