

STILO LEDIZ®
D100 L1250 1 3500/840

50 000 h
L80/B10

NEW
GENERATION



IP65

IP68
2 m

IK10

220-240V
50/60Hz



850°



OPTIONS

DIM
1-10V

DIM
DALI


PLUG
&
PLAY




STILO LEDIZ® DPB-HR



WIELAND® RST2013 IP68 (OPTION)

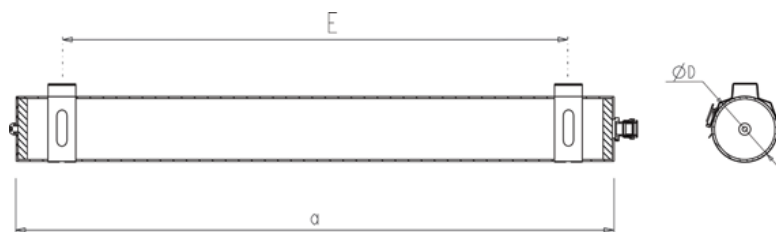

	a	E	D	D (option)
STILO LEDIZ® D100 L1250	1244	1150	100	70
STILO LEDIZ® D100 L1550	1544	1450	100	70



IP68 waterproof LED tubular luminaire.

- Mounting: surface or wall-mounted using stainless steel fastening brackets (to be ordered separately); connection through waterproof stuffing box or waterproof WIELAND® connector (on request)
- Lighting source: embedded LED modules featuring LEDIZ®, an exclusive and patented technology
- Electrical equipment: LED driver (dimming on request)
- Housing/Optical system: sheath made of bi-material (clear/opaque) co-extruded polycarbonate, thickness 2 mm; internal gear tray made of white lacquered steel sheet; end-caps made of stainless steel, with internal neoprene gasket ensuring sealing by expansion; versions with double-parabolic micro-optics OPTIMA® made of bright aluminum with high reflection coefficient (satin aluminum on request)

STILO LEDIZ®
D100 L1250 1 3500/840

DESIGNATION	# modules	lm _{output}	W _{system}	lm/W	CCT	Ra	Optic	UGR < 19	Ta (min/max)
STILO LEDIZ D100 L650 1 1000/830	1	1000 lm	11 W	95 lm/W	3000 K	> 80	-	-	-20°C / +50°C
STILO LEDIZ D100 L650 1 1100/840	1	1100 lm	11 W	100 lm/W	4000 K	> 80	-	-	-20°C / +50°C
STILO LEDIZ D100 L950 1 1600/830	1	1600 lm	17 W	95 lm/W	3000 K	> 80	-	-	-20°C / +50°C
STILO LEDIZ D100 L950 1 1700/840	1	1700 lm	17 W	100 lm/W	4000 K	> 80	-	-	-20°C / +50°C
STILO LEDIZ D100 L1250 1 2100/830	1	2100 lm	22 W	96 lm/W	3000 K	> 80	-	-	-20°C / +50°C
STILO LEDIZ D100 L1250 1 2200/840	1	2200 lm	22 W	100 lm/W	4000 K	> 80	-	-	-20°C / +50°C
STILO LEDIZ D100 L1250 1 3400/830	1	3400 lm	35 W	98 lm/W	3000 K	> 80	-	-	-20°C / +45°C
STILO LEDIZ D100 L1250 1 3500/840	1	3500 lm	35 W	100 lm/W	4000 K	> 80	-	-	-20°C / +45°C
STILO LEDIZ D100 L1550 1 2600/830	1	2600 lm	27 W	97 lm/W	3000 K	> 80	-	-	-20°C / +50°C
STILO LEDIZ D100 L1550 1 2700/840	1	2700 lm	27 W	100 lm/W	4000 K	> 80	-	-	-20°C / +50°C
STILO LEDIZ D100 L1550 1 5100/830	1	5100 lm	51 W	100 lm/W	3000 K	> 80	-	-	-20°C / +40°C
STILO LEDIZ D100 L1550 1 5300/840	1	5300 lm	51 W	104 lm/W	4000 K	> 80	-	-	-20°C / +40°C
STILO LEDIZ D100 L1550 1 5900/830	1	5900 lm	62 W	95 lm/W	3000 K	> 80	-	-	-20°C / +35°C
STILO LEDIZ D100 L1550 1 6200/840	1	6200 lm	62 W	100 lm/W	4000 K	> 80	-	-	-20°C / +35°C
STILO LEDIZ D100 L650 1 900/830 DPB-HR	1	900 lm	11 W	85 lm/W	3000 K	> 80	DPB-HR	●	-20°C / +50°C
STILO LEDIZ D100 L650 1 1000/840 DPB-HR	1	1000 lm	11 W	91 lm/W	4000 K	> 80	DPB-HR	●	-20°C / +50°C
STILO LEDIZ D100 L950 1 1500/830 DPB-HR	1	1500 lm	17 W	89 lm/W	3000 K	> 80	DPB-HR	●	-20°C / +50°C
STILO LEDIZ D100 L950 1 1600/840 DPB-HR	1	1600 lm	17 W	95 lm/W	4000 K	> 80	DPB-HR	●	-20°C / +50°C
STILO LEDIZ D100 L1250 1 1900/830 DPB-HR	1	1900 lm	22 W	87 lm/W	3000 K	> 80	DPB-HR	●	-20°C / +50°C
STILO LEDIZ D100 L1250 1 2000/840 DPB-HR	1	2000 lm	22 W	91 lm/W	4000 K	> 80	DPB-HR	●	-20°C / +50°C
STILO LEDIZ D100 L1250 1 3100/830 DPB-HR	1	3100 lm	35 W	89 lm/W	3000 K	> 80	DPB-HR	●	-20°C / +45°C
STILO LEDIZ D100 L1250 1 3200/840 DPB-HR	1	3200 lm	35 W	92 lm/W	4000 K	> 80	DPB-HR	●	-20°C / +45°C
STILO LEDIZ D100 L1550 1 2400/830 DPB-HR	1	2400 lm	27 W	89 lm/W	3000 K	> 80	DPB-HR	●	-20°C / +50°C
STILO LEDIZ D100 L1550 1 2500/840 DPB-HR	1	2500 lm	27 W	93 lm/W	4000 K	> 80	DPB-HR	●	-20°C / +50°C
STILO LEDIZ D100 L1550 1 4600/830 DPB-HR	1	4600 lm	51 W	91 lm/W	3000 K	> 80	DPB-HR	●	-20°C / +40°C
STILO LEDIZ D100 L1550 1 4800/840 DPB-HR	1	4800 lm	51 W	95 lm/W	4000 K	> 80	DPB-HR	●	-20°C / +40°C
STILO LEDIZ D100 L1550 1 5400/830 DPB-HR	1	5400 lm	62 W	86 lm/W	3000 K	> 80	DPB-HR	●	-20°C / +35°C
STILO LEDIZ D100 L1550 1 5600/840 DPB-HR	1	5600 lm	62 W	90 lm/W	4000 K	> 80	DPB-HR	●	-20°C / +35°C