

# GARMEGA LED FP

## HIGH-BAY WEATHERPROOF LUMINAIRE




IP66



IK08

850°

Ta -5° to +40°

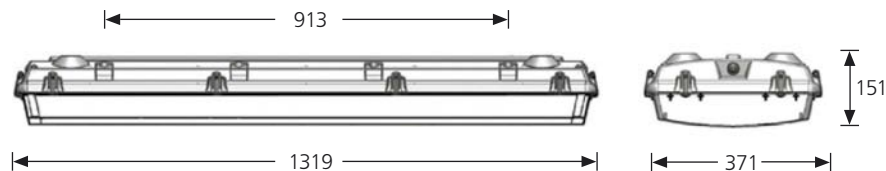

### TECHNICAL FEATURES

Description	Consumption	Efficiency	Luminous Flux
GARMEGA LED-M 4x1.2 PMMA	145W	130 lm/W	18,900 lm
GARMEGA LED-M 4x1.2 PC	145W	126 lm/W	18,300 lm

High power LED luminaire for mid to high ceiling applications as an alternative to metal halide high bays. Suitable for food production - storage facilities

### DESCRIPTION

**Housing** in compressed glass fibre reinforced polyester. Polyurethane gasket.

High-impact clear polycarbonate **diffuser** (PC), UV stabilized for maximizing efficiency and minimizing distortion.

White **gear tray** manufactured in pre-painted cold rolled steel.

Polyurethane **gasket** to guarantee an IP66 rating.

Stainless steel **clips**.

**Completely electrified** and equipped with **fast connector** for easy mounting.

### PRODUCT OPTIONS

- Samsung LED module
- 50.000 hour life (L70)
- 4000°K neutral white
- Ra>80
- Electronic dimmable driver
- Reflector in polished aluminium (MIRÓ 4)
- Emergency kit\*


### MOUNTING OPTIONS

- Surface mounting with mounting beam
- Pendant mount with hook suspension "Y"

The corresponding standard mounting accessories are supplied with the luminaire.

### ACCESSORIES

- Steel wire 2m with hook and express fastener.

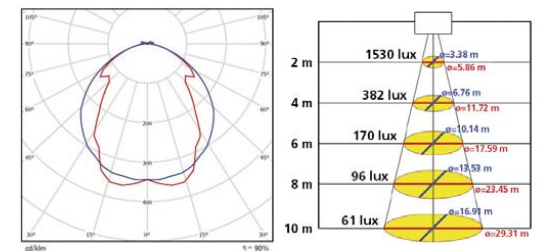

GARMEGA LED FP