

DL185/DL220 LED

GARRABRIDGE

Decorative downlight luminaire for suspended ceilings, degree of water and dust-proof IP20 and IP44, for LED light sources.

TECHNICAL DATA:

Mounting: in the ceiling, with mounting brackets (included))

Body: aluminum

Luminaire colour: white

ELECTRICAL DATA:

Power supply efficiency: >86%

Electrical connection: 2x1,5 mm² wire

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: LED driver

OPTICAL DATA:

Light distribution: circular

Way of lighting: direct

Reflector: aluminum, polished, faceted

ADDITIONAL INFO:

Available on request: DALI, LED emergency module

Operating temperature range: 0°C - 40°C


Other remarks: Flux of luminaire depends of the colour of the luminaire ring; claimed lux is appropriate for downlight luminaire in colour RAL9003

Lifetime (L70B50): 50 000 h

GENERAL DATA:

Warranty: 3 years + 2 years after project registration

Application: boutiques, delicatessen, jeweler, shopping centers, supermarkets, museums



Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Degree of water and dust-proof: IP20							
030241.5L01.3XX	13	15	1500	1245	83	3000	>80
030241.5L02.3XX	13	15	1500	1245	83	4000	>80
030241.5L03.3XX	18	21	2000	1650	79	3000	>80
030241.5L04.3XX	18	21	2000	1650	79	4000	>80
030241.5L05.3XX	28	32	3000	2500	78	3000	>80
030241.5L06.3XX	23	27	3000	2500	93	4000	>80
030241.5L07.3XX	43	48	5000	4100	85	3000	>80
030241.5L08.3XX	43	48	5000	4100	85	4000	>80
Degree of water and dust-proof: IP20/44							
030261.5L01.3XX	13	15	1500	1245	83	3000	>80
030261.5L02.3XX	13	15	1500	1245	83	4000	>80
030261.5L03.3XX	18	21	2000	1660	79	3000	>80
030261.5L04.3XX	18	21	2000	1660	79	4000	>80
030261.5L05.3XX	28	32	3000	2490	78	3000	>80
030261.5L06.3XX	23	27	3000	2490	92	4000	>80
030261.5L07.3XX	43	48	5000	4100	85	3000	>80
030261.5L08.3XX	43	48	5000	4100	85	4000	>80

030241.5L01.3			
		Ring colour	
1		white	
3		black	
4		red	
5		blue	
6		green	
		Beam angle	
1	36°		
2	76°		

Available versions:


white



black




red

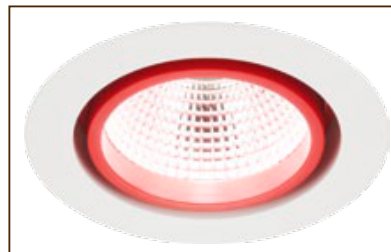

blue



green

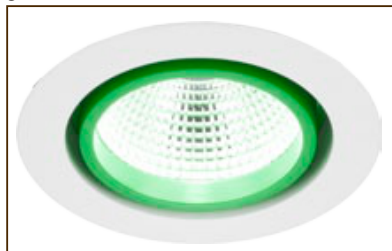

Code	Dimensions [mm] W H	Mounting dimensions [mm] W	Pallet quantity	Quantity in package	Net weight [kg]
Degree of water and dust-proof: IP20					
030241.5L01.3XX	192 117	170	240	1	1.1
030241.5L02.3XX	192 117	170	240	1	1.1
030241.5L03.3XX	192 117	170	240	1	1.1
030241.5L04.3XX	192 117	170	240	1	1.1
030241.5L05.3XX	192 117	170	240	1	1.1
030241.5L06.3XX	192 117	170	240	1	1.1
030241.5L07.3XX	192 117	170	240	1	1.1
030241.5L08.3XX	192 117	170	240	1	1.1
Degree of water and dust-proof: IP20/44					
030261.5L01.3XX	192 117	170	240	1	1.1
030261.5L02.3XX	192 117	170	240	1	1.1
030261.5L03.3XX	192 117	170	240	1	1.1
030261.5L04.3XX	192 117	170	240	1	1.1
030261.5L05.3XX	192 117	170	240	1	1.1
030261.5L06.3XX	192 117	170	240	1	1.1
030261.5L07.3XX	192 117	170	240	1	1.1
030261.5L08.3XX	192 117	170	240	1	1.1

