


# GARCOM MICRO

## CIRCULAR RECESSED



### PHOTOMETRY

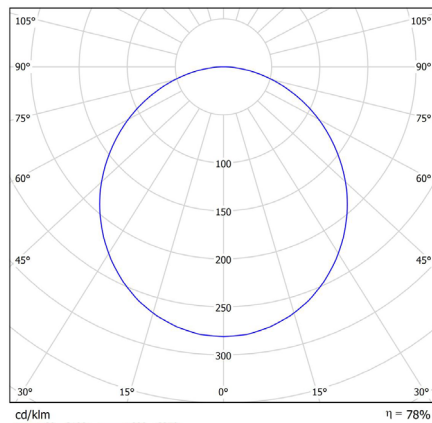

8W

### GARCOM MICRO CIRCULAR RECESSED 8W

- Recessed luminaire with bodies made of aluminium with thermo painted coating.
- Includes innovative PMMA optic which provides uniform illumination over the whole surface with a minimum thickness of the luminaire.
- All models include control gear and lamps.
- Composed of modules with LED Osram Duris E3 with total power of 8w.
- Estimate lifespan 40.000 hours.

#### TECHNICAL DATA:

**Lamp:** LED Osram Duris E3

**Equipment:** Driver 350 mA

**Watt:** 7.7W

**W Consumption:** 9.5 W

**Operating voltage:** 220-240v 50-60 Hz

**Life span:** 40.000h

**Colour temperature:** 3000°K (920 lum.) 4000°K (920 lum.) 5700°K (920 lum.)

**Protection degree:** IP44

**Chromatic reprod. index CRI:** 80

**COLOURS:** White, Black, Gold, Chrome, Matt chrome, Striped nickel, Titanium

#### DIMENSIONS:

**Weight:** 0.1kg

**Height:** 25 mm

**Diameter:** Ø 82 mm

**Ceiling cut:** Ø 75 mm

**INSTALLATION:** For recessed ceiling, adaptable to all types of modular and plaster ceilings.

#### INCLUDES:

Includes driver and 8w LED lamp.

Standardly supplied with 4000° K LED lamp.

#### ACCESSORIES:

**DRF** Dimmable driver edge phase

**DR** 1-10v Dimmable driver

**DRD** Dali Dimmable driver

**DRP** Dimmable driver with push button

**PCFT** Lighting control system for DR

**3420** Wire connector for DR

**4160** Driver to power 12 Vdc

**4160 24** Driver to power 24 Vdc

**AM** Special marine environment paint

