

# GARCOM MEDIUM

CIRCULAR 20 W



## GARCOM MEDIUM LED CIRCULAR 20W

- Bodies made in aluminium with thermo paint coating.
- Innovative optic PMMA wich provides uniform illumination over the whole surface with a minimum thickness of the luminaire.
- Driver included in the luminaire suitable for type of power.
- Composed of modules with LEDs Osram Duris E5, of 0,27W each, with total power of 20W.
- Estimated life spam 50.000 hours.

### TECHNICAL DATA:

**Lamp:** LEDs Osram Duris E5 de 0,27W

**Equipment:** Driver 700 mA

**Watt:** 20W

**W Consumption:** 23 W

**Operating voltage:** 220-240v 50-60 Hz

**Life span:** 50.000h

**Colour temperature:** 3000°K (2600 lum.) 4000°K (2677 lum.) 5700°K (2677 lum.)

**Protection degree:** IP44

**Chromatic reprod. index CRI:** 80

**COLOURS:** White, Black, Matt chrome, Titanium, Gold, Chrome, Striped nickel

### DIMENSIONS:

**Weight:** 0.7kg

**Height:** 45 mm

**Diameter:** Ø 213 mm

**Ceiling cut:** Ø 195 mm

**INSTALLATION:** For recessed ceiling, adaptable to all types of modular ceilings and plaster.

### INCLUDES:


Includes driver and 20W LED lamp.

Standardly supplied with 4000° K LED lamp.

### ACCESSORIES:

**DRD** Driver regulable Dali / Dali Dimmable driver.

### PHOTOMETRY

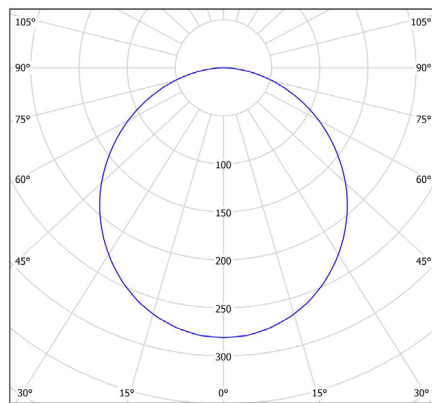

Separación [m]	Diámetro cónico [m]	Intensidad luminica [lx]
0.5	1.41	E(0°) 3008 E(C0) 293
1.0	2.81	E(0°) 752 E(C0) 73
1.5	4.22	E(0°) 334 E(C0) 33
2.0	5.63	E(0°) 188 E(C0) 18
2.5	7.04	E(0°) 120 E(C0) 12
3.0	8.44	E(0°) 84 E(C0) 8

