



KONAK LED 150W

- Body made of injected grey thermo painted aluminium.
- LED lamps with CRI>80 includes 80° optics. Included transparent waterproof PMMA with UV protection.
- Luminaire suitable for ambient temperatures between -30°C and 40°C.
- Driver with IP65 included for all models. Optionally supplied with 1-10V dimmable driver, Dali dimmable driver, or programmable dimmable driver (DRP).
- It can be supplied with emergency LED kit for 1h or 3h made by 8 LEDs with a total power output of 6w (726 lum).
- Environment temperature: -30°C/+40°C

TECHNICAL DATA:

Lamp: LED Osram Oslon SSL

Equipment: Driver

Watt: 150W

W Consumption: 11 W

Operating voltage: 90-305v 47-63Hz

Life span: 50.000h

Colour temperature: 3000°K (15680 lum.) 4000°K (16240 lum.) 5000°K (16800 lum.)

Opening angle (degrees): 80°

Protection degree: IP65

Chromatic reprod. index CRI: >80

Protection degree: IK08

COLOURS: Grey, Matt Gold

DIMENSIONS:

Weight: 9kg

Height: 109 mm

Diameter: Ø 450 mm

INSTALLATION: Directly hung up on ceiling by a 1 meter length suspension kit (Screw and suspension not included). One quick connector of 3 or 5 poles allows the installation without opening the luminaire.


INCLUDES:

Includes driver and 150W LED lamps.
Standardly supplied with 5000° K lamp.


ACCESSORIES:

- DR** 1-10v Dimmable driver
- DRD** Dali Dimmable driver
- DRP** Programmable driver
- KE1** Emergency kit 1 hour of autonomy
- KE3** Emergency kit 3 hours of autonomy
- 3421** LED with optics 150° (3000°K/4000°K/5700°K)


PHOTOMETRY

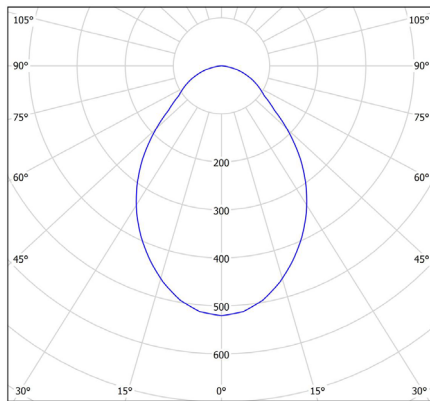

200W - 80° Optics

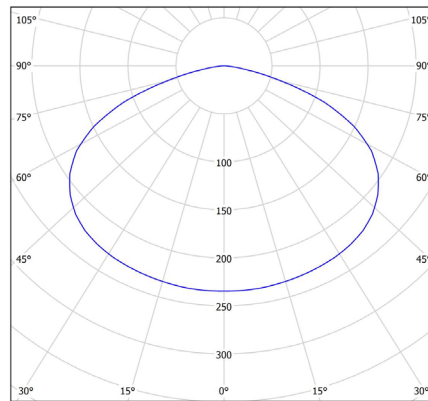

200W - 150° Optics



109

