

# RAPSODY IP65D

ULTRA-FLAT LED PANEL IP65



UP TO **106 lm/W**  
**50 000 h** L80B50  
**< 3 SDCM**



- LED
- IP65
- IK06
- 230-240V  
50/60Hz
- CL II
- 650°
- CE
- RoHS compliant

OPTIONS

- DIM
- COOL WHITE
- 110-277V  
50/60Hz



	L	W	H
RAPSODY IP65D M600X600	596	596	13,5
RAPSODY IP65D M1200X300	1196	296	13,5

Code	Im <sub>out.</sub>	W <sub>sys.</sub>	lm/W	CCT	Ta <sub>min/max</sub>			
<b>Mod. 600x600 mm - 3000/4000 K - Ra&gt;80 - Opal diffuser / Diffuseur opale</b>								
RAPSODY IP65D M600X600 3400/830 OP	3400 lm	34 W	100 lm/W	3000 K	+10°C / +40°C	4,6 kg	1	50
RAPSODY IP65D M600X600 3600/840 OP	3600 lm	34 W	106 lm/W	4000 K	+10°C / +40°C	4,6 kg	1	50
<b>Mod. 1200x300 mm - 3000/4000 K - Ra&gt;80 - Opal diffuser / Diffuseur opale</b>								
RAPSODY IP65D M1200X300 3400/830 OP	3400 lm	34 W	100 lm/W	3000 K	+10°C / +40°C	4,6 kg	1	50
RAPSODY IP65D M1200X300 3600/840 OP	3600 lm	34 W	106 lm/W	4000 K	+10°C / +40°C	4,6 kg	1	50

Ultra-flat LED panel IP65.


**Mounting:** Lay-in (LI) recessed in modular false ceilings, or lay-out (LO) into plasterboard ceilings using brackets (to be ordered separately)

**Lighting source:** SMD LEDs

**Electrical equipment:** remote LED driver (dimming on request)

**Housing:** frame made of steel sheet, height 13.5 mm, white RAL 9016 finish

**Optical system:** multi-layer light guide with opal (OP) diffuser; internal gasket ensuring sealing

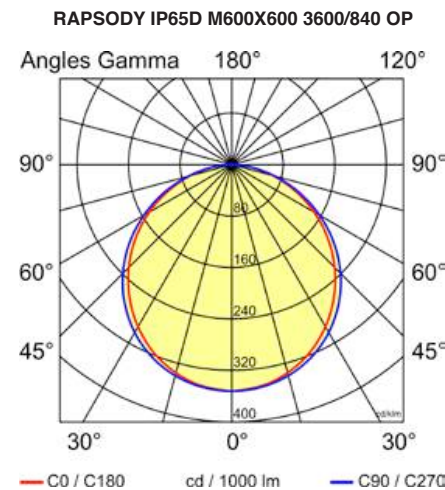

ACCESSORIES



**KIT LO:** Adjustment frame for lay-out (LO) recessed mounting