

GBGLA


DOWNLIGHTER - TYPE A

GARRABRIDGE



3-IN-1
3000°K
4000°K
5000°K

Cut out 65mm Ø

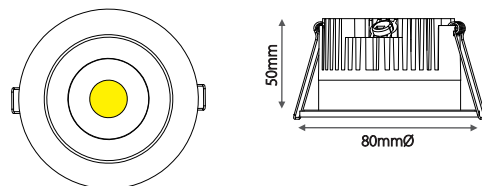

PRODUCT CODE
GBGLA0750EXT
GBGLA0750EXEM
GBGLA0750EXD

8W c/w white bezel
8W c/w white bezel and 3 Hr Emg
8W with DALI driver and white bezel

GBGLABB
GBGLAGB
GBGLACB
GBGLASB

Black Bezel
Gold Bezel
Chrome Bezel
Brushed Steel Bezel



AVAILABLE OPTIONS

Bezel colour

BB - Black, **CB** - Chrome, **SB** - Brushed Steel or **GB** - Gold

Dimmable Version

XD - DALI, **AD** - 1-10V

Fire rated IP65 Tunable downlighter

Fire rated fixed recessed 8W LED to fit void as shallow as 75mm. Incorporated with a built-in tunable white feature, allowing you to switch select colour temperature of 3000°K, 4000°K or 5000°K (3-in-1). Suitable with Trailing or Leading edge dimming as standard.

Supplied with White bezel as standard. (other colours are available)

SPECIFICATIONS

- Die-cast aluminium heatsink
- Die cast interchangeable bezel
- White bezel as Standard
- Plug n Play driver
- Triac dimming as Standard
- Thermal cooling housing
- Fire rating tested to FR90 (90min)

ELECTRICAL INPUT DATA

Rated input Voltage: 220-240 Vac
Rated input Frequency: 50 - 60 Hz
Rated input Current: 0.04A
Power factor: >0.90

OPTICAL CHARACTERISTICS

Wattage: 8W
CCT: 3000°K 4000°K 5000°K
Lumens: 680 lm 750 lm 700 lm
CRI: >80
Beam Angle: 36°
Life L70 (hrs): 50,000 hrs
WW = Warm White 3000°K
NW = Neutral White 4000°K
CW = Cool White 5000°K



GBGLABB Black



GBGLAGB Gold



GBGLACB Chrome



GBGLASB Brushed Steel