



3-IN-1
3000°K
4000°K
5000°K



Fire rated IP65 Tunable downlighter

Fire rated fixed recessed 13W LED to fit void as shallow as 95mm. Incorporated with inbuilt tunable white feature, allowing you to selected colour temperature of 3000°K, 4000°K or 5000°K. Suitable with Trailing or Leading edge dimming as standard.

Supplied with White bezel as standard.(other colours are available)

SPECIFICATIONS

- Die-cast aluminium heatsink
- Die cast interchangeable bezel
- White bezel as Standard
- Plug n Play driver
- Triac dimming as Standard
- Thermal cooling housing
- Fire rating tested to FR90 (90min)


ELECTRICAL INPUT DATA

Rated input Voltage: 220-240 Vac
Rated input Frequency: 50 - 60 Hz
Rated input Current: 0.065A
Power factor: >0.90

OPTICAL CHARACTERISTICS

Wattage: 13W
CCT: 3000°K 4000°K 5000°K
Lumens: 1100 lm 1200 lm 1140 lm
CRI: >80
Beam Angle: 36°
Life L70 (hrs): 50,000 hrs
WW = Warm White 3000°K
NW = Neutral White 4000°K
CW = Cool White 5000°K

Cut out 80mm Ø

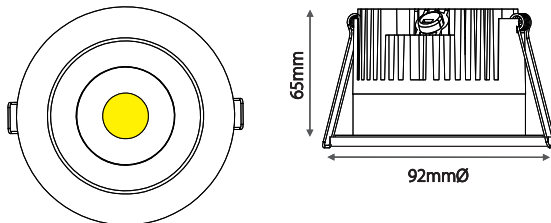

PRODUCT CODE
GBGLB1200EXT
GBGLB1200EXTEM
GBGLB1200EXD

13W c/w white bezel
 13W c/w white bezel and 3 Hr Emg
 13W with DALI driver and white bezel

GBGLBBB
GBGLBGB
GBGLBCB
GBGLBSB

Black Bezel
 Gold Bezel
 Chrome Bezel
 Brushed Steel Bezel

AVAILABLE OPTIONS

Bezel colour
BB - Black, CB - Chrome, SB - Brushed Steel or GB - Gold

Dimmable Version
XD - DALI, AD - 1-10V



GBGLBBB Black



GBGLBGB Gold



GBGLBCB Chrome



GBGLBSB Brushed Steel