



142

PROFI 80 LED LINE



INDOOR 06

LED
PROFI
SYSTEM

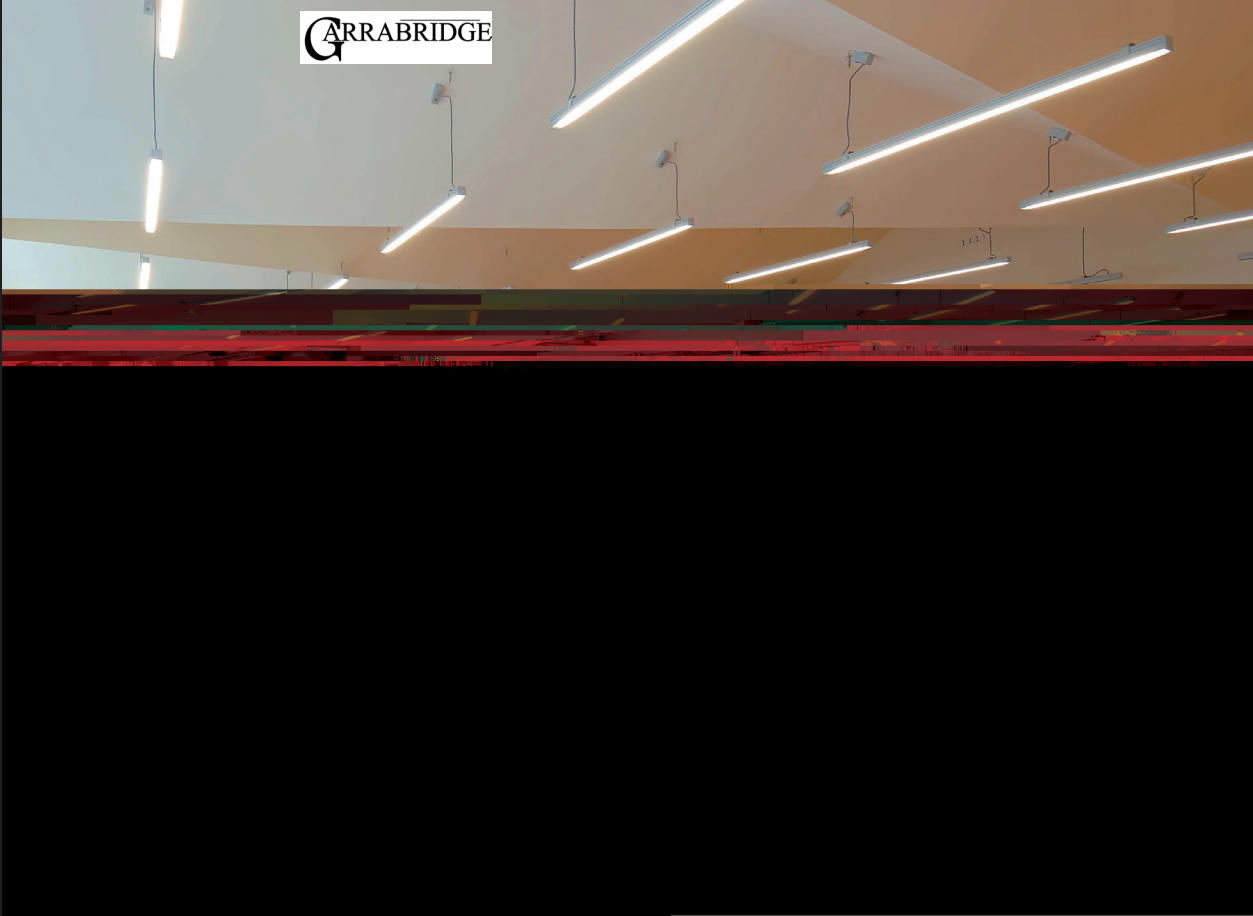

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Length	Weight
0000-003499.LL2200/830	2200 lm	16 W	3000 K	80 Ra	50,000 h	581 mm	1,50 kg
0000-003499.LL2200/840	2200 lm	16 W	4000 K	80 Ra	50,000 h	581 mm	1,50 kg
0000-003499.LL3300/830	3300 lm	24 W	3000 K	80 Ra	50,000 h	862 mm	2,00 kg
0000-003499.LL3300/840	3300 lm	24 W	4000 K	80 Ra	50,000 h	862 mm	2,00 kg
0000-003499.LL4400/830	4400 lm	32 W	3000 K	80 Ra	50,000 h	1143 mm	2,50 kg
0000-003499.LL4400/840	4400 lm	32 W	4000 K	80 Ra	50,000 h	1143 mm	2,50 kg
0000-003499.LL5500/830	5500 lm	40 W	3000 K	80 Ra	50,000 h	1424 mm	3,50 kg
0000-003499.LL5500/840	5500 lm	40 W	4000 K	80 Ra	50,000 h	1424 mm	3,50 kg
0000-003499.LL8000/830	8000 lm	62 W	3000 K	80 Ra	50,000 h	1143 mm	2,50 kg
0000-003499.LL8000/840	8000 lm	62 W	4000 K	80 Ra	50,000 h	1143 mm	2,50 kg
0000-003499.LL10000/830	10000 lm	77 W	3000 K	80 Ra	50,000 h	1424 mm	3,50 kg
0000-003499.LL10000/840	10000 lm	77 W	4000 K	80 Ra	50,000 h	1424 mm	3,50 kg

IP20

230 V
50 Hz


CE

PROFI 60 LED LINE

- Pendent, surface mounted or recessed LED luminaires.
- Opal or acrylic diffuser
 - Light source - Fortimo LED Line or PrevaLED Linear
 - Standard EVG ballast, Touch DALI version on request.
 - Body made of aluminium profile and available in all RAL colours
 - This luminaire can be mounted directly to the ceiling or pendent on steel wires and can be connected in long lighting lines.
 - We can prepare it in different lengths and shapes on request.
 - High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

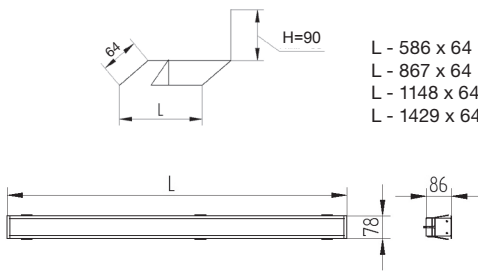


Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Length	Weight
0000-003500.LL2200/830	2200 lm	16 W	3000 K	80 Ra	50,000 h	601 mm	1,50 kg
0000-003500.LL2200/840	2200 lm	16 W	4000 K	80 Ra	50,000 h	601 mm	1,50 kg
0000-003500.LL3300/830	3300 lm	24 W	3000 K	80 Ra	50,000 h	882 mm	2,00 kg
0000-003500.LL3300/840	3300 lm	24 W	4000 K	80 Ra	50,000 h	882 mm	2,00 kg
0000-003500.LL4400/830	4400 lm	32 W	3000 K	80 Ra	50,000 h	1163 mm	2,50 kg
0000-003500.LL4400/840	4400 lm	32 W	4000 K	80 Ra	50,000 h	1163 mm	2,50 kg
0000-003500.LL5500/830	5500 lm	40 W	3000 K	80 Ra	50,000 h	1444 mm	3,50 kg
0000-003500.LL5500/840	5500 lm	40 W	4000 K	80 Ra	50,000 h	1444 mm	3,50 kg
0000-003500.LL8000/830	8000 lm	62 W	3000 K	80 Ra	50,000 h	1163 mm	2,50 kg
0000-003500.LL8000/840	8000 lm	62 W	4000 K	80 Ra	50,000 h	1163 mm	2,50 kg
0000-003500.LL10000/830	10000 lm	77 W	3000 K	80 Ra	50,000 h	1444 mm	3,50 kg
0000-003500.LL10000/840	10000 lm	77 W	4000 K	80 Ra	50,000 h	1444 mm	3,50 kg

IP20

230 V
50 Hz

CE

GARRABRIDGE reserves rights to introduce any construction or technical changes in the products. Wattage of products may vary due to constant LED efficacy improvements.

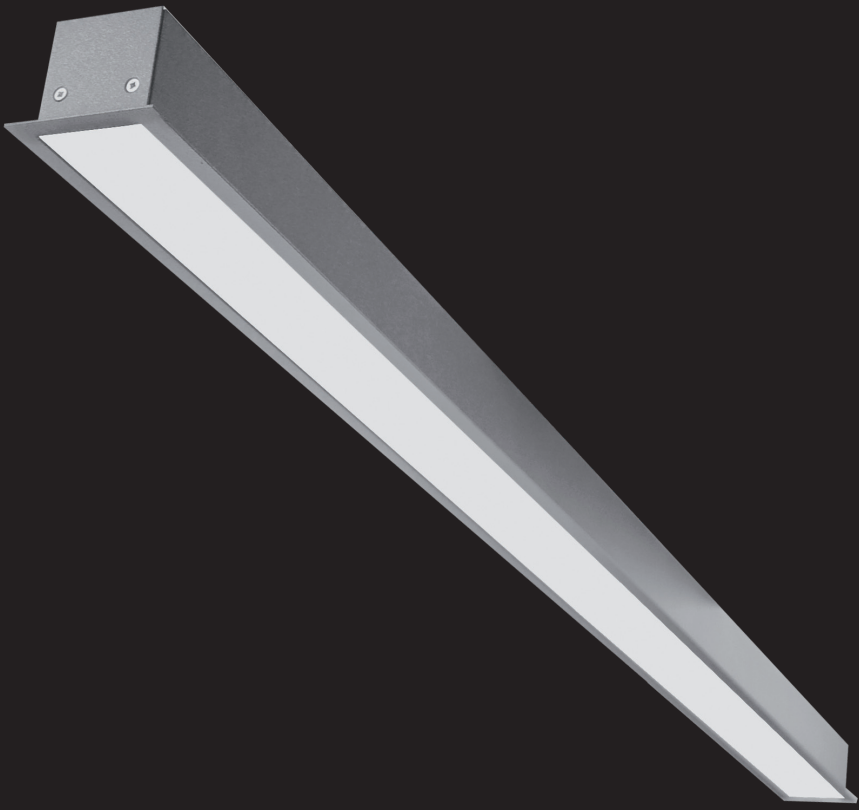

PROFI 60 R LED LINE



PROFI 80 LED LINE



Pendent, surface mounted or recessed LED luminaires with opal or acrylic diffuser.
Light source - Fortimo LED Line or PrevaLED Linear.
Standard EVG ballast, Touch DALI version on request.
Body is made of aluminium profile and available in all RAL colours.
This luminaire can be mounted directly to the ceiling or pendent on steel wires and can be connected in long lighting lines.
We can prepare it in different lengths and shapes on request.
High quality, energy efficient white LED light with CRI 80.


- Perfect replacement for conventional T5 luminaires in:
- Offices
 - Public buildings
 - Hotel lobbies and receptions
 - Retail




PROFI 80 R LED LINE




Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Length	Weight
0000-004589.LL2200/830	2200 lm	16 W	3000 K	80 Ra	50,000 h	581 mm	1,70 kg
0000-004589.LL2200/840	2200 lm	16 W	4000 K	80 Ra	50,000 h	581 mm	1,70 kg
0000-004589.LL3300/830	3300 lm	24 W	3000 K	80 Ra	50,000 h	862 mm	2,20 kg
0000-004589.LL3300/840	3300 lm	24 W	4000 K	80 Ra	50,000 h	862 mm	2,20 kg
0000-004589.LL4400/830	4400 lm	32 W	3000 K	80 Ra	50,000 h	1143 mm	2,70 kg
0000-004589.LL4400/840	4400 lm	32 W	4000 K	80 Ra	50,000 h	1143 mm	2,70 kg
0000-004589.LL5500/830	5500 lm	40 W	3000 K	80 Ra	50,000 h	1424 mm	3,70 kg
0000-004589.LL5500/840	5500 lm	40 W	4000 K	80 Ra	50,000 h	1424 mm	3,70 kg
0000-004589.LL8000/830	8000 lm	62 W	3000 K	80 Ra	50,000 h	1143 mm	2,70 kg
0000-004589.LL8000/840	8000 lm	62 W	4000 K	80 Ra	50,000 h	1143 mm	2,70 kg
0000-004589.LL10000/830	10000 lm	77 W	3000 K	80 Ra	50,000 h	1424 mm	3,70 kg
0000-004589.LL10000/840	10000 lm	77 W	4000 K	80 Ra	50,000 h	1424 mm	3,70 kg



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Length	Weight
0000-004410.LL2200/830	2200 lm	16 W	3000 K	80 Ra	50,000 h	601 mm	1,70 kg
0000-004410.LL2200/840	2200 lm	16 W	4000 K	80 Ra	50,000 h	601 mm	1,70 kg
0000-004410.LL3300/830	3300 lm	24 W	3000 K	80 Ra	50,000 h	882 mm	2,20 kg
0000-004410.LL3300/840	3300 lm	24 W	4000 K	80 Ra	50,000 h	882 mm	2,20 kg
0000-004410.LL4400/830	4400 lm	32 W	3000 K	80 Ra	50,000 h	1163 mm	2,70 kg
0000-004410.LL4400/840	4400 lm	32 W	4000 K	80 Ra	50,000 h	1163 mm	2,70 kg
0000-004410.LL5500/830	5500 lm	40 W	3000 K	80 Ra	50,000 h	1444 mm	3,70 kg
0000-004410.LL5500/840	5500 lm	40 W	4000 K	80 Ra	50,000 h	1444 mm	3,70 kg
0000-004410.LL8000/830	8000 lm	62 W	3000 K	80 Ra	50,000 h	1163 mm	2,70 kg
0000-004410.LL8000/840	8000 lm	62 W	4000 K	80 Ra	50,000 h	1163 mm	2,70 kg
0000-004410.LL10000/830	10000 lm	77 W	3000 K	80 Ra	50,000 h	1444 mm	3,70 kg
0000-004410.LL10000/840	10000 lm	77 W	4000 K	80 Ra	50,000 h	1444 mm	3,70 kg

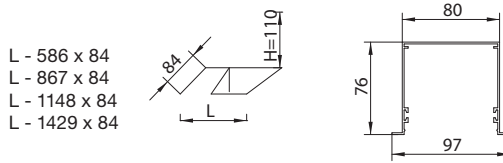

PROFI 48 WLX LED

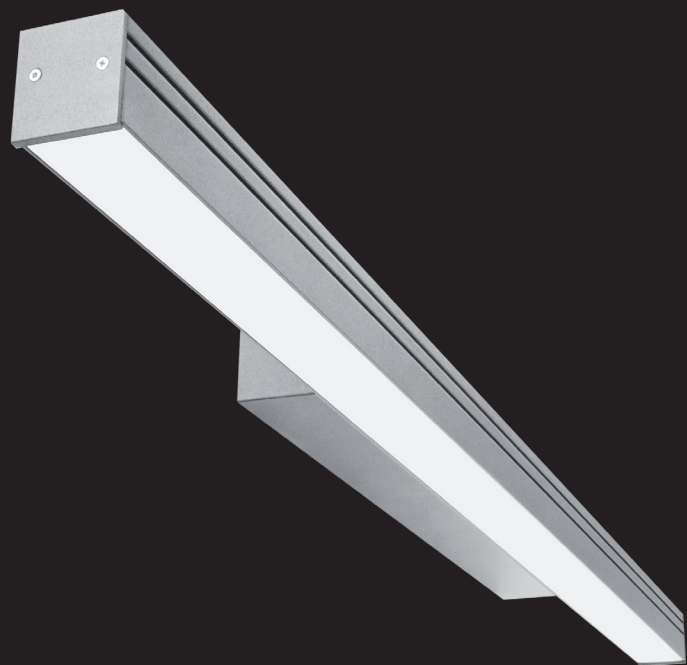


Wall mounted LED luminaire. Light source - Fortimo LED Line or PrevaLED Linear. Standard EVG ballast, Touch DALI version on request. Body is made of aluminium profile and available in all RAL colours.

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:


- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Length	Weight
0000-003493.LL2200/830	2200 lm	16 W	3000 K	80 Ra	50,000 h	626 mm	2,00 kg
0000-003493.LL2200/840	2200 lm	16 W	4000 K	80 Ra	50,000 h	626 mm	2,00 kg
0000-003493.LL4400/830	4400 lm	32 W	3000 K	80 Ra	50,000 h	1186 mm	2,50 kg
0000-003493.LL4400/840	4400 lm	32 W	4000 K	80 Ra	50,000 h	1186 mm	2,50 kg



PROFI 60 WLX LED UP/DN

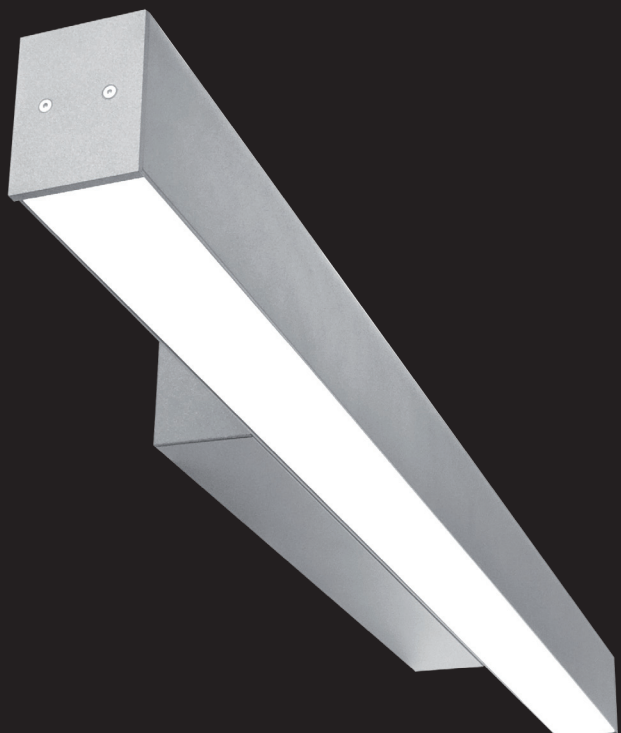


Wall mounted direct/indirect LED luminaire. Light source - Fortimo LED Line or PrevaLED Linear. Standard EVG ballast, Touch DALI version on request. Body is made of aluminium profile and available in all RAL colours.


High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Length	Weight
0000-003494.LL4400/830	2x2200 lm	32 W	3000 K	80 Ra	50,000 h	671 mm	2,00 kg
0000-003494.LL4400/840	2x2200 lm	32 W	4000 K	80 Ra	50,000 h	671 mm	2,00 kg
0000-003494.LL8800/830	2x4400 lm	65 W	3000 K	80 Ra	50,000 h	1231 mm	3,00 kg
0000-003494.LL8800/840	2x4400 lm	65 W	4000 K	80 Ra	50,000 h	1231 mm	3,00 kg

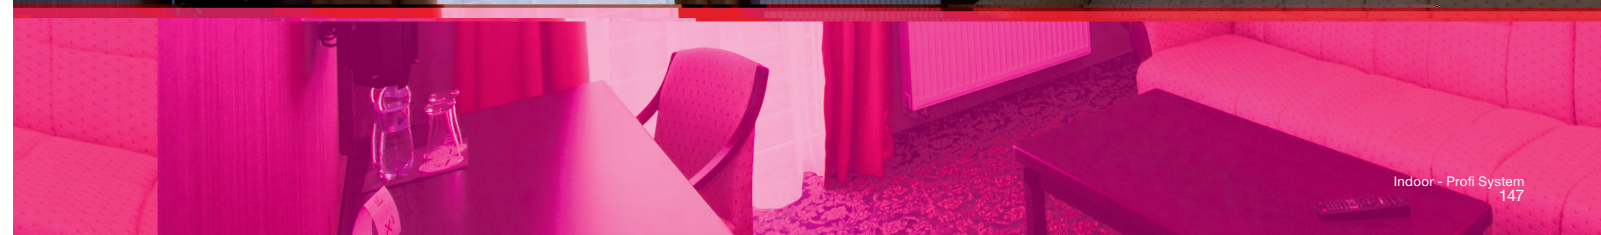

PROFI TECS OP LED LINE




Pendent, direct LED luminaire. Light source - Fortimo LED Line or PrevaLED Linear. Standard EVG ballast, Touch DALI version on request. Body is made of aluminium profile and available in all RAL colours. This luminaire can be connected in long lighting lines. We can prepare it in different lengths and shapes on request. Standard length of suspension set - 1,5 meter.

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

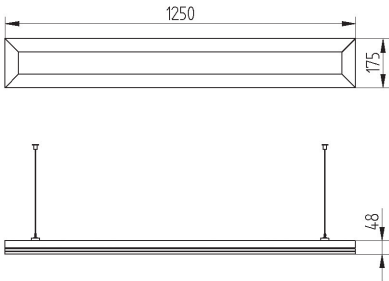

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003506.LL4400/830	4400 lm	32 W	3000 K	80 Ra	50,000 h	3,20 kg
0000-003506.LL4400/840	4400 lm	32 W	4000 K	80 Ra	50,000 h	3,20 kg
0000-003506.LL8000/830	8000 lm	62 W	3000 K	80 Ra	50,000 h	3,20 kg
0000-003506.LL8000/840	8000 lm	62 W	4000 K	80 Ra	50,000 h	3,20 kg



PROFI TECS IND LED LINE




Pendent, indirect LED luminaire. Light source - Fortimo LED Line or PrevaLED Linear. Standard EVG ballast, Touch DALI version on request. Body is made of aluminium profile and available in all RAL colours. This luminaire can be connected in long lighting lines. We can prepare it in different lengths and shapes on request. Standard length of suspension set - 1,5 meter.

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional T5 luminaires in:


- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail

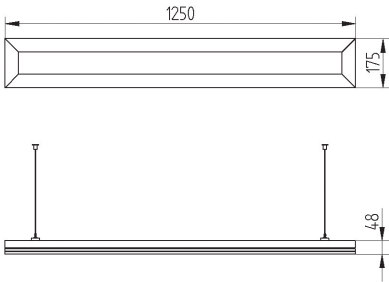


Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003507.LL4400/830	4400 lm	32 W	3000 K	80 Ra	50,000 h	3,20 kg
0000-003507.LL4400/840	4400 lm	32 W	4000 K	80 Ra	50,000 h	3,20 kg
0000-003507.LL8000/830	8000 lm	62 W	3000 K	80 Ra	50,000 h	3,20 kg
0000-003507.LL8000/840	8000 lm	62 W	4000 K	80 Ra	50,000 h	3,20 kg



PROFI 48 MIRROR LED

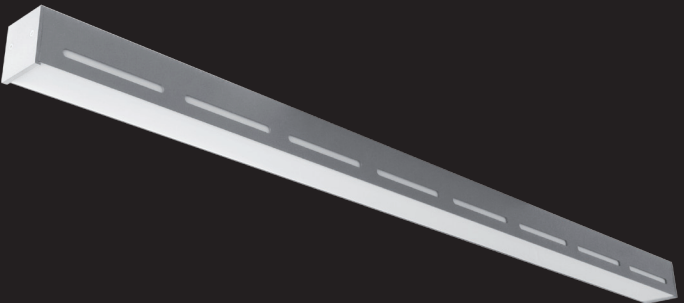

Wall mounted IP44 LED luminaire. Body is made of aluminium profile and it is available in all RAL colours. Light source - LED stripe.

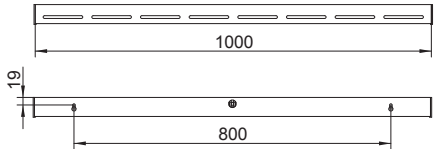

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003784.1800/830	1800 lm	30 W	3000 K	80 Ra	30,000 h	1,45 kg
0000-003784.1800/840	1800 lm	30 W	4000 K	80 Ra	30,000 h	1,45 kg




Surface mounted LED luminaire. Body is made of aluminium profile and it is available in all RAL colours. Light source - Fortimo LED Line Square or Tridonic Stark QLE. Standard EVG ballast, DALI version on request. This luminaire is also available in suspended version - please add PND after the article name and index number.

High quality, energy efficient white LED light with CRI 80.

Perfect replacement for conventional luminaires in:

- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail




Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003505.ST5000/830	5000 lm	40 W	3000 K	80 Ra	50,000 h	5,50 kg
0000-003505.ST5000/840	5000 lm	40 W	4000 K	80 Ra	50,000 h	5,50 kg
0000-003505.LLS10000/830	10000 lm	69 W	3000K	80 Ra	50,000 h	5,50 kg
0000-003505.LLS10000/840	10000 lm	69 W	4000K	80 Ra	50,000 h	5,50 kg




LL - Philips Fortimo LED Line Square
ST - Tridonic Stark QLE

LED STRIPES

PROFI LED STRIPE

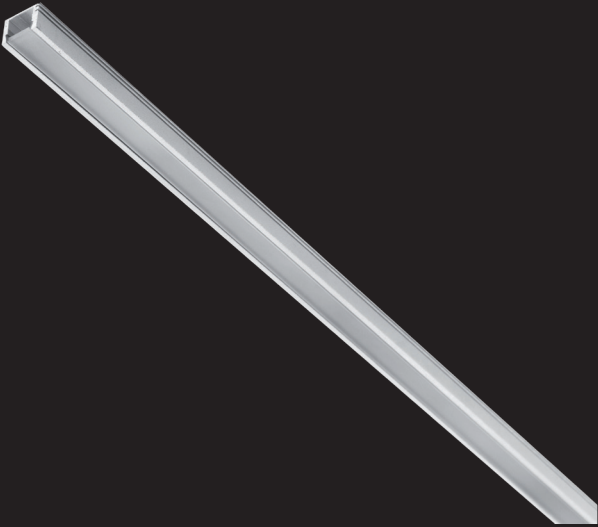


Surface mounted and recessed aluminium profile with led stripe, standard anodized. Other colours are available on request. Different lenghts of profile and colours of LEDs are possible. Diffuser can be clear or opal. Different types of LED stripes can be mounted inside this profile - details below (please put the index number of the chosen LED stripe after the index number of aluminum profile).

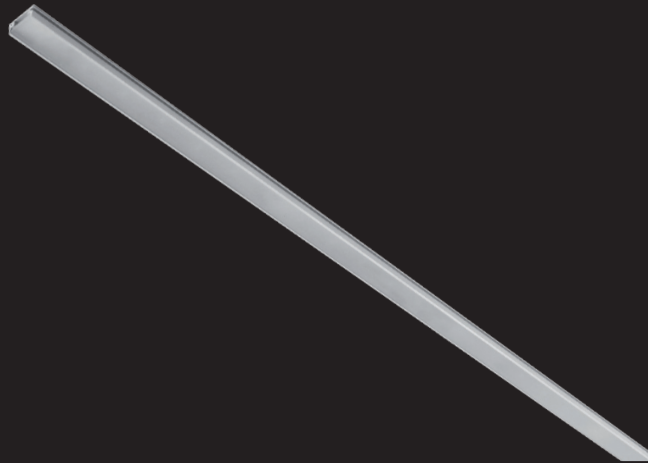

PROFI LED STRIPE R



Index no.	Description
0000-002764	PROFI LED STRIPE - please put the index number of the chosen LED stripe after the index number of aluminum profile



Index no.	Description
0000-002765	PROFI LED STRIPE - R - please put the index number of the chosen LED stripe after the index number of aluminum profile

GARRABRIDGE reserves rights to introduce any construction or technical changes in the products.
Wattage of products may vary due to constant LED efficacy improvements.

POWER SUPPLY FOR LED STRIPES			
Index no.	Description	Voltage	
0000-004598.25	Power supply economy line, 25W	12V DC	
0000-004598.50	Power supply economy line, 50W	12V DC	
0000-004598.75	Power supply economy line, 75W	12V DC	
0000-004598.100	Power supply economy line, 100W	12V DC	
0000-004598.150	Power supply economy line, 150W	12V DC	
0000-004598.200	Power supply economy line, 200W	12V DC	
0000-002801.18	Power supply premium, hermetic housing, 18W	12V DC	
0000-002801.36	Power supply premium, hermetic housing, 36W	12V DC	
0000-002801.60	Power supply premium, hermetic housing, 60W	12V DC	
0000-002801.100	Power supply premium, hermetic housing, 100W	12V DC	
0000-002801.132	Power supply premium, hermetic housing, 132W	12V DC	
0000-002801.196	Power supply premium, hermetic housing, 192W	12V DC	



Flexible led stripes - white or RGB colour changing. Available in any length - can be bended in different shapes. LEDs are arranged in sets of 3, you can cut the strip and make new strips or extend strips to make any combination of 3 lights. Led stripe comes with adhesive tape backing for easy mounting. Easy to use - just peel and stick.

FLEXIBLE LED STRIPES SMD3528			
Index no.	Description	Wattage	Colour
0000-002712.60.CW	Flexible led stripe SMD3528 60 LED/360 lm/1 m	4,8 W/1 m	Cool white
0000-002712.60.WW	Flexible led stripe SMD3528 60 LED/300 lm/1 m	4,8 W/1 m	Warm white
0000-002712.60.R	Flexible led stripe SMD3528 60 LED/120 lm/1 m	4,8 W/1 m	Red
0000-002712.60.G	Flexible led stripe SMD3528 60 LED/180 lm/1 m	4,8 W/1 m	Green
0000-002712.60.B	Flexible led stripe SMD3528 60 LED/90 lm/1 m	4,8 W/1 m	Blue
0000-002712.60.Y	Flexible led stripe SMD3528 60 LED/90 lm/1 m	4,8 W/1 m	Yellow
0000-002712.96.CW	Flexible led stripe SMD3528 96 LED/576 lm/1 m	7,7 W/1 m	Cool white
0000-002712.96.WW	Flexible led stripe SMD3528 96 LED/480 lm/1 m	7,7 W/1 m	Warm white
0000-002712.96.R	Flexible led stripe SMD3528 96 LED/192 lm/1 m	7,7 W/1 m	Red
0000-002712.96.G	Flexible led stripe SMD3528 96 LED/288 lm/1 m	7,7 W/1 m	Green
0000-002712.96.B	Flexible led stripe SMD3528 96 LED/144 lm/1 m	7,7 W/1 m	Blue
0000-002712.96.Y	Flexible led stripe SMD3528 96 LED/144 lm/1 m	7,7 W/1 m	Yellow
0000-002712.120.CW	Flexible led stripe SMD3528 120 LED/720 lm/1 m	9,6 W/1 m	Cool white
0000-002712.120.WW	Flexible led stripe SMD3528 120 LED/600 lm/1 m	9,6 W/1 m	Warm white
0000-002712.120.R	Flexible led stripe SMD3528 120 LED/240 lm/1 m	9,6 W/1 m	Red
0000-002712.120.G	Flexible led stripe SMD3528 120 LED/360 lm/1 m	9,6 W/1 m	Green
0000-002712.120.B	Flexible led stripe SMD3528 120 LED/180 lm/1 m	9,6 W/1 m	Blue
0000-002712.120.Y	Flexible led stripe SMD3528 120 LED/180 lm/1 m	9,6 W/1 m	Yellow

FLEXIBLE LED STRIPES SMD5050			
Index no.	Description	Wattage	Colour
0000-003805.30.RGB	Flexible led stripe SMD5050 30 LED/180 lm/1 m	7,2 W/1 m	RGB
0000-003805.30.CW	Flexible led stripe SMD5050 30 LED/540 lm/1 m	7,2 W/1 m	Cool white
0000-003805.30.WW	Flexible led stripe SMD5050 30 LED/450 lm/1 m	7,2 W/1 m	Warm white
0000-003805.60.RGB	Flexible led stripe SMD5050 60 LED/360 lm/1 m	14,4 W/1 m	RGB
0000-003805.60.CW	Flexible led stripe SMD5050 60 LED/1080 lm/1 m	14,4 W/1 m	Cool white
0000-003805.60.WW	Flexible led stripe SMD5050 60 LED/900 lm/1 m	14,4 W/1 m	Warm white

FLEXIBLE LED STRIPES SMD2835			
Index no.	Description	Wattage	Colour
0000-004599.60.CW	Flexible led stripe SMD2835 60 LED/1320 lm/1 m	14,4 W/1 m	Cool white
0000-004599.60.WW	Flexible led stripe SMD2835 60 LED/1320 lm/1 m	14,4 W/1 m	Warm white