156
CB LED WALL

165
ECO LED SQ 120

156
SQ 100 WALL LED

165
WALL LED SQ


158
LED DISC WALL

158
WALL LED SPOT

160
WL LED CUBE

162
WAVE

162
WL LED DECOR

164
WALL 60 SQ DECOR

164
WALL 60 SQ LED

INDOOR 07

LED WALL LUMINAIRES

CB LED WALL

Wall mounted square direct/indirect luminaire. Body is made of aluminium. All RAL colours are available.

Applications:
- Hospitality, healthcare and cruise ship applications: corridors, service areas, lobbies, lounges, restaurants, reception areas
- Home
- Retail
- Office



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-004524.600/827	2x300 lm	6 W	2700 K	80 Ra	50,000 h	0,60 kg
0000-004524.640/830	2x320 lm	6 W	3000 K	80 Ra	50,000 h	0,60 kg
0000-004524.680/840	2x340 lm	6 W	4000 K	80 Ra	50,000 h	0,60 kg

IP20 230 V 50 Hz

SQ 100 WALL LED

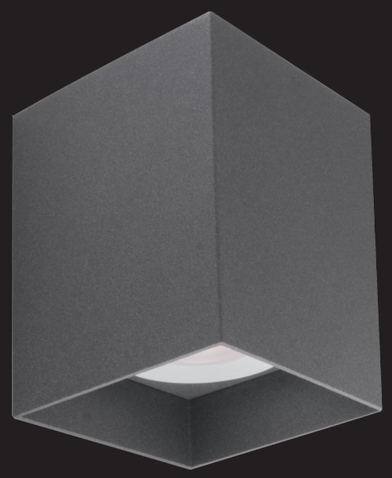

Wall mounted square Fortimo LED Disc luminaire. Body is made of aluminium. All RAL colours are available.

Product features:
- Leading edge dimming
- Superior light quality and performance
- Innovative and reliable LED solution
- Integrated driver
- Built-in beam angle (85°)

Ideal for replacing halogen 50 W, CFL 2x13W or incandescent 60W solutions in various applications:
- Hospitality, healthcare and cruise ship applications: corridors, service areas, lobbies, lounges, restaurants, reception areas
- Home
- Retail
- Office



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-004415.800/827	800 lm	12 W	2700 K	80 Ra	50,000 h	0,80 kg
0000-004415.800/830	800 lm	12 W	3000 K	80 Ra	50,000 h	0,80 kg
0000-004415.850/840	850 lm	11 W	4000 K	80 Ra	50,000 h	0,80 kg

IP20 230 V 50 Hz

GARRABRIDGE reserves rights to introduce any construction or technical changes in the products. Wattage of products may vary due to constant LED efficacy improvements.

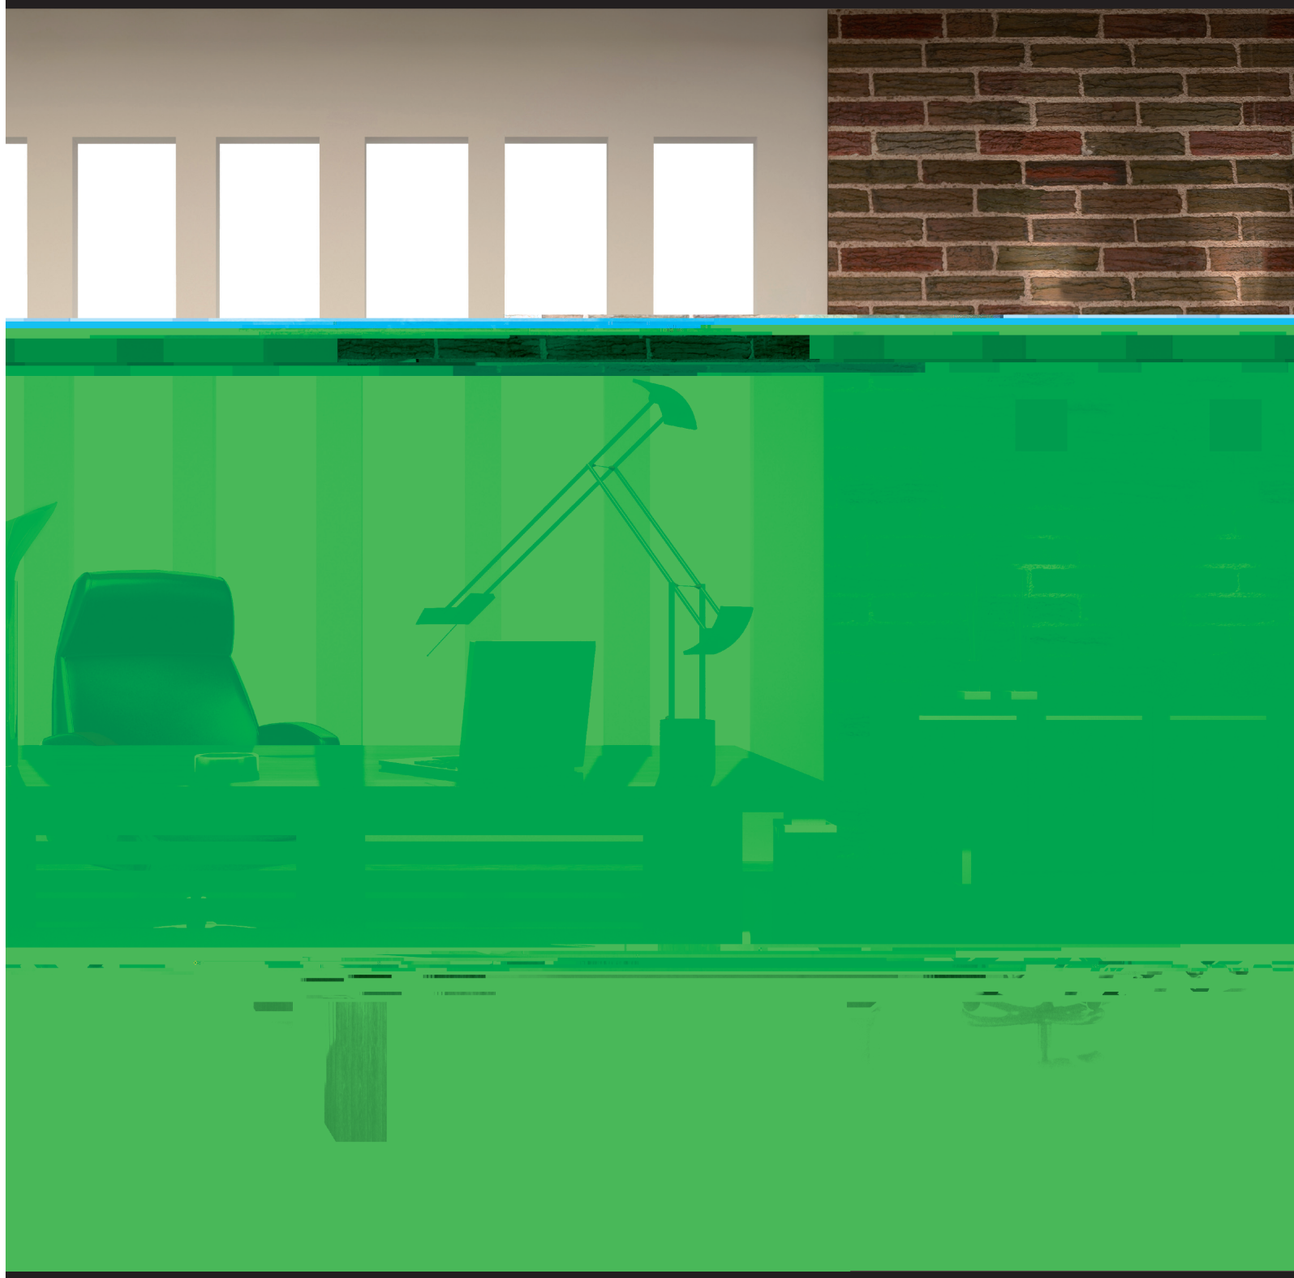

LED DISC WALL

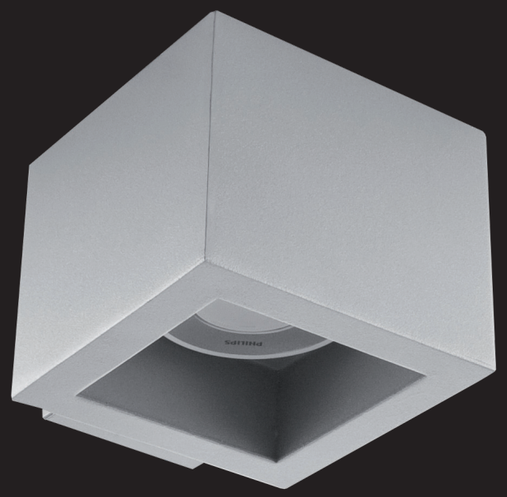

Wall mounted LED luminaire. Body is made of steel and aluminium, all RAL colours are available. Light source – Philips Fortimo LED Disc.

Product features:
- Leading edge dimming
- Superior light quality and performance
- Innovative and reliable LED solution
- Integrated driver
- Built-in beam angle (80°)

Ideal for replacing halogen 50 W, CFL 2x13W or incandescent 60W solutions in various applications:
- Hospitality, healthcare and cruise ship applications: corridors, service areas, lobbies, lounges, restaurants, reception areas
- Home applications: ceiling luminaires, shelf lighting
- Retail applications: corridors, changing rooms
- Office applications: corridors, meeting rooms



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003785.800/827	800 lm	12 W	2700 K	80 Ra	50,000 h	0,85 kg
0000-003785.800/830	800 lm	12 W	3000 K	80 Ra	50,000 h	0,85 kg
0000-003785.850/840	850 lm	11 W	4000 K	80 Ra	50,000 h	0,85 kg

IP20 230 V 50 Hz

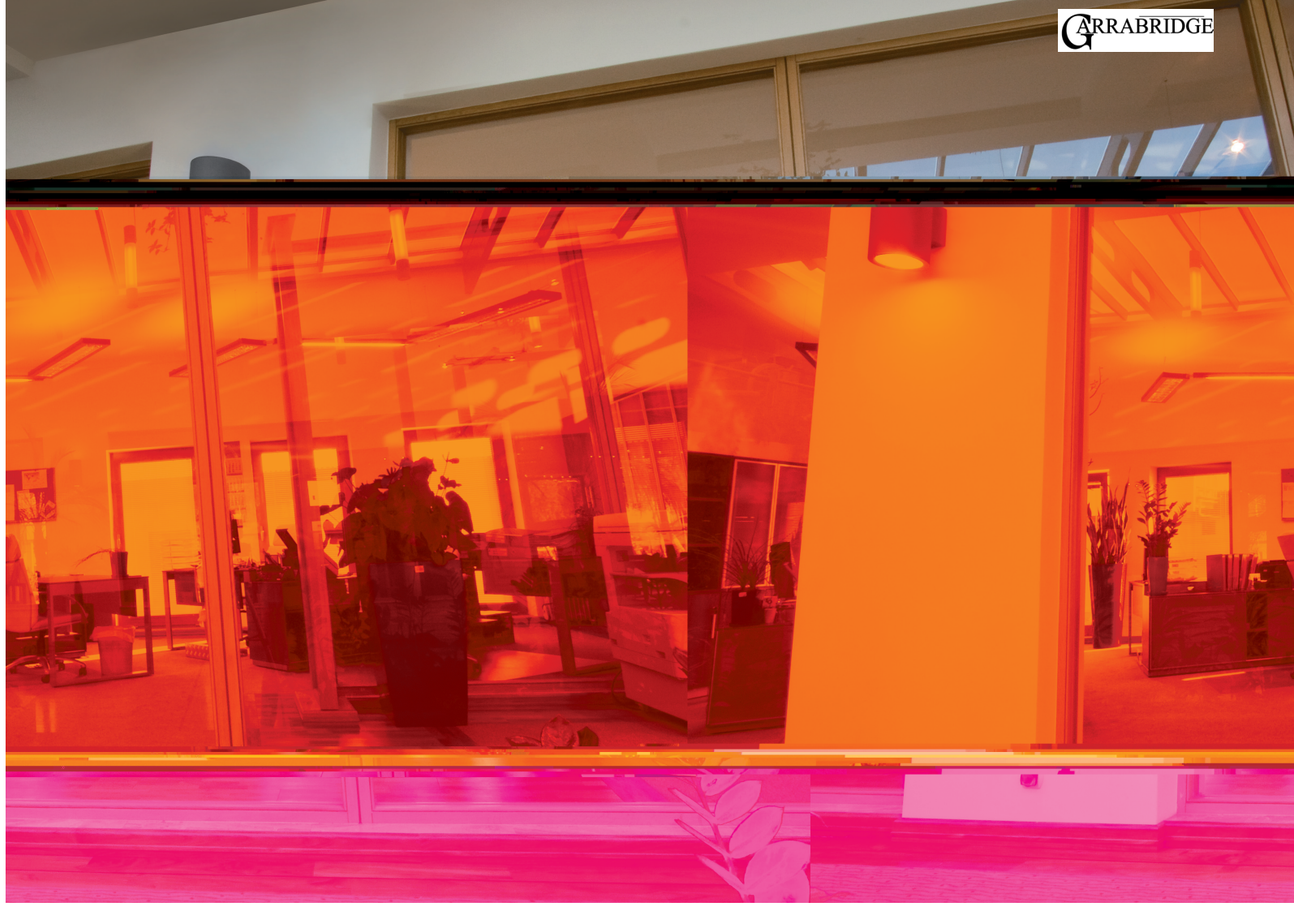

WALL LED SPOT

Wall mounted LED luminaire. Body is made of steel and aluminium and it is available in all RAL colours. Light source - Philips Fortimo SLM or Osram PrevaLED module. Standard EVG ballast, Touch DALI version on request (please add TD after index number).

High quality, energy efficient white LED light with CRI 80 and more.

Perfect replacement for conventional luminaires in:
- Offices
- Public buildings
- Hotel lobbies and receptions
- Retail



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003496.1100/830	1100 lm	12 W	3000 K	82 Ra	50,000 h	2,50 kg
0000-003496.1100/840	1100 lm	12 W	4000 K	82 Ra	50,000 h	2,50 kg
0000-003496.1100/927	1100 lm	12 W	2700 K	97 Ra	50,000 h	2,50 kg
0000-003496.1100/930	1100 lm	12 W	3000 K	97 Ra	50,000 h	2,50 kg
0000-003496.1100/940	1100 lm	12 W	4000 K	97 Ra	50,000 h	2,50 kg
0000-003496.2000/830	2000 lm	21 W	3000 K	82 Ra	50,000 h	2,50 kg
0000-003496.2000/840	2000 lm	21 W	4000 K	82 Ra	50,000 h	2,50 kg
0000-003496.2000/927	2000 lm	21 W	2700 K	97 Ra	50,000 h	2,50 kg
0000-003496.2000/930	2000 lm	21 W	3000 K	97 Ra	50,000 h	2,50 kg
0000-003496.2000/940	2000 lm	21 W	4000 K	97 Ra	50,000 h	2,50 kg
0000-003496.3000/830	3000 lm	30 W	3000 K	82 Ra	50,000 h	2,50 kg
0000-003496.3000/840	3000 lm	30 W	4000 K	82 Ra	50,000 h	2,50 kg
0000-003496.3000/927	3000 lm	30 W	2700 K	97 Ra	50,000 h	2,50 kg
0000-003496.3000/930	3000 lm	30 W	3000 K	97 Ra	50,000 h	2,50 kg
0000-003496.3000/940	3000 lm	30 W	4000 K	97 Ra	50,000 h	2,50 kg

IP20 230 V 50 Hz

GARRABRIDGE reserves rights to introduce any construction or technical changes in the products. Wattage of products may vary due to constant LED efficacy improvements.

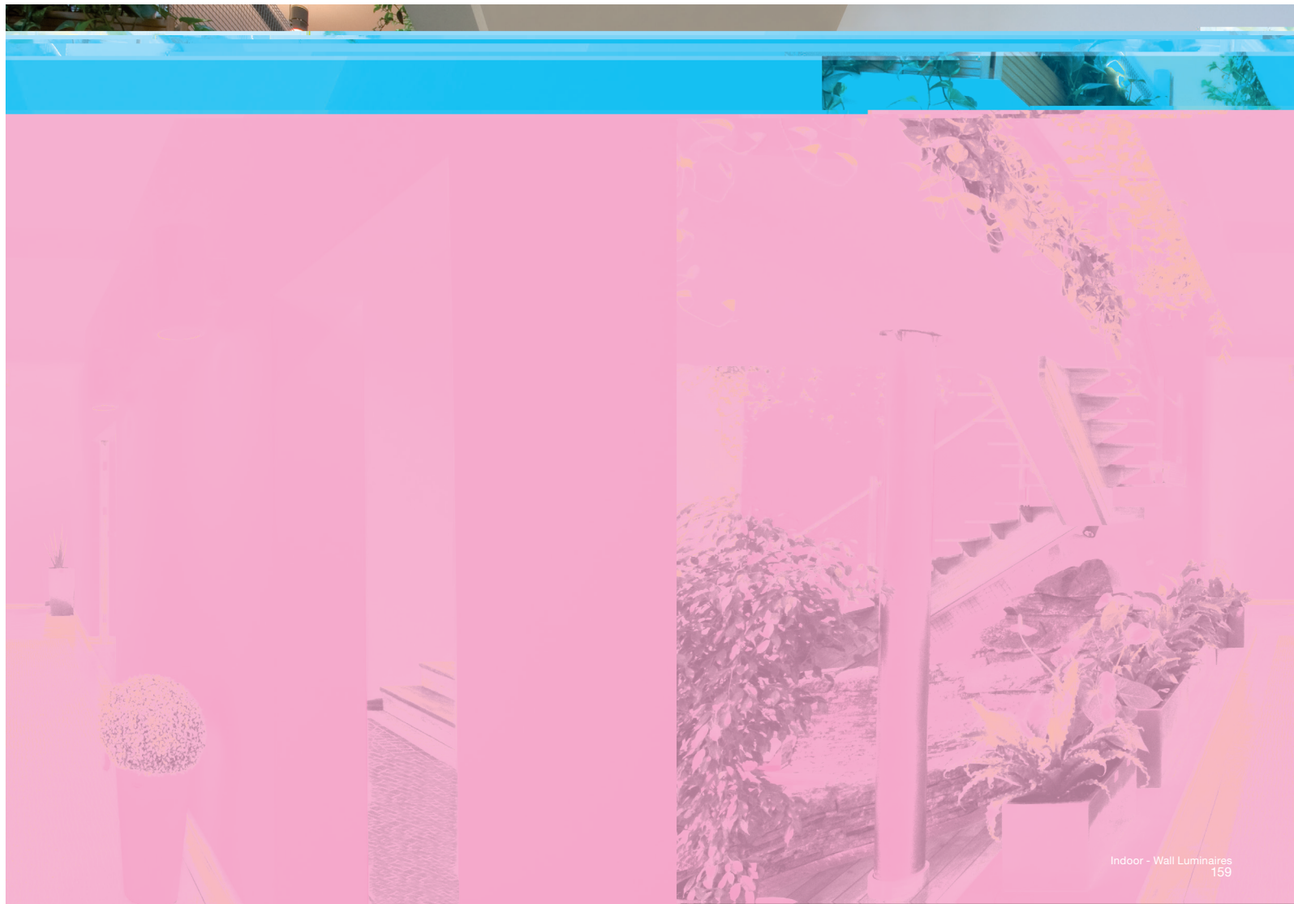

WL LED CUBE

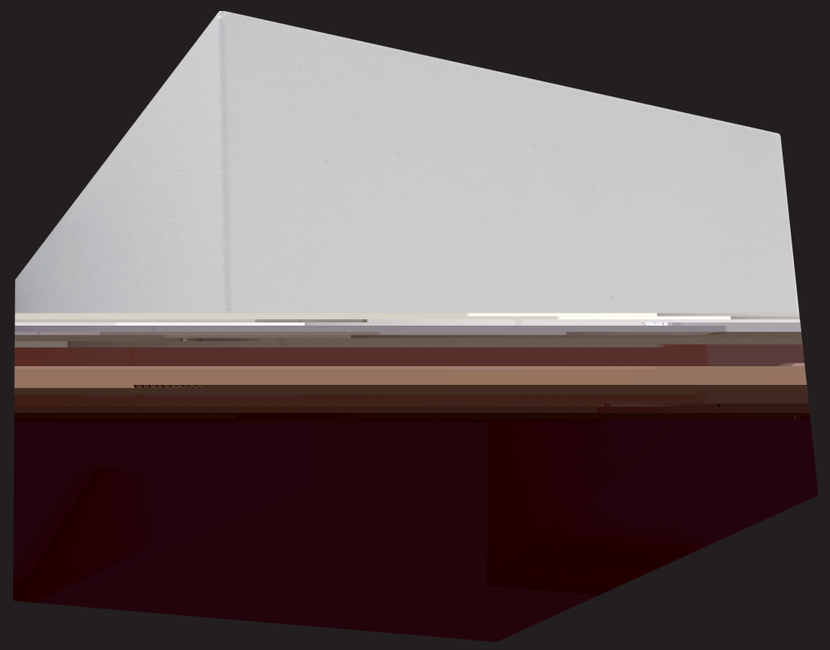

Wall mounted direct/indirect luminaire.
Body is made of aluminium.
All RAL colours are available.

Applications:
- Hospitality, healthcare and cruise ship applications: corridors, service areas, lobbies, lounges, restaurants, reception areas, waiting rooms
- Home
- Retail
- Office

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-004592.320/830	320 lm	4 W	3000 K	80 Ra	30,000 h	0,40 kg

IP20 230 V / 50 Hz



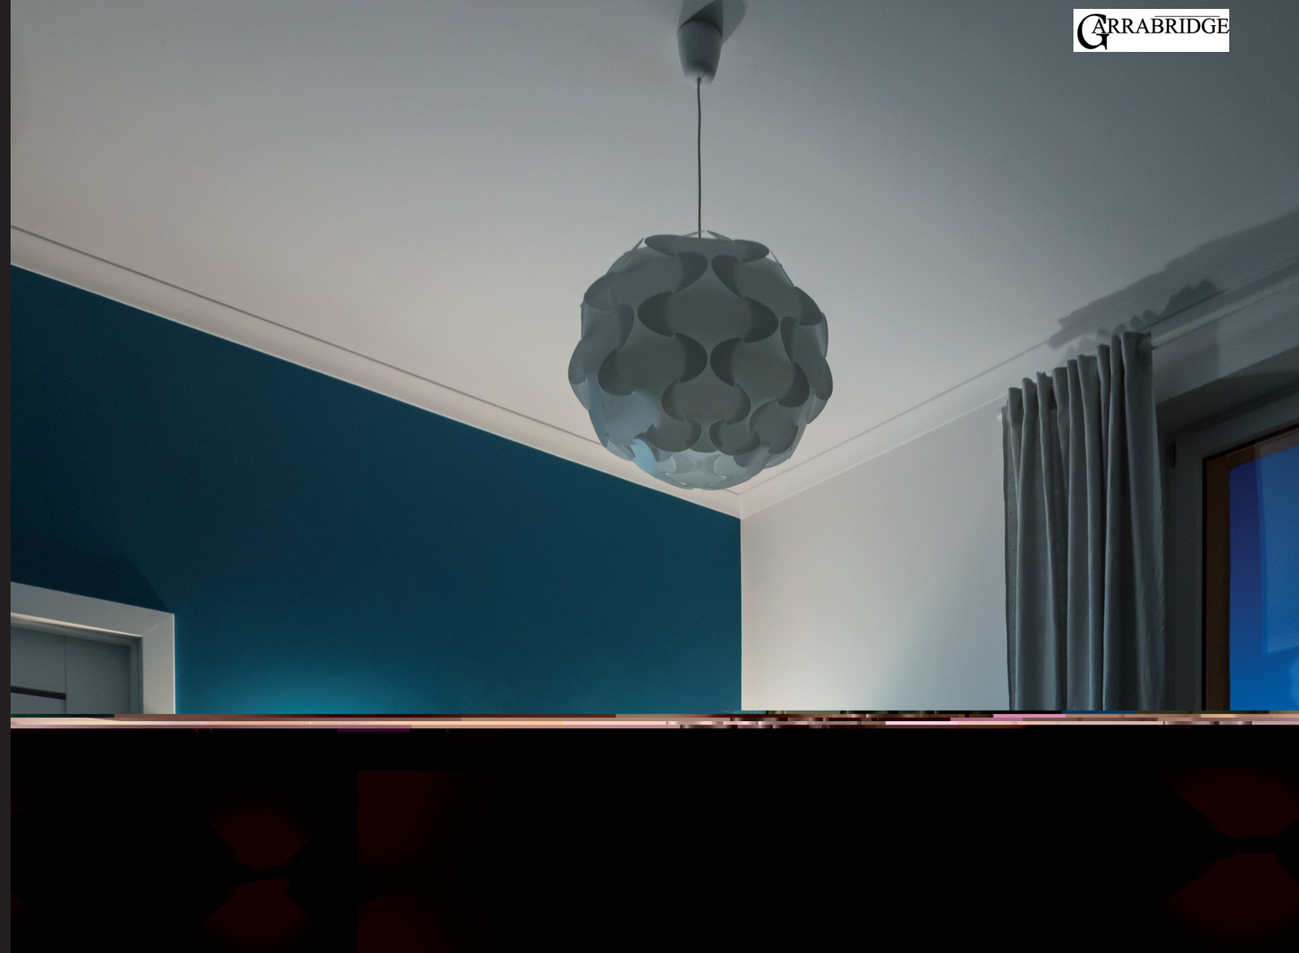

GARRABRIDGE reserves rights to introduce any construction or technical changes in the products.
Wattage of products may vary due to constant LED efficacy improvements.

WAVE

Wall mounted indirect luminaire. Body is made of aluminium.
All RAL colours are available.

Applications:
• Hospitality, healthcare and cruise ship applications: corridors, service areas, lobbies, lounges, restaurants, reception areas
• Home
• Retail
• Office



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-004590.320/830	320 lm	4 W	3000 K	80 Ra	30,000 h	0,60 kg

IP20 230 V 50 Hz

WL LED DECOR

Wall mounted direct/indirect luminaire. Body is made of aluminium. All RAL colours are available.

Applications:
• Hospitality, healthcare and cruise ship applications: corridors, service areas, lobbies, lounges, restaurants, reception areas
• Home
• Retail
• Office



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-004591.320/830	320 lm	4 W	3000 K	80 Ra	30,000 h	0,70 kg

IP20 230 V 50 Hz

GARRABRIDGE reserves rights to introduce any construction or technical changes in the products.
Wattage of products may vary due to constant LED efficacy improvements.

WALL 60 SQ DECOR

Wall mounted luminaire. Body is made of aluminium. All RAL colours are available. Light source - Philips MASTER LEDspot or Osram LED PARATHOM.

Applications:
• Hospitality, healthcare and cruise ship applications: corridors, service areas, lobbies, lounges, restaurants, reception areas
• Home
• Retail
• Office



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Beam angle	Weight
0000-004541.350/827/25D	350 lm	5,5 W	2700 K	80 Ra	40,000 h	25°	0,40 kg
0000-004541.350/827/40D	350 lm	5,5 W	2700 K	80 Ra	40,000 h	40°	0,40 kg
0000-004541.350/827/60D	350 lm	5,5 W	2700 K	80 Ra	40,000 h	60°	0,40 kg
0000-004541.375/830/25D	375 lm	5,5 W	3000 K	80 Ra	40,000 h	25°	0,40 kg
0000-004541.375/830/40D	375 lm	5,5 W	3000 K	80 Ra	40,000 h	40°	0,40 kg
0000-004541.375/830/60D	375 lm	5,5 W	3000 K	80 Ra	40,000 h	60°	0,40 kg
0000-004541.385/840/25D	385 lm	5,5 W	4000 K	80 Ra	40,000 h	25°	0,40 kg

IP20 230 V 50 Hz

WALL 60 SQ LED

Wall mounted direct/indirect luminaire. Body is made of aluminium. All RAL colours are available. Light source - Philips MASTER LEDspot or Osram LED PARATHOM.

Applications:
• Hospitality, healthcare and cruise ship applications: corridors, service areas, lobbies, lounges, restaurants, reception areas
• Home
• Retail
• Office



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Beam angle	Weight
0000-004551.2350/827/25D	2x350 lm	11 W	2700 K	80 Ra	40,000 h	25°	0,60 kg
0000-004551.2350/827/40D	2x350 lm	11 W	2700 K	80 Ra	40,000 h	40°	0,60 kg
0000-004551.2350/827/60D	2x350 lm	11 W	2700 K	80 Ra	40,000 h	60°	0,60 kg
0000-004551.2375/830/25D	2x375 lm	11 W	3000 K	80 Ra	40,000 h	25°	0,60 kg
0000-004551.2375/830/40D	2x375 lm	11 W	3000 K	80 Ra	40,000 h	40°	0,60 kg
0000-004551.2375/830/60D	2x375 lm	11 W	3000 K	80 Ra	40,000 h	60°	0,60 kg
0000-004551.2385/840/25D	2x385 lm	11 W	4000 K	80 Ra	40,000 h	25°	0,60 kg

IP20 230 V 50 Hz

GARRABRIDGE reserves rights to introduce any construction or technical changes in the products.
Wattage of products may vary due to constant LED efficacy improvements.

ECO LED SQ 120

Wall mounted direct/indirect luminaire. Body is made of aluminium. All RAL colours are available.

Applications:
• Hospitality, healthcare and cruise ship applications: corridors, service areas, lobbies, lounges, restaurants, reception areas
• Home
• Retail
• Office



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-004455.21000/830	2x1000 lm	30 W	3000 K	80 Ra	30,000 h	1,50 kg
0000-004455.21000/840	2x1000 lm	30 W	4000 K	80 Ra	30,000 h	1,50 kg

IP20 230 V 50 Hz

WALL LED SQ

Wall mounted LED luminaire. Body is made of steel and aluminium profile. All RAL colours are available. Light source - Philips Fortimo SLM or Osram PrevaLED module. Standard EVG ballast, Touch DALI version on request (please add TD after index number).

High quality, energy efficient white LED light with CRI 80 and more.

Perfect replacement for conventional luminaires in:
• Offices
• Public buildings
• Hotel lobbies and receptions
• Retail



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003598.1100/830	1100 lm	12 W	3000 K	82 Ra	50,000 h	2,94 kg
0000-003598.1100/840	1100 lm	12 W	4000 K	82 Ra	50,000 h	2,94 kg
0000-003598.1100/927	1100 lm	12 W	2700 K	97 Ra	50,000 h	2,94 kg
0000-003598.1100/930	1100 lm	12 W	3000 K	97 Ra	50,000 h	2,94 kg
0000-003598.1100/940	1100 lm	12 W	4000 K	97 Ra	50,000 h	2,94 kg
0000-003598.2000/830	2000 lm	21 W	3000 K	82 Ra	50,000 h	2,94 kg
0000-003598.2000/840	2000 lm	21 W	4000 K	82 Ra	50,000 h	2,94 kg
0000-003598.2000/927	2000 lm	21 W	2700 K	97 Ra	50,000 h	2,94 kg
0000-003598.2000/930	2000 lm	21 W	3000 K	97 Ra	50,000 h	2,94 kg
0000-003598.2000/940	2000 lm	21 W	4000 K	97 Ra	50,000 h	2,94 kg
0000-003598.3000/830	3000 lm	30 W	3000 K	82 Ra	50,000 h	2,94 kg
0000-003598.3000/840	3000 lm	30 W	4000 K	82 Ra	50,000 h	2,94 kg
0000-003598.3000/927	3000 lm	30 W	2700 K	97 Ra	50,000 h	2,94 kg
0000-003598.3000/930	3000 lm	30 W	3000 K	97 Ra	50,000 h	2,94 kg
0000-003598.3000/940	3000 lm	30 W	4000 K	97 Ra	50,000 h	2,94 kg

IP20 230 V 50 Hz

GARRABRIDGE reserves rights to introduce any construction or technical changes in the products.
Wattage of products may vary due to constant LED efficacy improvements.