




INDOOR 10

LED CLEAN ROOM LUMINAIRES

LWN 1200 OP LED



Recessed LED IP65 luminaire with opal diffuser designed for modular ceiling. Light source - Fortimo LED Line, PrevaLED Linear or Tridonic Stark LED module. Standard EVG ballast, Touch DALI version on request. Body is made of steel and aluminium and is available in all RAL colours. High quality, energy efficient white LED light with CRI 80. Perfect replacement for conventional T5 luminaires.

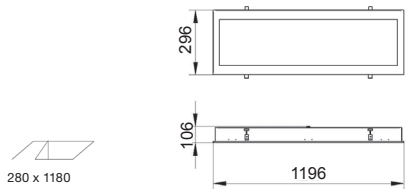


Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003754.ST5000/830	5000 lm	40 W	3000K	80 Ra	50,000 h	6,50 kg
0000-003754.ST5000/840	5000 lm	40 W	4000K	80 Ra	50,000 h	6,50 kg
0000-003754.LLS10000/830	10000 lm	69 W	3000K	80 Ra	50,000 h	6,50 kg
0000-003754.LLS10000/840	10000 lm	69 W	4000K	80 Ra	50,000 h	6,50 kg




LLS - Philips Fortimo LED LINE Square
ST - Tridonic Stark QLE


GARRABRIDGE reserves rights to introduce any construction or technical changes in the products.
Wattage of products may vary due to constant LED efficacy improvements.

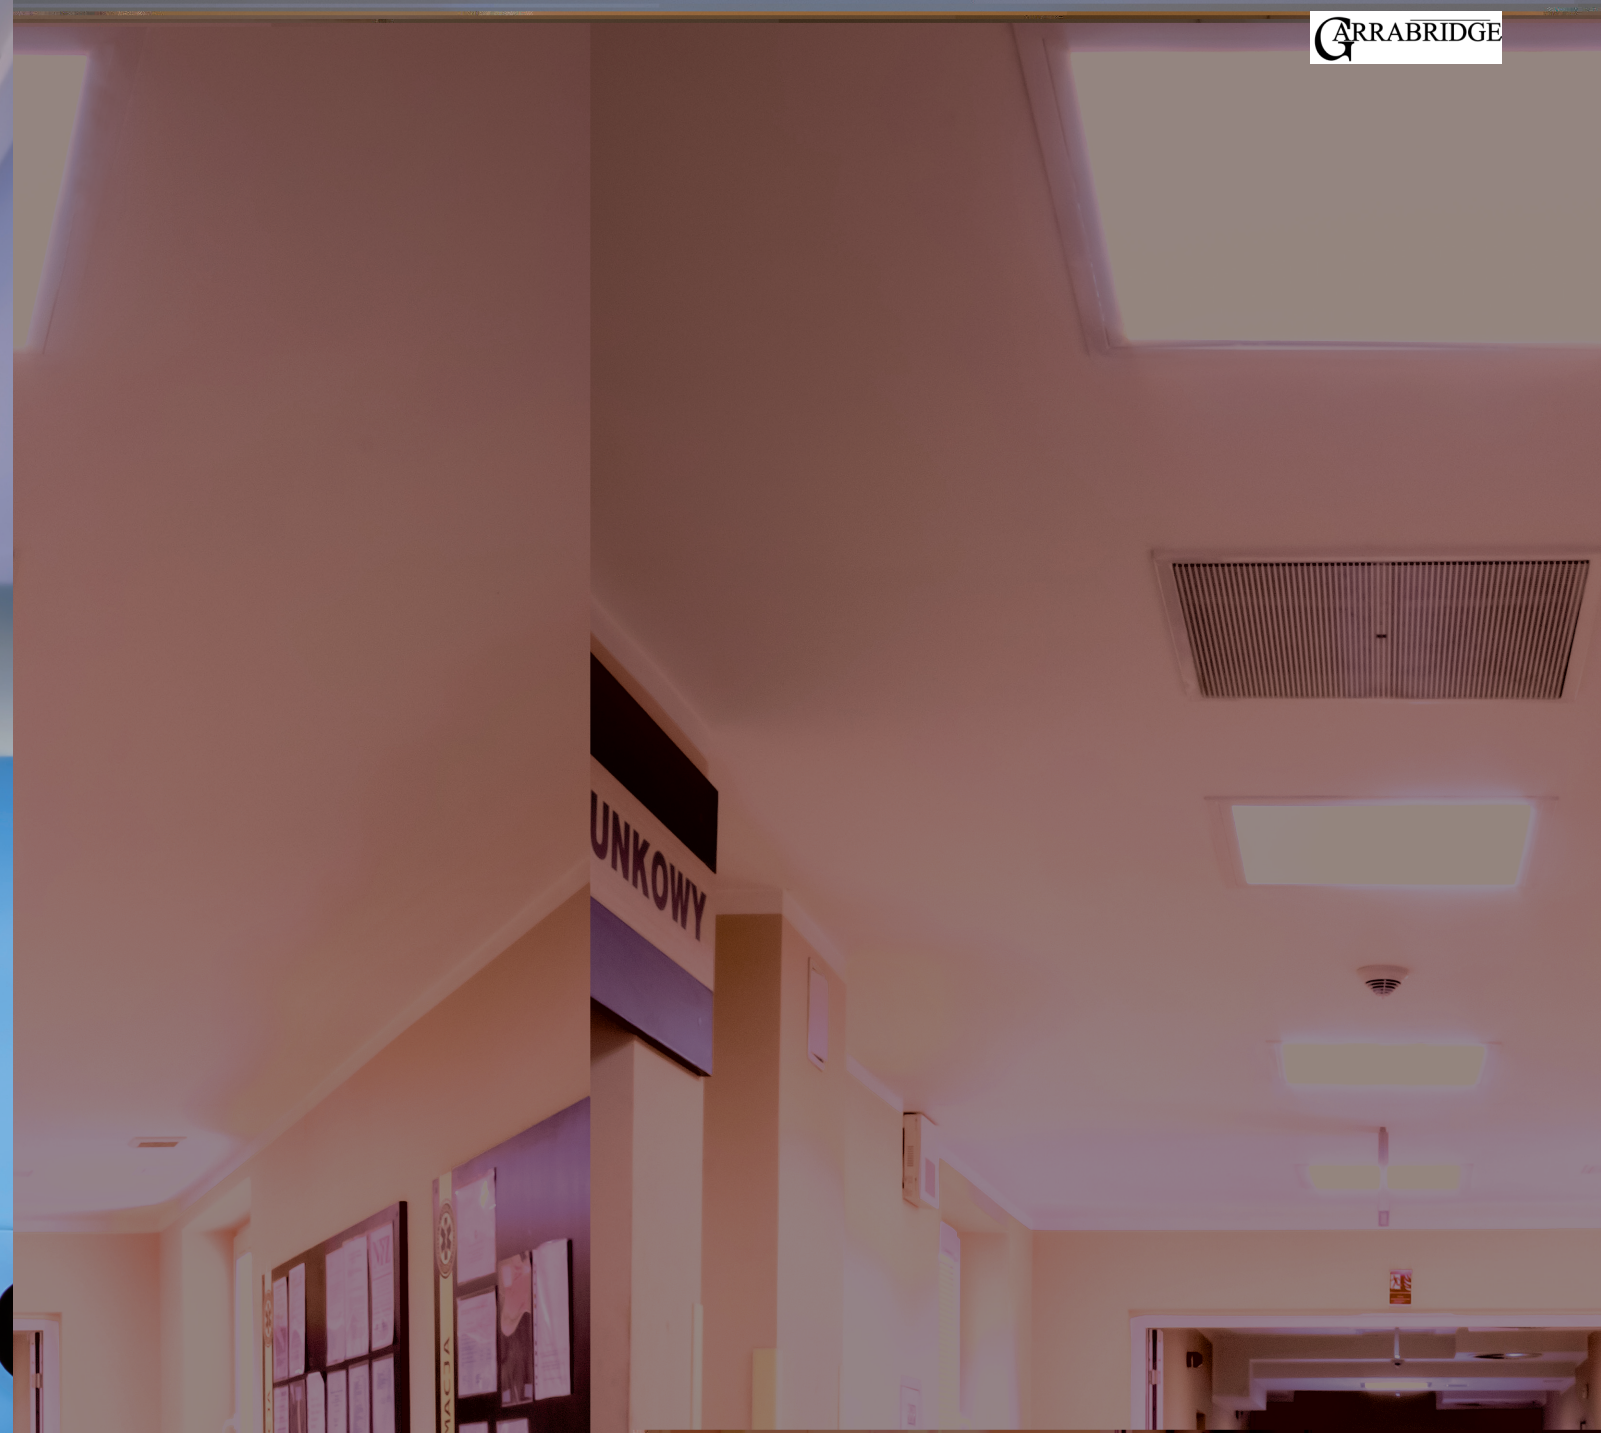

LWN 600 OP LED

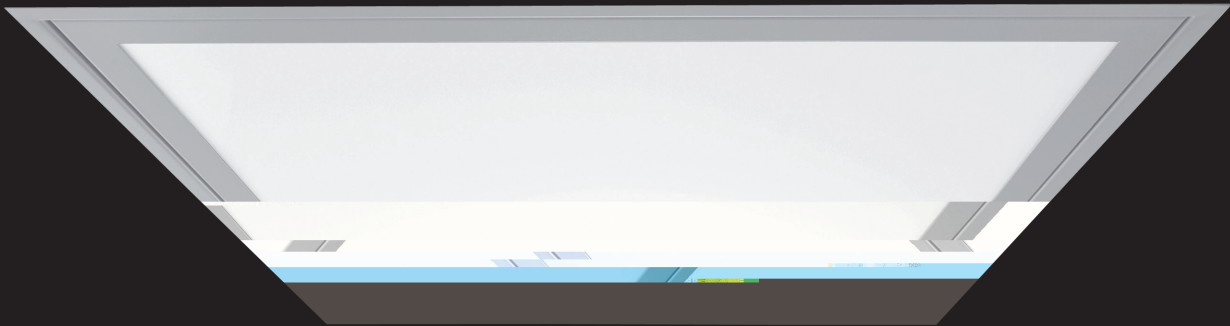

Recessed LED IP65 luminaire with opal diffuser designed for modular ceiling. Light source - Fortimo LED Line, PrevaLED Linear or Tridonic Stark LED module. Standard EVG ballast, Touch DALI version on request. Body is made of steel and aluminium and is available in all RAL colours. High quality, energy efficient white LED light with CRI 80. Perfect replacement for conventional T5 luminaires.

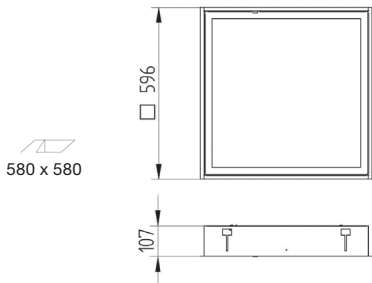

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Weight
0000-003509.ST5000/830	5000 lm	40 W	3000 K	80 Ra	50,000 h	6,50 kg
0000-003509.ST5000/840	5000 lm	40 W	4000 K	80 Ra	50,000 h	6,50 kg
0000-003509.LLS10000/830	10000 lm	69 W	3000 K	80 Ra	50,000 h	6,50 kg
0000-003509.LLS10000/840	10000 lm	69 W	4000 K	80 Ra	50,000 h	6,50 kg



LLS - Philips Fortimo LED LINE Square
ST - Tridonic Stark QLE

GARRABRIDGE reserves rights to introduce any construction or technical changes in the products.
Wattage of products may vary due to constant LED efficacy improvements.

