


TWINS



Universal two sided maintained LED emergency lighting fitting. Natural aluminium or black body finish. Charging time - 24 hours. Different pictograms on request.

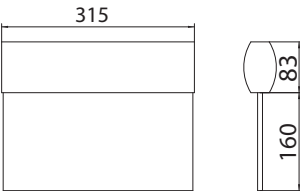


Index no.	Description	Wattage	Lifetime	Weight
0000-004583.1H	maintained 1 h emergency	1,2 W	50,000 h	1,10 kg
0000-004583.2H	maintained 2 h emergency	1,2 W	50,000 h	1,10 kg
0000-004583.3H	maintained 3 h emergency	1,2 W	50,000 h	1,10 kg
0000-004583.1H/AT	maintained 1 h emergency with autotest	1,2 W	50,000 h	1,40 kg
0000-004583.2H/AT	maintained 2 h emergency with autotest	1,2 W	50,000 h	1,40 kg
0000-004583.3H/AT	maintained 3 h emergency with autotest	1,2 W	50,000 h	1,40 kg




HELIOS LED





Universal two sided maintained LED emergency lighting fitting. White polycarbonate body, transparent or opal cover. Charging time - 24 hours. Different pictograms on request.

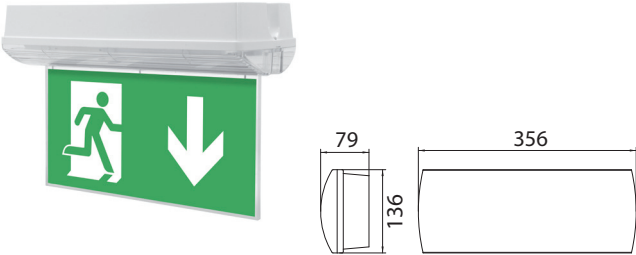


Index no.	Description	Wattage	Lifetime	Weight
0000-004582.1H	maintained 1 h emergency	1,2 W	50,000 h	1,30 kg
0000-004582.2H	maintained 2 h emergency	1,2 W	50,000 h	1,30 kg
0000-004582.3H	maintained 3 h emergency	1,2 W	50,000 h	1,30 kg
0000-004582.1H/AT	maintained 1 h emergency with autotest	1,2 W	50,000 h	1,60 kg
0000-004582.2H/AT	maintained 2 h emergency with autotest	1,2 W	50,000 h	1,60 kg
0000-004582.3H/AT	maintained 3 h emergency with autotest	1,2 W	50,000 h	1,60 kg

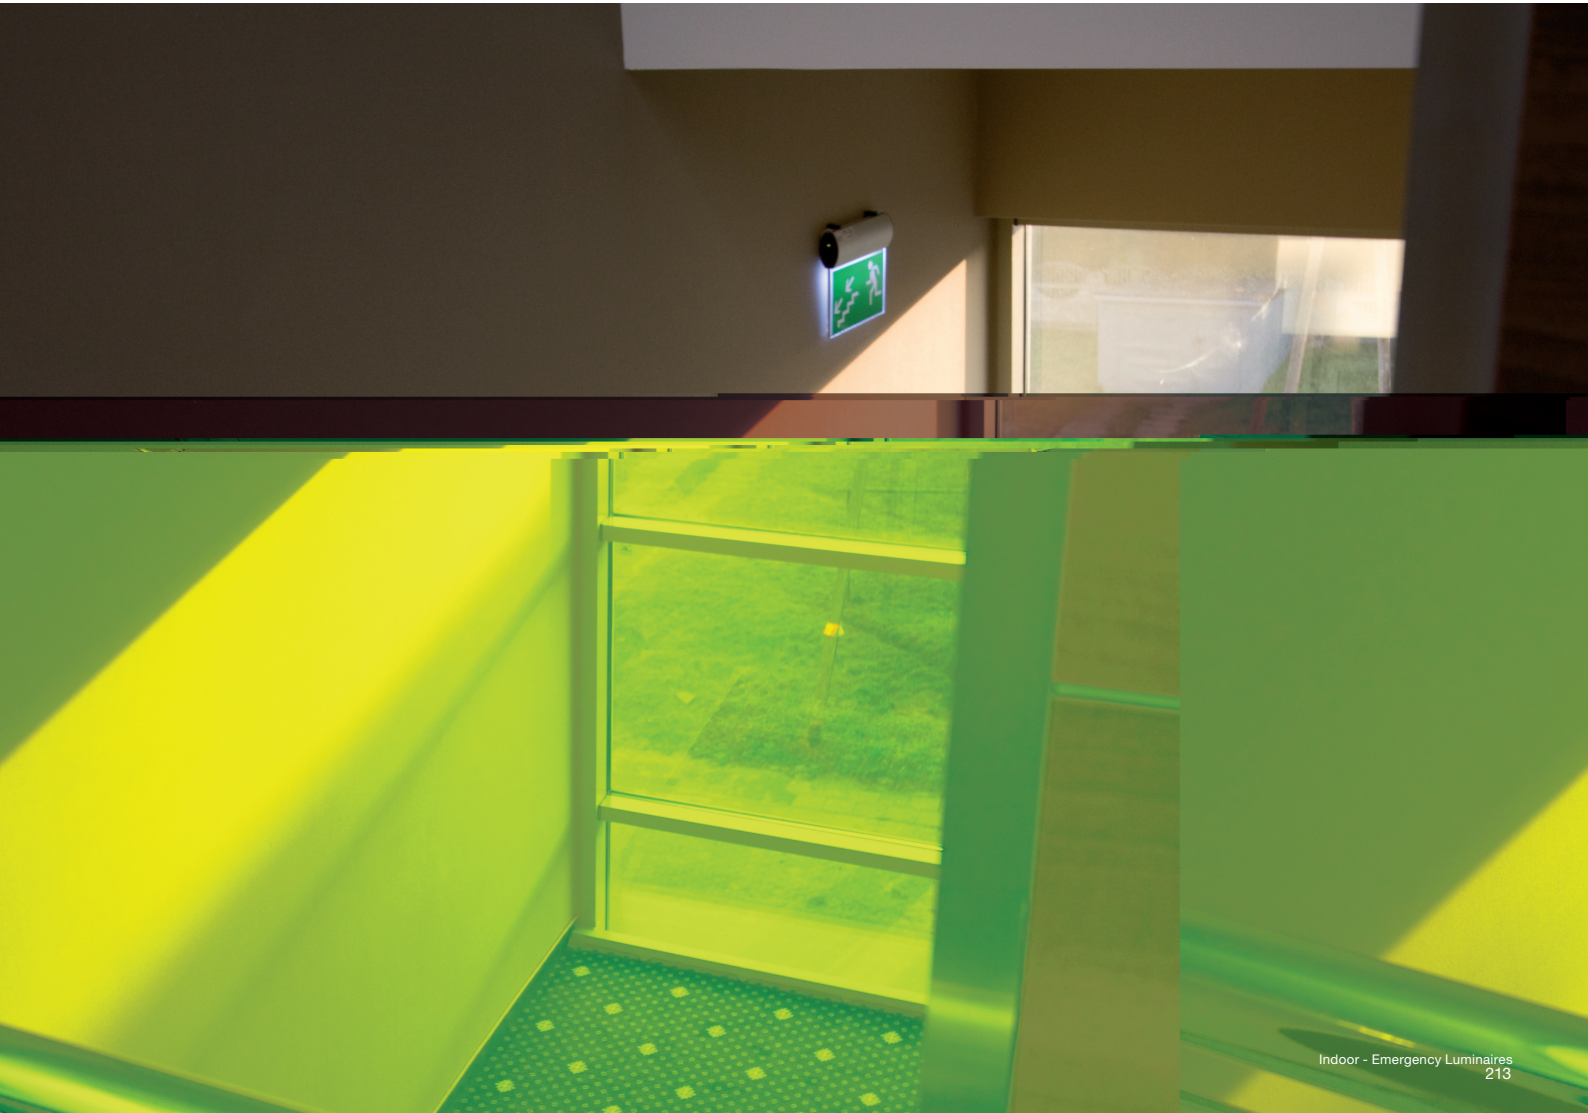

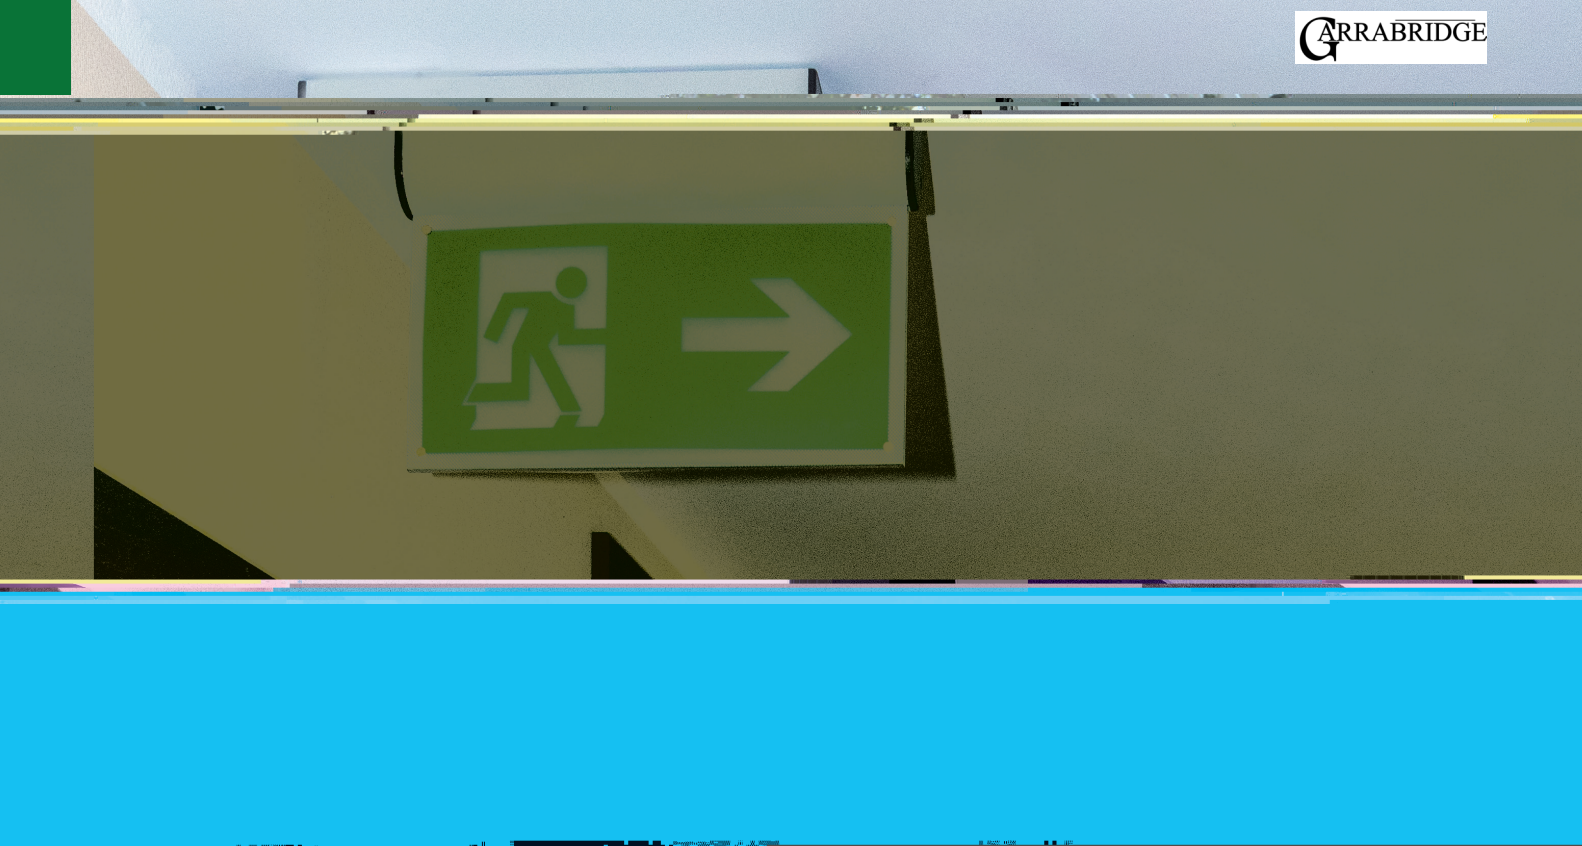


INFINITY

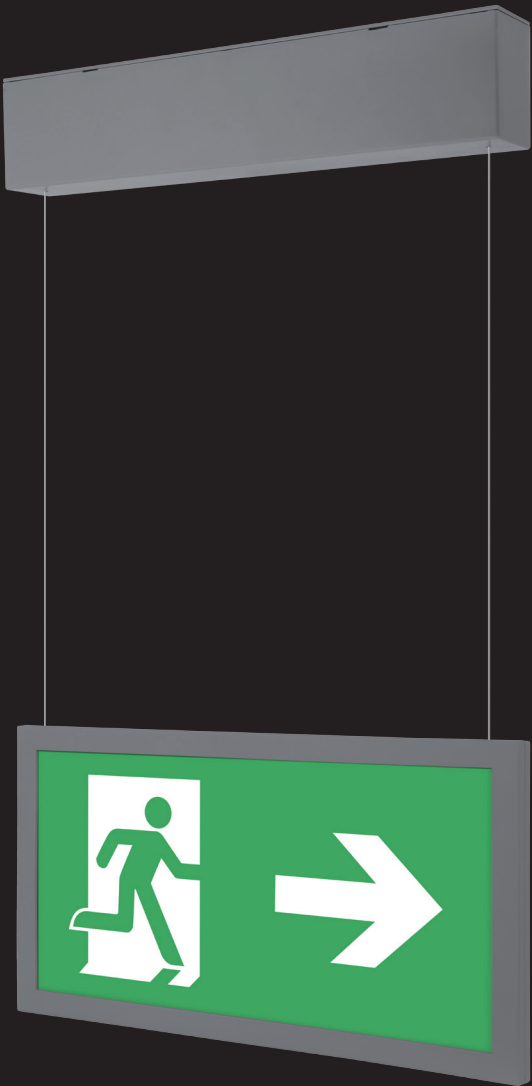

Universal maintained LED emergency lighting fitting. Body made of polycarbonate. Charging time - 24 hours. Different pictograms on request.


Index no.	Description	Wattage	Lifetime	Weight
0000-004579.1H	maintained 1 h emergency	1,2 W	50,000 h	1,30 kg
0000-004579.2H	maintained 2 h emergency	1,2 W	50,000 h	1,30 kg
0000-004579.3H	maintained 3 h emergency	1,2 W	50,000 h	1,30 kg
0000-004579.1H/AT	maintained 1 h emergency with autotest	1,2 W	50,000 h	1,60 kg
0000-004579.2H/AT	maintained 2 h emergency with autotest	1,2 W	50,000 h	1,60 kg
0000-004579.3H/AT	maintained 3 h emergency with autotest	1,2 W	50,000 h	1,60 kg

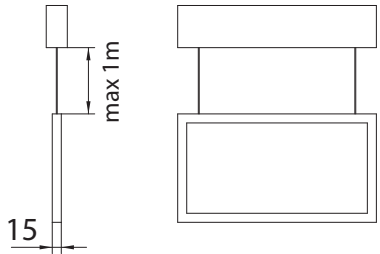

ONTEC A




Universal surface mounted maintained LED emergency lighting fitting. White polycarbonate body, transparent cover. Charging time - 24 hours. Different pictograms on request.

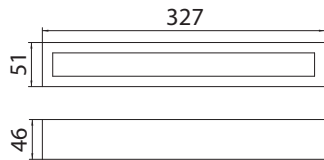


Index no.	Description	Wattage	Lifetime	Weight
0000-004581.3H	maintained 3 h emergency	1,2 W	50,000 h	0,70 kg
0000-004581.3H/AT	maintained 3 h emergency with autotest	1,2 W	50,000 h	0,70 kg



ONTEC P

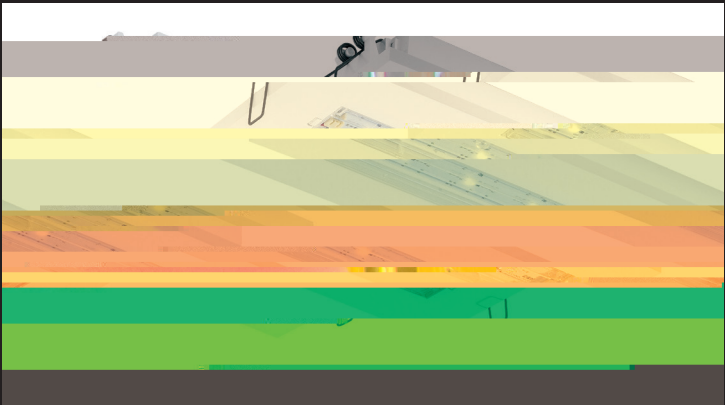

Universal recessed maintained LED emergency lighting fitting. White polycarbonate body, transparent cover. Charging time - 24 hours. Different pictograms on request.

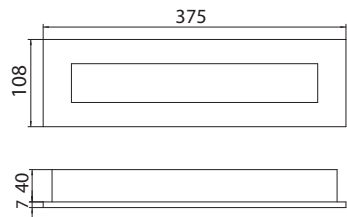

Index no.	Description	Wattage	Lifetime	Weight
0000-004580.3H	maintained 3 h emergency	1,2 W	50,000 h	0,80 kg
0000-004580.3H/AT	maintained 3 h emergency with autotest	1,2 W	50,000 h	0,80 kg

