






OUTDOOR 15

# LED GROUND MOUNTED LUMINAIRES




METEOR MINI LED

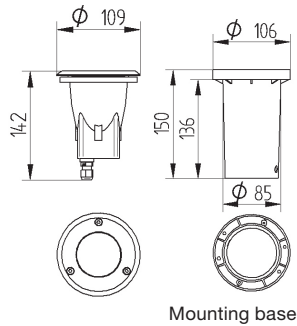

Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Socket	Beam angle	Weight
0000-002325.410/827/25D	410 lm	8 W	2700 K	80 Ra	40,000 h	GU10	25°	0,90 kg
0000-002325.410/827/40D	410 lm	8 W	2700 K	80 Ra	40,000 h	GU10	40°	0,90 kg
0000-002325.450/830/25D	450 lm	8 W	3000 K	80 Ra	40,000 h	GU10	25°	0,90 kg
0000-002325.450/830/40D	450 lm	8 W	3000 K	80 Ra	40,000 h	GU10	40°	0,90 kg
0000-002325.460/840/25D	460 lm	8 W	4000 K	80 Ra	40,000 h	GU10	25°	0,90 kg
0000-002325.460/840/40D	460 lm	8 W	4000 K	80 Ra	40,000 h	GU10	40°	0,90 kg



LED ONE



Index no.	Lumen output	Wattage	Colour temp.	Colour rendering index	Lifetime	Socket	Weight
0000-002426.410/827/25D	410 lm	8 W	2700 K	80 Ra	40,000 h	GU10	4,90 kg
0000-002426.410/827/40D	410 lm	8 W	2700 K	80 Ra	40,000 h	GU10	4,90 kg
0000-002426.450/830/25D	450 lm	8 W	3000 K	80 Ra	40,000 h	GU10	4,90 kg
0000-002426.450/830/40D	450 lm	8 W	3000 K	80 Ra	40,000 h	GU10	4,90 kg
0000-002426.460/840/25D	460 lm	8 W	4000 K	80 Ra	40,000 h	GU10	4,90 kg
0000-002426.460/840/40D	460 lm	8 W	4000 K	80 Ra	40,000 h	GU10	4,90 kg
0000-002426.51	---	5x1W	---	---	---	---	4,90 kg




## SLIM – LED ING 1



Ground recessed IP67 LED luminaire. Light source - PowerLED diods. Body is made of aluminium profile - standard gray, other colours on request. Diffuser - clear or mat tempered glass.


This luminaire is available with different colour temperatures of LED diodes listed below. Wattage and lumen output depends on the length and number of LED diodes in the luminaire. Single LED diode has 1,12W and lumen output of each diode depends on the colour temperature. For example, SLIM - LED ING 1 with 9 LED diodes and colour temperature of 4000K has 10,08 W and 810 lm.

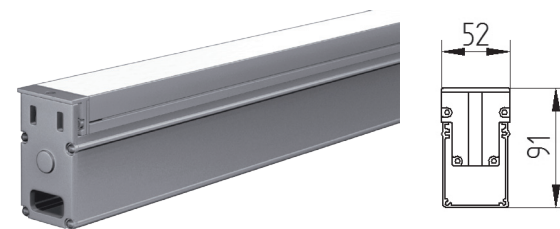

Index no.	Number of diods	Length	Weight
0000-003489.9	9	357 mm	1,00 kg
0000-003489.18	18	618 mm	1,80 kg
0000-003489.28	28	918 mm	2,80 kg
0000-003489.31	31	1000 mm	2,90 kg
0000-003489.38	38	1218 mm	3,90 kg




## SLIM – LED ING 2

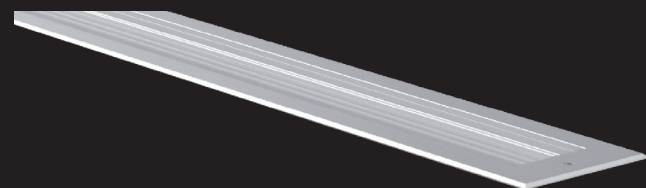

Ground recessed IP67 LED luminaire. Light source - PowerLED diods. Body is made of aluminium profile - standard gray, other colours on request. Diffuser - clear or mat tempered glass.

This luminaire is available with different colour temperatures of LED diodes listed below. Wattage and lumen output depends on the length and number of LED diodes in the luminaire. Single LED diode has 1,12W and lumen output of each diode depends on the colour temperature. For example, SLIM - LED ING 2 with 18 LED diodes and colour temperature of 4000K has 20,16W and 1620 lm.

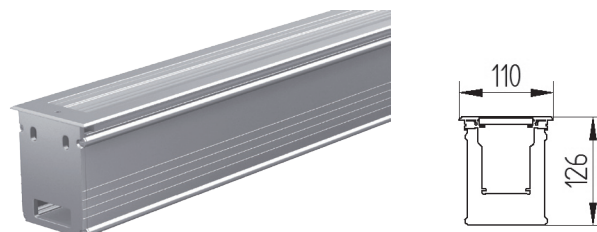

Index no.	Number of diods	Length	Weight
0000-003490.18	18	650 mm	4,90 kg
0000-003490.28	28	950 mm	6,40 kg
0000-003490.31	31	1000 mm	6,70 kg
0000-003490.38	38	1250 mm	7,90 kg




GARRABRIDGE reserves rights to introduce any construction or technical changes in the products. Wattage of products may vary due to constant LED efficacy improvements.

## SLIM – LED 1



Surface mounted IP67 LED luminaire. Light source - PowerLED diods. Body is made of aluminium profile - standard gray, other colours on request. Diffuser - clear or mat tempered glass.

This luminaire is available with different colour temperatures of LED diodes listed below. Wattage and lumen output depends on the length and number of LED diodes in the luminaire. Single LED diode has 1,12W and lumen output of each diode depends on the colour temperature. For example, SLIM - LED 1 with 9 LED diodes and colour temperature of 4000K has 10,08W and 810 lm.

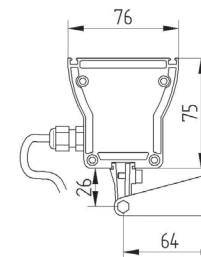


Index no.	Number of diods	Length	Weight
0000-003487.9	9	341 mm	1,20 kg
0000-003487.18	18	602 mm	1,80 kg
0000-003487.28	28	902 mm	2,40 kg
0000-003487.31	31	1000 mm	2,50 kg
0000-003487.38	38	1202 mm	3,20 kg
0000-003487.48	48	1502 mm	3,80 kg



Surface mounted IP67 LED luminaire. Light source - PowerLED diods. Body is made of aluminium profile - standard gray, other colours on request. Diffuser - clear or mat tempered glass.


This luminaire is available with different colour temperatures of LED diodes listed below. Wattage and lumen output depends on the length and number of LED diodes in the luminaire. Single LED diode has 1,12W and lumen output of each diode depends on the colour temperature. For example, SLIM - LED 2 with 18 LED diodes and colour temperature of 4000K has 20,16W and 1620 lm.

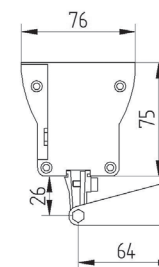

Index no.	Number of diods	Length	Weight
0000-003488.18	18	597 mm	1,80 kg
0000-003488.31	31	1000 mm	2,50 kg
0000-003488.38	38	1300 mm	3,50 kg




GARRABRIDGE reserves rights to introduce any construction or technical changes in the products. Wattage of products may vary due to constant LED efficacy improvements.

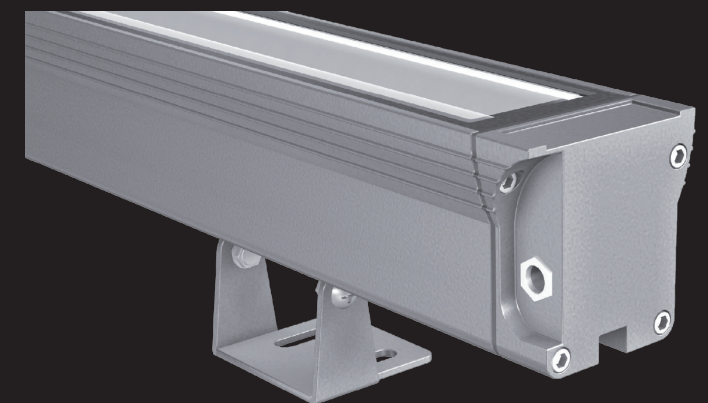




## LED FLOOD 18

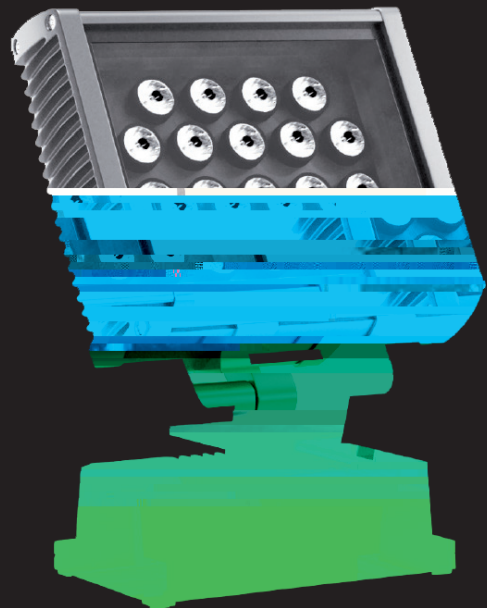

Ground mounted LED IP65 spot lamp. Light source - PowerLED diods. Body is made of die cast aluminium - standard gray, other colours on request. Diffuser - clear or mat tempered glass.

This luminaire is available with different colour temperatures of LED diodes listed below. Wattage and lumen output depends on the length and number of LED diodes in the luminaire. Single LED diode has 1,12W and lumen output of each diode depends on the colour temperature. For example, LED FLOOD 18 with 18 LED diodes and colour temperature of 4000K has 20,16W and 1620 lm.

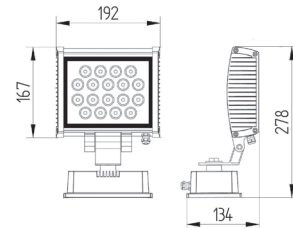

Index no.	Number of diods	Weight
0000-003501.18	18	1,70 kg




## LED FLOOD 36



Ground mounted LED IP65 spot lamp. Light source - PowerLED diods. Body is made of die cast aluminium - standard gray, other colours on request. Diffuser - clear or mat tempered glass.

This luminaire is available with different colour temperatures of LED diodes listed below. Wattage and lumen output depends on the length and number of LED diodes in the luminaire. Single LED diode has 1,12W and lumen output of each diode depends on the colour temperature. For example, LED FLOOD 36 with 36 LED diodes and colour temperature of 4000K has 43,2W and 3240 lm.

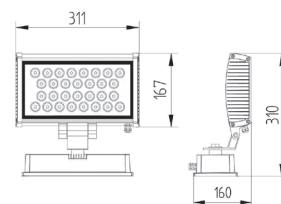

Index no.	Number of diods	Weight
0000-003502.36	36	2,50 kg

