

27

EMERGENCY LUMINAIRES


Emergency and evacuation lighting fixture. Available with different pictograms - listed below.

- IP44
- 230 V
50 Hz
-
-
- CE



Index no.	Lamp	Weight	Socket
0000-002795.18-E1	1x8W T5, 1h standard version with emergency unit	0,80 kg	G5
0000-002795.18-E3	1x8W T5, 3h standard version with emergency unit	0,95 kg	G5
0000-002789.16-E1	1x6W, 1h	0,70 kg	G5
0000-002793.18-E1	1x8W, 1h	0,80 kg	G5
0000-002793.18-E3	1x8W, 3h	0,95 kg	G5
0000-002794.111-E1	1x11W PL-S	0,90 kg	2G7

L x B x H
6W - 59 x 112,5 x 45,5 mm
8W - 336,4 x 134,6 x 46,8 mm
11W - 281 x 95 x 54 mm




Emergency and evacuation lighting fixture. Available with different pictograms - listed below.

- IP44
- 230 V
50 Hz
-
-
- CE



Index no.	Lamp	Weight	Socket
0000-003091.110E	EVG, 1x10W, 1h emergency unit	1,50 kg	G24-q1

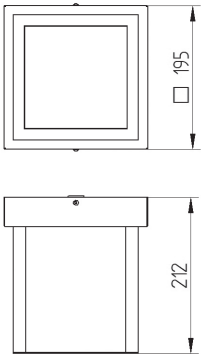



WAWEL 1





Hermetic emergency lighting fitting with the protection level IP65, made of polycarbonate (PC). Designed to lighten evacuation routes in public buildings. During emergency operation, light source operates with reduced luminous flux.

- IP65
- 230 V
50 Hz
-
-
- CE



Index no.	Lamp
0000-003563.118E/1H	1x18W T8, 1H emergency
0000-003563.136E/1H	1x36W T8, 1H emergency
0000-003563.158E/1H	1x58W T8, 1H emergency
0000-003563.118E/3H	1x18W T8, 3H emergency
0000-003563.136E/3H	1x36W T8, 3H emergency
0000-003563.158E/3H	1x58W T8, 3H emergency





WAWEL 2

Hermetic emergency lighting fitting with the protection level IP65, made of polycarbonate (PC). Designed to lighten evacuation routes in public buildings. During emergency operation, light sources operate with reduced luminous flux.

- IP65
- 230 V
50 Hz
-
-
- CE




Index no.	Lamp
0000-003563.218E/1H	2x18W T8, 1H emergency
0000-003563.236E/1H	2x36W T8, 1H emergency
0000-003563.258E/1H	2x58W T8, 1H emergency
0000-003563.218E/3H	2x18W T8, 3H emergency
0000-003563.236E/3H	2x36W T8, 3H emergency
0000-003563.258E/3H	2x58W T8, 3H emergency



One-sided emergency and evacuation lighting fittings with the protection level IP65, made of polycarbonate (PC). They are designed to lighten exits and to indicate evacuation routes in public buildings. During emergency operation, operate with reduced luminous flux.



Index no.	Lamp
0000-003558.8E/3H	1x8W T5, 3H emergency

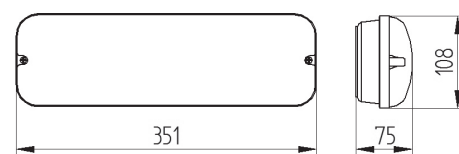

VENUS



Double-sided emergency and evacuation lighting fittings with the protection level IP65, made of polycarbonate (PC). They are designed to lighten exits and to indicate evacuation routes in public buildings. During emergency operation, light sources operate with reduced luminous flux.

Index no.	Lamp
0000-002873.8E/1H	1x8W T5, 1H emergency
0000-002873.11E/1H	1x11W PL-S, 1H emergency
0000-002873.8E/3H	1x8W T5, 3H emergency
0000-002873.11E/3H	1x11W PL-S, 3H emergency

