



STILO
D100 154 HF PC

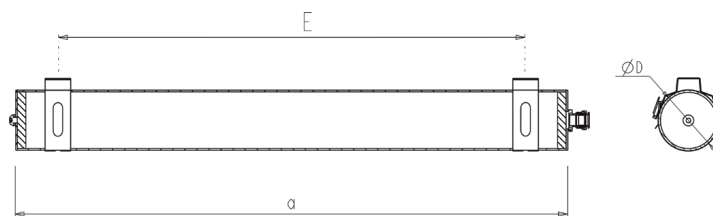


OPTIONS

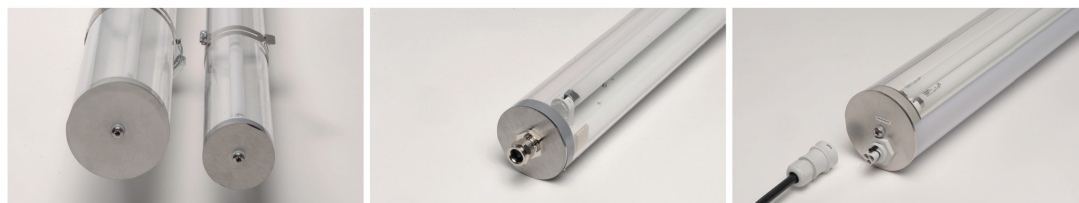

	a	E	D
STILO D100 114 - 124 - 214 - 224	644	550	100
STILO D100 121 - 139 - 221 - 239	944	850	100
STILO D100 128 - 154 - 228 - 254	1244	1150	100
STILO D100 135 - 149 - 180 - 235 - 249	1544	1450	100
STILO D70 114 - 124	647	550	70
STILO D70 121 - 139	947	850	70
STILO D70 128 - 154	1247	1150	70
STILO D70 135 - 149 - 180	1547	1450	70

IP68 waterproof T5 tubular luminaire.

- Mounting: surface or wall-mounted using stainless steel fastening brackets (to be ordered separately); connection through waterproof stuffing box or waterproof WIELAND® connector (on request)
- Lighting source: T5 fluorescent tubes
- Electrical equipment: HF electronic ballast (dimming on request)
- Housing/Optical system: sheath made of bi-material (clear/opaque) co-extruded polycarbonate (PC), thickness 2 mm; internal gear tray made of white lacquered steel sheet; end-caps made of stainless steel, with internal neoprene gasket ensuring sealing by expansion (IP68 2m)



STILO
D100 154 HF PC

DESIGNATION	W	Ballast	Optic.	LOR
STILO D100 114 HF PC	1x14W	HF	PC	> 0,70
STILO D100 124 HF PC	1x24W	HF	PC	> 0,70
STILO D100 121 HF PC	1x21W	HF	PC	> 0,70
STILO D100 139 HF PC	1x39W	HF	PC	> 0,70
STILO D100 128 HF PC	1x28W	HF	PC	> 0,70
STILO D100 154 HF PC	1x54W	HF	PC	> 0,70
STILO D100 135 HF PC	1x35W	HF	PC	> 0,70
STILO D100 149 HF PC	1x49W	HF	PC	> 0,70
STILO D100 180 HF PC	1x80W	HF	PC	> 0,70
STILO D100 214 HF PC	2x14W	HF	PC	> 0,50
STILO D100 224 HF PC	2x24W	HF	PC	> 0,50
STILO D100 221 HF PC	2x21W	HF	PC	> 0,50
STILO D100 239 HF PC	2x39W	HF	PC	> 0,50
STILO D100 228 HF PC	2x28W	HF	PC	> 0,50
STILO D100 254 HF PC	2x54W	HF	PC	> 0,50
STILO D100 235 HF PC	2x35W	HF	PC	> 0,50
STILO D100 249 HF PC	2x49W	HF	PC	> 0,50
STILO D70 114 HF PC	1x14W	HF	PC	> 0,80
STILO D70 124 HF PC	1x24W	HF	PC	> 0,80
STILO D70 121 HF PC	1x21W	HF	PC	> 0,80
STILO D70 139 HF PC	1x39W	HF	PC	> 0,80
STILO D70 128 HF PC	1x28W	HF	PC	> 0,80
STILO D70 154 HF PC	1x54W	HF	PC	> 0,80
STILO D70 135 HF PC	1x35W	HF	PC	> 0,80
STILO D70 149 HF PC	1x49W	HF	PC	> 0,80
STILO D70 180 HF PC	1x80W	HF	PC	> 0,80